

DUAL 4-CHANNEL MULTIPLEXER

GENERAL DESCRIPTION


The NJU4052B is a dual 4-channel multiplexer with two binary control inputs and an inhibit input.

The two binary control input signals select 1 of 4 pairs of channels to be turned on and connect them to the two outputs.


The operating voltage is as wide as 3 to 18V and the quiescent current is as low as $5\mu\text{A}$ max. (at $V_{DD}=5\text{V}$).

It is equivalent to RCA CD4052B and Motorola MC14052B.


PACKAGE OUTLINE



NJU4052BD



NJU4052BM




NJU4052BV

6


FEATURES

- High ON/OFF Output Voltage Ratio --- 65dB Typ.
($R_L=10\text{k}\Omega$)
- Low Quiescent Current --- $5\mu\text{A}$ Typ. at $V_{DD}=5\text{V}$
- Low Crosstalk between channels --- 80dB Typ.
- Wide Operating Voltage Range. --- 3 ~ 18V
- Linearity in the transfer characteristics.
 $\Delta R_{ON} < 60\Omega$ ($V_{IN}=V_{DD} \sim V_{EE}$, $V_{DD}=15\text{V}$)
- Package Outline --- DIP/DMP/SSOP 16
- C-MOS Technology


BLOCK DIAGRAM

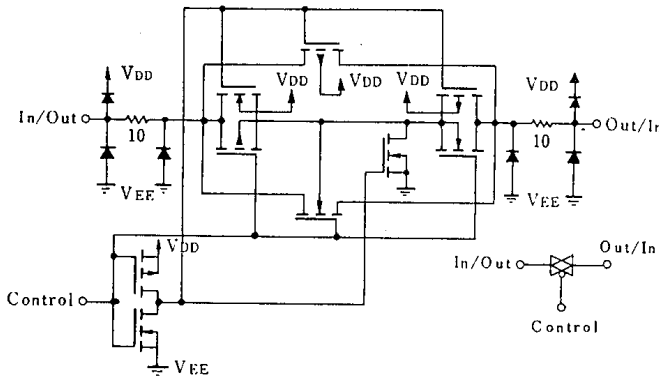

PIN CONFIGURATION

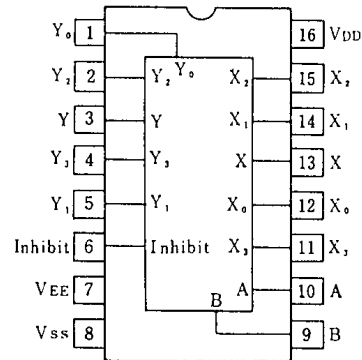

EQUIVALENT CIRCUIT

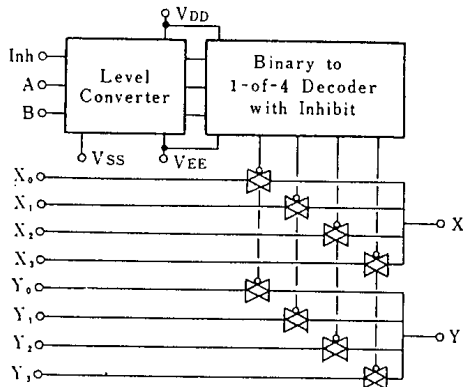

TRUTH TABLE

INH	B	A	On Switch	
0	0	0	Y_0	X_0
0	0	1	Y_1	X_1
0	1	0	Y_2	X_2
0	1	1	Y_3	X_3
1	x	x	None	

x: Don't Care

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{DD} - V_{EE}$	- 0.5 ~ + 20	V
Input Voltage(Control Signal)	V_{IN}	$V_{SS}-0.5 \sim V_{DD}+0.5$	V
Input Voltage(Analog Signal)	V_{SIG}	$V_{EE}-0.5 \sim V_{DD}+0.5$	V
Input Current	I_{IN}	± 10	mA
Output Current	I_{OUT}	± 10	mA
Power Dissipation	P_D	500 (DIP) 200 (DMP) 300 (SSOP)	mW
Operating Temperature Range	T_{opr}	- 40 ~ + 85	°C
Storage Temperature Range	T_{stg}	- 65 ~ + 150	°C

6
■ ELECTRICAL CHARACTERISTICS

• DC Characteristics

 ($V_{SS}=0V$)

PARAMETER	SYMBOL	CONDITIONS	V_{DD} (V)	$T_a=-40^\circ\text{C}$		$T_a=25^\circ\text{C}$			$T_a=85^\circ\text{C}$		UNIT
				MIN	MAX	MIN	TYP	MAX	MIN	MAX	
Quiescent Current	I_{DD}	No signal Per Package	5 10 15 20	5 10 20 100		5 10 20 100		150 300 600 3000		μA	
On-State Resistance	R_{ON}	$0 \leq V_{IS} \leq V_{DD}$ $V_{EE}=V_{SS}=0V$	5 10 15	500 210 140		220 100 60	600 250 160	800 300 200		Ω	
On-State Resistance Deviation	ΔR_{ON}	Between 2 channels $V_{EE}=V_{SS}=0V$	5 10 15			15 10 5				Ω	
Off-Channel Leakage Current		Each channel $V_{EE}=V_{SS}=0V$	18	± 1000		± 10	± 100	± 1000		nA	
Input Capacitance	C_{IN}	$V_{IN}=0V$ Control Inhibit Switch				5.0 10	7.5			pF	
Low Level Input Voltage	V_{IL}	$R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$	$V_o=1.0V$ 5 $V_o=1.0V$ 10 $V_o=1.5V$ 15	1.5 3.0 4.0		1.5 3.0 4.0		1.5 3.0 4.0		V	
High Level Input Voltage	V_{IH}		$V_o=4.0V$ 5 $V_o=9.0V$ 10 $V_o=13.5V$ 15	3.5 7.0 11.0		3.5 7.0 11.0		3.5 7.0 11.0		V	
Input Current	$\pm I_{IN}$		$V_{IN}=0$ or 18V	18	± 0.1		± 0.1		± 1		μA

■ SWITCHING CHARACTERISTICS


 ($T_a=25^\circ\text{C}$, $C_L=50\text{pF}$)

PARAMETER		SYMBOL	CONDITIONS	V_{DD} (V)	MIN	TYP	MAX	UNIT
Propagation Delay Time	SW Input to Output	t_{PLH}	$R_L=10\text{k}\Omega$	5	15	45	ns	
				10	8	30		
				15	5	20		
		t_{PHL}		5	15	45		
	10			8	30			
	15			5	20			
	CONT Input to Output	t_{PHL}		5	450	1000		ns
				10	200	500		
t_{PZH}		5	450	1000				
		10	200	500				
t_{PZL}	5	150	400					
	10	150	400					
Output Enable Time		t_{PHZ}	$R_L=10\text{k}\Omega$	5	600	1400	ns	
		t_{PLZ}		10	250	700		
				15	200	500		
Output Disable Time				5	600	1400	ns	
				10	250	700		
				15	200	500		
Sine-Wave Distortion			$R_L=10\text{k}\Omega$, $f=1\text{kHz}$, $V_{IS}=5V_{P-P}$	10	0.05		%	
Feedthrough (all-ch. off)			$R_L=1\text{k}\Omega$, $20\log_{10}V_{os}/V_{IS}=-50\text{dB}$	10	4.5		MHz	
Crosstalk	SW A to B		$R_L=1\text{k}\Omega$, $V_{IS}=1/2(V_{DD}-V_{SS})_{P-P}$	10	3.0		MHz	
	Control-Out		$R_L=1\text{k}\Omega$, $R_L=10\text{k}\Omega$, $t_r=t_f=20\text{ns}$ CONTROL/INHIBIT	10	30		mV	


6

MEASUREMENT CIRCUITS



1. Noise Margin

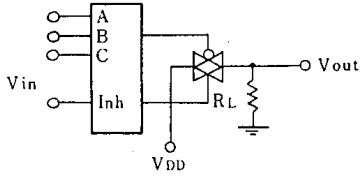



2. Propagation Delay

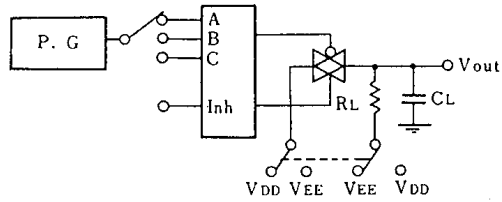


3. Feedthrough

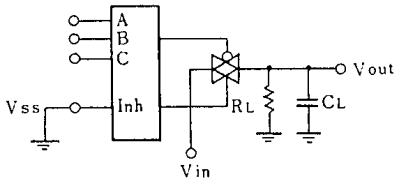

4. Crosstalk (Switch A and B)

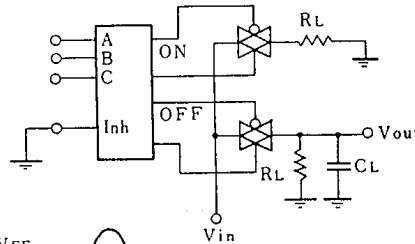

5. Crosstalk (Control and Out)

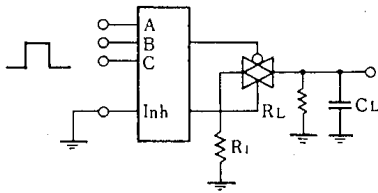

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.