

February 2008

MM74HC86 Quad 2-Input Exclusive OR Gate

Features

- Typical propagation delay: 9ns
- Wide operating voltage range: 2V–6V
- Low input current: 1µA maximum
- Low quiescent current: 20µA maximum (74 Series)
- Output drive capability: 10 LS-TTL loads

General Description

The MM74HC86 EXCLUSIVE OR gate utilizes advanced silicon-gate CMOS technology to achieve operating speeds similar to equivalent LS-TTL gates while maintaining the low power consumption and high noise immunity characteristic of standard CMOS integrated circuits. These gates are fully buffered and have a fanout of 10 LS-TTL loads. The 74HC logic family is functionally as well as pin out compatible with the standard 74LS logic family. All inputs are protected from damage due to static discharge by internal diode clamps to V_{CC} and ground.

Ordering Information


Order Number	Package Number	Package Description
MM74HC86M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow
MM74HC86SJ	M14D	14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
MM74HC86MTC	MTC14	14-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
MM74HC86N	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.

All packages are lead free per JEDEC: J-STD-020B standard.

Connection Diagram


Pin Assignments for DIP, SOIC, SOP and TSSOP



Truth Table

Inp	uts	Outputs			
Α	В	Y			
L	L	L			
L	Н	Н			
Н	L	Н			
Н	Н	L			

$$\mathsf{Y}=\mathsf{A}\oplus\mathsf{B}=\overline{\mathsf{A}}\;\mathsf{B}+\mathsf{A}\overline{\mathsf{B}}$$



Absolute Maximum Ratings⁽¹⁾

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating
V _{CC}	Supply Voltage	-0.5 to +7.0V
V _{IN}	DC Input Voltage	–1.5 to V _{CC} +1.5V
V _{OUT}	DC Output Voltage	–0.5 to V _{CC} +0.5V
I _{IK} , I _{OK}	Clamp Diode Current	±20mA
I _{OUT}	DC Output Current, per pin	±25mA
I _{CC}	DC V _{CC} or GND Current, per pin	±50mA
T _{STG}	Storage Temperature Range	–65°C to +150°C
P _D	Power Dissipation Note 2	600mW
	S.O. Package only	500mW
TL	Lead Temperature (Soldering 10 seconds)	260°C

Notes:

1. Unless otherwise specified all voltages are referenced to ground.

2. Power Dissipation temperature derating - plastic "N" package: -12mW/°C from 65°C to 85°C.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min.	Max.	Units
V _{CC}	Supply Voltage	2	6	V
V _{IN} , V _{OUT}	DC Input or Output Voltage	0	V _{CC}	V
T _A	Operating Temperature Range	-40	+85	°C
t _r , t _f	Input Rise or Fall Times			
	$V_{CC} = 2.0V$		1000	ns
	$V_{CC} = 4.5V$		500	ns
	$V_{CC} = 6.0 V$		400	ns

				$T_A =$	25°C	T _A =-40°C to 85°C	T _A = –55°C to 125°C	
Symbol	Parameter	V _{CC} (V)	Conditions	Тур.		Guaranteed	Limits	Unit
V_{IH}	Minimum HIGH Level	2.0			1.5	1.5	1.5	V
	Input Voltage	4.5			3.15	3.15	3.15	
		6.0			4.2	4.2	4.2	
V _{IL}	Maximum LOW Level	2.0			0.5	0.5	0.5	V
	Input Voltage	4.5			1.35	1.35	1.35	1
		6.0			1.8	1.8	1.8	1
V _{OH}	Minimum HIGH Level	2.0	$V_{IN} = V_{IH} \text{ or } V_{IL},$	2.0	1.9	1.9	1.9	V
	Output Voltage	4.5	I _{OUT} ≤ 20μΑ	4.5	4.4	4.4	4.4	1
	6.0		6.0	5.9	5.9	5.9	İ	
	4.5	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT} \le 4.0 \text{mA}$	4.2	3.98	3.84	3.7		
		6.0	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT} \le 5.2 \text{mA}$	5.7	5.48	5.34	5.2	
V _{OL} Maximum LOW Level	2.0	$V_{IN} = V_{IH} \text{ or } V_{IL},$	0	0.1	0.1	0.1	V	
	Output Voltage	4.5	I _{OUT} ≤ 20μΑ	0	0.1	0.1	0.1	1
		6.0		0	0.1	0.1	0.1	İ
		4.5	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT} \le 4.0 \text{mA}$	0.2	0.26	0.33	0.4	
		6.0	$V_{IN} = V_{IH} \text{ or } V_{IL},$ $ I_{OUT} \le 5.2 \text{mA}$	0.2	0.26	0.33	0.4	
I _{IN}	Maximum Input Current	6.0	$V_{IN} = V_{CC}$ or GND		±0.1	±1.0	±1.0	μA
I _{CC}	Maximum Quiescent Supply Current	6.0	$V_{IN} = V_{CC}$ or GND, $I_{OUT} = 0\mu A$		2.0	20	40	μA

DC Electrical Characteristics⁽³⁾

3. For a power supply of 5V ±10% the worst case output voltages (V_{OH}, and V_{OL}) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case V_{IH} and V_{IL} occur at V_{CC} = 5.5V and 4.5V respectively. (The V_{IH} value at 5.5V is 3.85V.) The worst case leakage current (I_{IN}, I_{CC}, and I_{OZ}) occur for CMOS at the higher voltage and so the 6.0V values should be used.

AC Electrical Characteristics

 $V_{CC} = 5V, T_A = 25^{\circ}C, C_L = 15pF, t_r = t_f = 6ns$

Symbol	Parameter	Conditions	Тур.	Guaranteed Limit	Units
t _{PHL} , t _{PLH}	Maximum Propagation Delay		12	20	ns


AC Electrical Characteristics

 $V_{CC} = 2.0V$ to 6.0V, $C_L = 50pF$, $t_r = t_f = 6ns$ (unless otherwise specified)

				T _A =	25°C	T _A = -40°C to 85°C	T _A = -55°C to 125°C	
Symbol	Parameter	V _{CC} (V)	Conditions	Тур.		Guaranteed	Limits	Units
t _{PHL} , t _{PLH}	Maximum	2.0		60	120	151	179	ns
	Propagation Delay	4.5		12	24	30	36	
		6.0		10	20	26	30	
t _{TLH} , t _{THL}	Maximum Output	2.0		30	75	95	110	ns
	Rise and Fall Time	4.5		8	15	19	22	
		6.0		7	13	16	19	
C _{PD}	Power Dissipation Capacitance ⁽⁴⁾		(per gate)	25				pF
C _{IN}	Maximum Input Capacitance			5	10	10	10	pF

Note:

4. C_{PD} determines the no load dynamic power consumption, $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$, and the no load dynamic current consumption, $I_S = C_{PD} V_{CC} f + I_{CC}$.

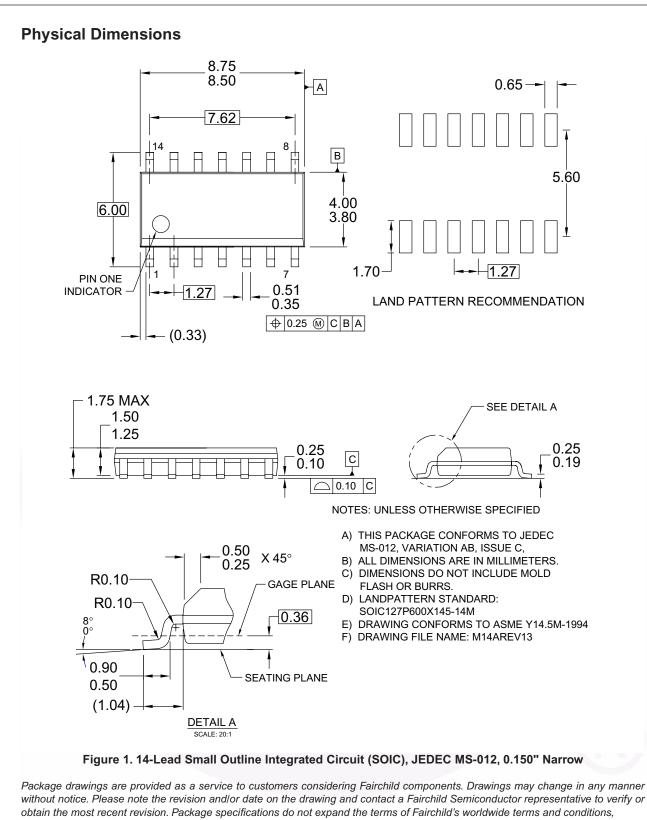


specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/packaging/

Downloaded from Elcodis.com electronic components distributor

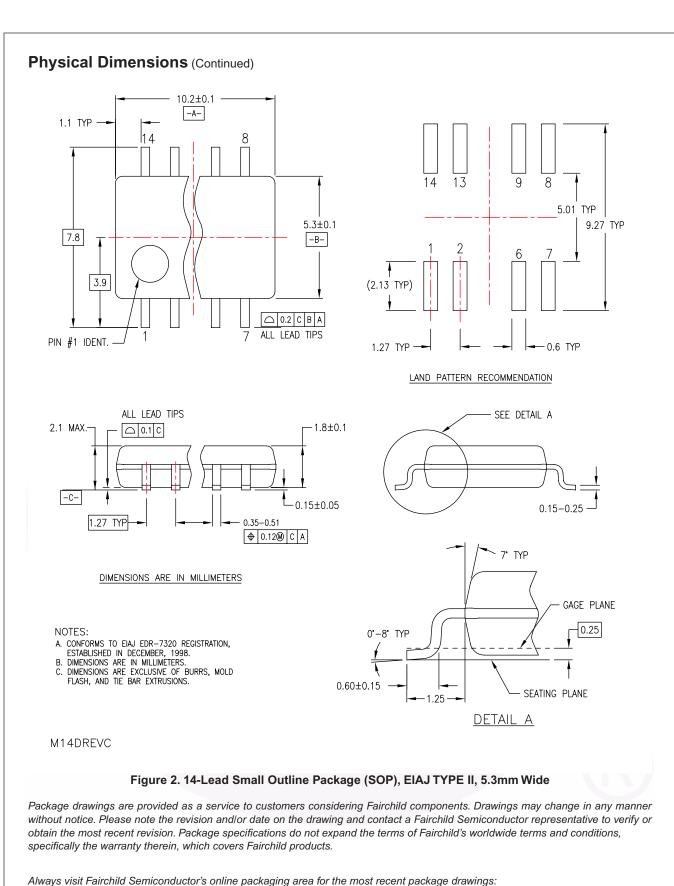


MM74HC86 Rev. 1.3.0

©1983 Fairchild Semiconductor Corporation


http://www.fairchildsemi.com/packaging/

6

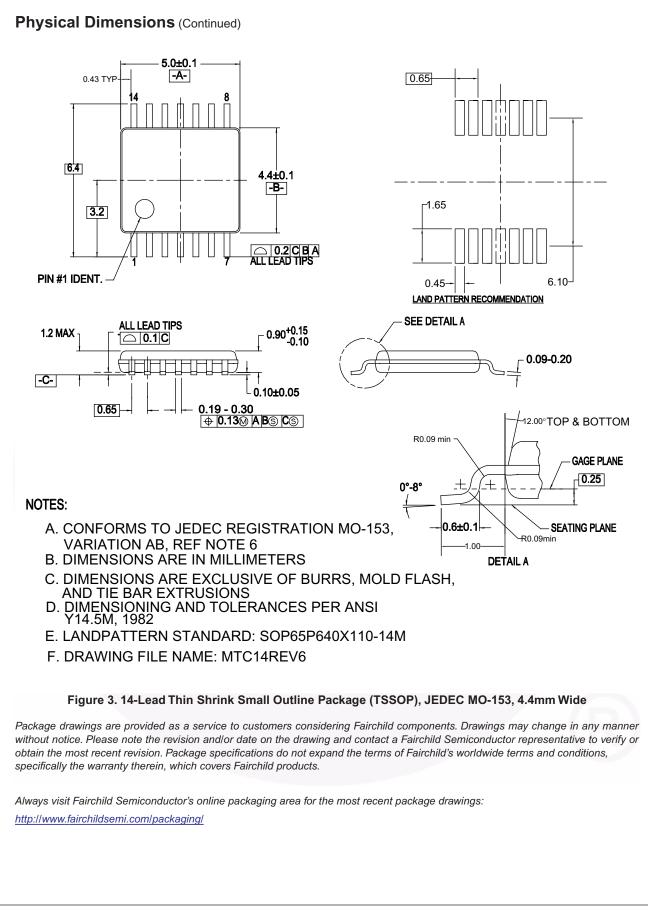

Downloaded from Elcodis.com electronic components distributor

MM74HC86 — Quad 2-Input Exclusive OR Gate

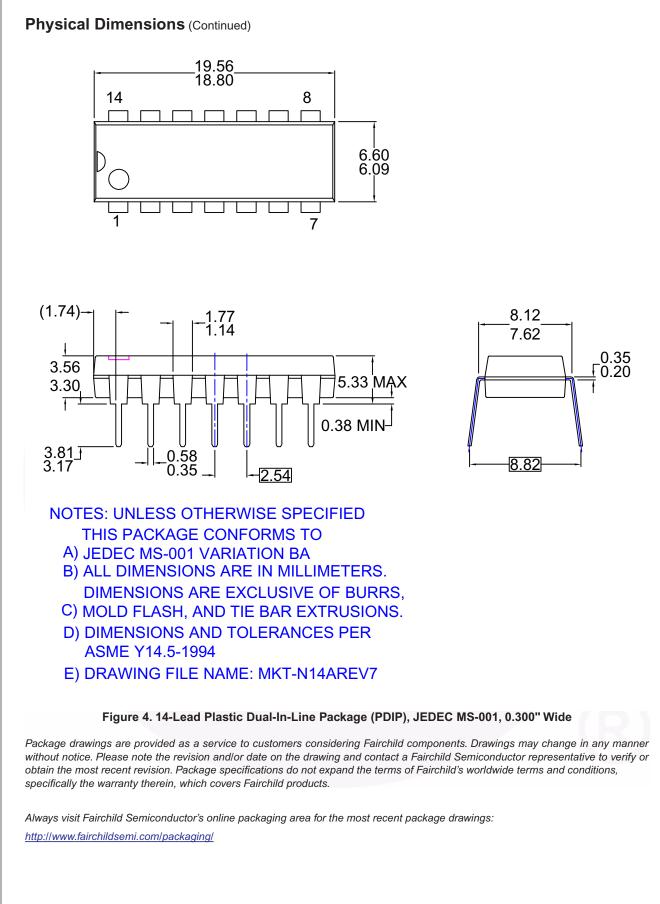

MM74HC86 Rev. 1.3.0

©1983 Fairchild Semiconductor Corporation



SEMICONDUCTOR

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

ACEx [®] Build it Now TM CorePLUS TM CROSSVOLT TM CTL TM Current Transfer Logic TM EcoSPARK [®] EZSWITCH TM * $\overbrace{e}^{\mathbb{C}}^{\mathbb{C}}$ Fairchild [®] Fairchild [®] Fairchild Semiconductor [®] FACT Quiet Series TM FACT [®] FAST [®] FastvCore TM	FPS [™] FRFET [®] Global Power Resource SM Green FPS [™] e-Series [™] GTO [™] <i>i-Lo</i> [™] IntelliMAX [™] ISOPLANAR [™] MegaBuck [™] MICROCOUPLER [™] MicroFET [™] MicroFET [™] MicroPak [™] MillerDrive [™] Motion-SPM [™] OPTOLOGIC [®] OPTOPLANAR [®]	QS [™] QT Optoelectronics [™] Quiet Series [™] RapidConfigure [™] SMART START [™] SPM [®] STEALTH [™] SuperFET [™] SuperFET [™] SuperSOT [™] 3 SuperSOT [™] 6	SupreMOS [™] SyncFET [™] General The Power Franchise [®] pranchise TinyBuck [™] TinyBuck [™] TinyLogic [®] TINYOPTO [™] TinyPOwer [™] TinyPWM [™] TinyPWM [™] TinyWire [™] µSerDes [™] UHC [®] Ultra FRFET [™] UniFET [™]
FlashWriter ^{®*}		SuperSOT™8	VCX™

* EZSWITCH™ and FlashWriter[®] are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 1. Life support devices or systems are devices or systems 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.

PRODUCT STATUS DEFINITIONS

©1983 Fairchild Semiconductor Corporation MM74HC86 Rev. 1.3.0

Downloaded from Elcodis.com electronic components distributor