

## Features



- IEEE 802.3ah™-2004 1000BASE-PX20 GE-PON ONU side application
- China EPON standard OAM control
- Single SMF 1310nm/1490nm bi-directional transmission with symmetric 1.25Gbps upstream/downstream
- Up to 32 subscribers within 20km radius
- “Plug-and-play” via auto-discovery and configuration
- Optical link measurement and diagnosis
- Secure access via Access Control List (ACL)
- Triple Churning Key decryption
- IEEE 802.3ah Forward Error Correction (FEC)
- Highly flexible 802.1Q VLAN support
- 802.1p/q support
- Advanced QoS functions enable billing by Service Level Agreement (SLA)
- IGMP Snooping
- 1.5MB of integrated packet buffering
- Operating case temperature: -30~75°C
- RoHS compliance

## Description

Source Photonics SPS-34-GB-P2-EDFM is an IEEE 802.3ah-compliant Ethernet Passive Optical Network (EPON) Optical Network Units (ONU) with Small Form-factor Pluggable (SFP) packaging. The SPS-34-GB-P2-EDFM integrates a bi-directional optical transceiver function and an EPON MAC function. By being plugged into the customer premise equipment (CPE) with standard SFP port directly, the SPS-34-GB-P2-EDFM provides a symmetric 1.25Gbps upstream/downstream EPON uplink to the CPE without requiring separate power supply.

The SPS-34-GB-P2-EDFM supports all the functions needed to comply with the China standard for EPON.

The SPS-34-GB-P2-EDFM supports a sophisticated ONU management system, including alarms, provisioning, DHCP and IGMP functions for a stand-alone IPTV solution at the ONU.

The SPS-34-GB-P2-EDFM can be managed from the OLT over the EPON using 802.3ah standard OAM messaging and China OAM extensions.

The SPS-34-GB-P2-EDFM fits seamlessly into existing communications equipment, providing service providers with a smooth upgrade to EPON. The SPS-34-GB-P2-EDFM solution vastly decreases the installation costs of deploying fiber access in MDUs and enables service providers to improve their revenue streams while decreasing OPEX.

## Block Diagram

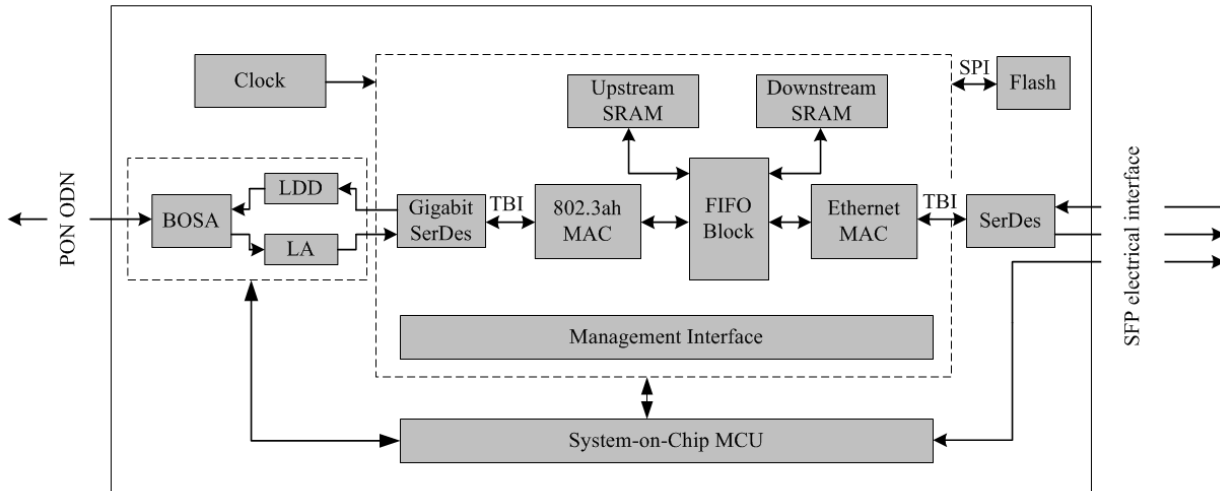


Figure 1, SPS-34-GB-P2-EDFM Block Diagram

## Regulatory Compliance

Table 1 - Absolute Maximum Ratings

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>500 V)
Electrostatic Discharge (ESD) to the SC Receptacle	IEC 61000-4-2	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B)	Compatible with standards
Immunity	IEC 61000-4-3	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class I laser product.
Component Recognition	UL and CSA	Compliant with standards
RoHS	2002/95/EC 4.1&4.2 2005/747/EC	Compliant with standards <sup>note</sup>

Note:

In light of item 5 in Annex of 2002/95/EC, "Pb in the glass of cathode ray tubes, electronic components and fluorescent tubes." and item 13 in Annex of 2005/747/EC, "Lead and cadmium in optical and filter glass.", the two exemptions are being concerned for Source Photonics transceivers, because Source Photonics transceivers use glass, which may contain Pb, for components such as lenses, windows, isolators, and other electronic components.

## Absolute Maximum Ratings

**Table 2 - Absolute Maximum Ratings**

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Ambient Temperature	$T_S$	-40	-	85	°C	
Operating Case Temperature	$T_C$	-30		75	°C	1
Operating Relative Humidity	RH	5		95	%	
Power Supply Voltage	$V_{CC}$	0		4	V	
Input Voltage		GND		$V_{CC}$	V	
Receiver Damaged Threshold		7			dBm	

Note 1: When ambient temperature is above 60°C, airflow at rate higher than 1m/sec is required.

## Recommended Operating Conditions

**Table 3 – Recommended Operating Conditions**

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Power Supply Voltage	$V_{CC}$	3.13	3.3	3.47	V	
Operating Case Temperature	$T_C$	-30		75	°C	
Operating Relative Humidity	RH	5		95	%	
Power Dissipation	$P_D$		2000	2475	mW	
Data Rate			1.25		Gbit/s	
Data Rate Drift		-100		+100	PPM	

## Optical Characteristics

**Table 4 – Optical Characteristics**

Transmitter						
Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Centre Wavelength	$\lambda_C$	1260		1360	nm	
RMS Spectral Width	$\Delta\lambda$			3	nm	
Average Launch Power	$P_{OUT}$	-1		4	dBm	1
Average Launch Power-OFF Transmitter	$P_{OFF}$			-45	dBm	
Extinction Ratio	EX	9			dB	2
Total Jitter	TJ			0.35	UI	2
Rise/Fall Time (20%-80%)	$T_R/T_F$			260	ps	2,3
RIN <sub>15</sub> OMA				-115	dB/Hz	
Optical Return Loss Tolerance				15	dB	

Optical Eye Mask	Compliant With IEEE Std 802.3ah™-2004					2,4
<b>Receiver</b>						
Operating Wavelength	$\lambda_C$	1480		1500	nm	
Sensitivity	$P_{SEN}$			-26	dBm	5
Saturation	$P_{SAT}$	-3			dBm	
Signal-Detected Assert Level	$P_{SDA}$			-27	dBm	6
Signal-Detected Deassert Level	$P_{SDD}$	-39			dBm	7
Signal-Detected Hysteresis	$P_{SDA} - P_{SDD}$	0.5		6	dBm	
Receiver Reflectance				-12	dB	

**Notes:**

1. The optical power is launched into 9/125um SMF.
2. Measured by Ethernet package with random payload.
3. Measured with the Bessel-Thompson filter OFF.
4. Transmitter eye mask definition {0.22UI, 0.375UI, 0.20UI, 0.20UI, 0.30UI}.
5. Measured with Ethernet package with random payload and ER=9dB, BER =  $10^{-12}$ .
6. An increase in optical power above the specified level will cause the Signal Detect output to switch from a low state to a high state.
7. A decrease in optical power below the specified level will cause the Signal Detect output to switch from a high state to a low state.

## Electrical Characteristics


**Table 5 – Electrical Characteristics**

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Supply Current	$I_{CC}$			750	mA	
Tx_Data Input Differential Swing	$V_{IN}$	200		1600	mVp-p	1
Tx_Disable Voltage - Low	$V_{TDIS, L}$	0		0.8	V	2
Tx_Disable Voltage - High	$V_{TDIS, H}$	2.0		$V_{CC}$	V	
Input Differential Impedance	$Z_{IN}$	90	100	110	$\Omega$	
Rx_Data Output Differential Swing	$V_{OUT}$	400		1600	mV <sub>P,P</sub>	3
Rx_Loss of Signal Voltage - Low	$V_{LOS, L}$	0		0.4	V	4
Rx_Loss of Signal Voltage - High	$V_{LOS, H}$	2.4		$V_{CC}$	V	

**Notes:**

1. Compatible with LVPECL input, AC coupled internally.
2. TX Disable (See [Pin Function Definitions](#)).
3. LVPECL output, AC coupled internally, guaranteed in the full range of input optical power (-3dBm to -26dBm).
4. LOS (See [Pin Function Definitions](#)).

## Pin Definitions

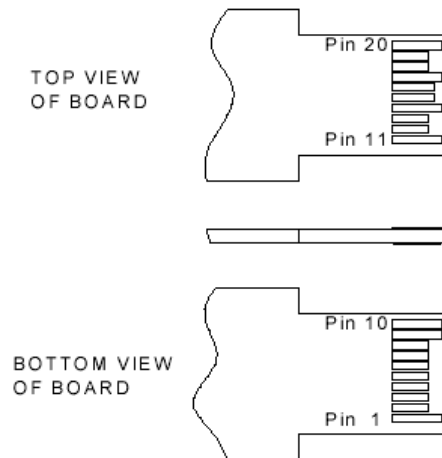

**Figure 2, SFP Pin View (Golden Finger)**

**Table 6 –Pin Function Definitions**


Pin	Name	Description	Notes
1	$V_{ee}T$	Transmitter Ground	
2	TX Fault	Transmitter Fault Indication	1
3	TX Disable	Transmitter Disable	2
4	MOD-DEF2	Module Definition 2	3
5	MOD-DEF1	Module Definition 1	3
6	MOD-DEF0	Module Definition 0	3
7	Dying Gasp	Dying Gasp Indication	4
8	LOS	Loss of Signal	5
9	$V_{ee}R$	Receiver Ground	
10	$V_{ee}R$	Receiver Ground	
11	$V_{ee}R$	Receiver Ground	
12	RD-	Inv. Receiver Data Out	6
13	RD+	Receiver Data Out	
14	$V_{ee}R$	Received Ground	
15	$V_{cc}R$	Receiver Power	7
16	$V_{cc}T$	Transmitter Power	
17	$V_{ee}T$	Transmitter Ground	
18	TD+	Transmit Data In	8
19	TD-	Inv. Transmit Data In	
20	$V_{ee}T$	Transmitter Ground	

**Notes:**

1. TX Fault is an open collector/drain output, which should be pulled up with a 4.7K-10K $\Omega$  resistor on the host board. Pull up voltage between 2.0V and  $V_{cc}T$ , R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.

2. TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7-10 K $\Omega$  resistor. Its states are:
  - Low (0-0.8V): Transmitter on
  - (>0.8, < 2.0V): Undefined
  - High (2.0-3.465V): Transmitter Disabled
  - Open: Transmitter Disabled
3. MOD-DEF0,1,2. These are the module definition pins. They should be pulled up with a 4.7K-10K $\Omega$  resistor on the host board. The pull-up voltage shall be  $V_{ccT}$  or  $V_{ccR}$ .
  - MOD-DEF0 is grounded by the module to indicate that the module is present
  - MOD-DEF1 is the clock line of two-wire serial interface for serial ID
  - MOD-DEF2 is the data line of two-wire serial interface for serial ID
4. Power fail warning. If the SPS-34-GB-P2-EDFM is about to lose power, this function detects the situation and sends a signal to warn the optical line terminal (OLT) about the impending line drop.
5. LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K-10K $\Omega$  resistor. Pull up voltage between 2.0V and  $V_{ccT}$ ,  $R+0.3V$ . When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
6. These are the differential receiver outputs. They are DC coupled 100  $\Omega$  differential lines which should be terminated with 100  $\Omega$  (differential) at the user SERDES.
7.  $V_{ccR}$  and  $V_{ccT}$  are the receiver and transmitter power supplies. They are defined as  $3.3V\pm 5\%$  at the SFP connector pin. Inductors with DC resistance of less than 1 $\Omega$  should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30 mA greater than the steady state value.
8. These are the differential transmitter inputs. They are AC coupled differential lines with 100 $\Omega$  differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

**EEPROM Information**

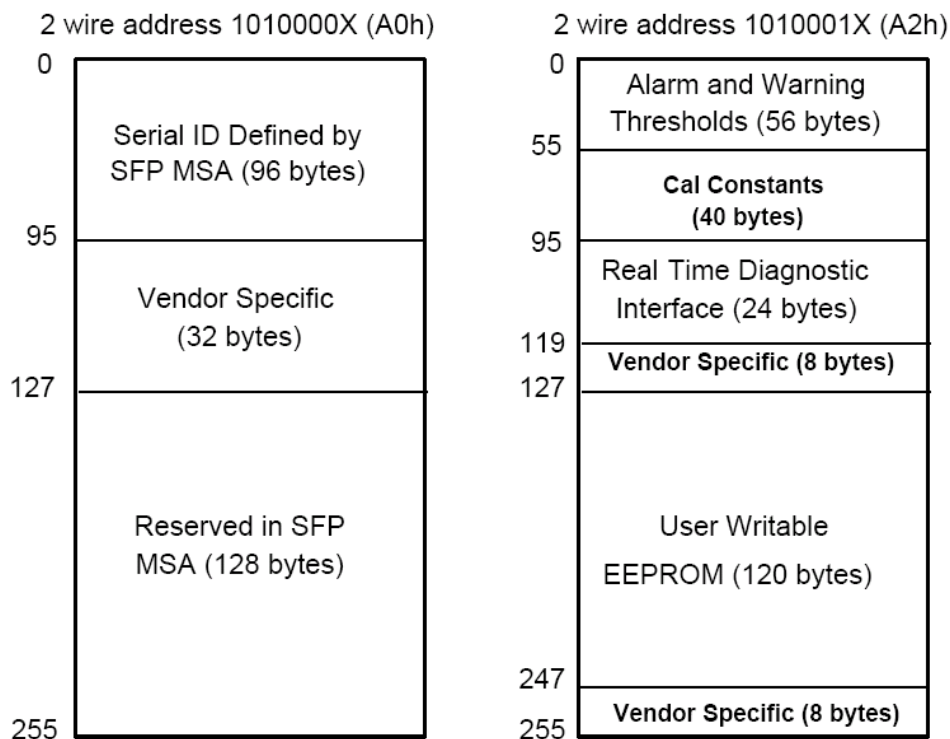

**Figure 3, 2-wire Serial Digital Diagnostic Memory Map**

**Table 7 –EEPROM Serial ID Memory Contents (A0h)**

Addr.	Field Size (Bytes)	Name of Field	Hex	Description
0	1	Identifier	03	SFP transceiver
1	1	Ext. Identifier	04	MOD4
2	1	Connector	01	SC
3-10	8	Transceiver	00 00 00 80 00 00 00 00	BASE-PX
11	1	Encoding	01	8B10B
12	1	BR, Nominal	0D	1.25Gbps
13	1	Reserved	00	
14	1	Length (9um)-km	14	20(km)
15	1	Length (9um)	C8	200(100m)
16	1	Length (50um)	00	Not Support MMF
17	1	Length (62.5um)	00	Not Support MMF
18	1	Length (Copper)	00	Not Support Copper
19	1	Reserved	00	
20-35	16	Vendor name	53 4F 55 52 43 45 50 48 4F 54 4F 4E 49 43 53 20	“SOURCEPHOTONICS”(ASC II)
36	1	Reserved	00	
37-39	3	Vendor OUI	00 00 00	

40-55	16	Vendor PN	53 50 53 33 34 47 42 50 32 45 44 46 4D 20 20 20	“SPS34GBP2EDFM” (ASCII)
56-59	4	Vendor Rev	xx xx 20 20	ASCII(“31 30 20 20” means 1.0 Revision)
60-61	2	Wavelength	05 1E	1310nm Laser Wavelength
62	1	Reserved	00	
63	1	CC_BASE	xx	Check sum of byte 0-62
64-65	2	Options	00 1A	LOS, LAS_FAIL and TX_DISABLE
66	1	BR, max	00	
67	1	BR, min	00	
68-83	16	Vendor SN	xx xx xx xx xx xx xx xx xx xx xx xx xx xx xx xx	ASCII
84-91	8	Date code	xx xx xx xx xx xx 20 20	Year(2 bytes),Month(2 bytes), Day(2 bytes)
92	1	Diagnostic Monitoring Type	68	Compliant with SFF-8472 V9.5 Internally Calibrated Received power measurement type -Average Power
93	1	Enhanced Options	F0	Diagnostics (Optional Alarm/warning flags) Soft TX_DISABLE control and monitoring implemented Soft TX_FAULT monitoring implemented Soft RX_LOS monitoring implemented
94	1	SFF-8472 Compliance	02	Diagnostics Compliance(SFF-8472 V9.5)
95	1	CC_EXT	xx	Check sum of byte 64-94
96	1	Vendor Specific		
97	1	Vendor Specific		
98	1	Vendor Specific		
99	1	Vendor Specific		
100	1	Vendor Specific		
101	1	Vendor Specific		
102	1	Vendor Specific		
103	1	Vendor Specific		
104-113	10	Vendor Specific		
114-115	2	Vendor Specific		
116	1	Vendor Specific		
117-126	10	Vendor Specific		
127	1	Vendor Specific		
128-255	128	Vendor Specific		



Note: The “xx” byte should be filled in according to practical case. For more information, please refer to the related document of SFF-8472 Rev 9.5.

**Table 8 – Digital Diagnostic Specification (A2h)**

Data Address	Parameter	Range	Accuracy
96-97	Temperature	-30 to 110°C	±3°C
98-99	Vcc Voltage	2.8V to 3.8V	±3%
100-101	Bias Current	0 to 60mA(Note)	±10%
102-103	TX Power	-2 to 4dBm	±3dB
104-105	RX Power	-27 to -2dBm	±2dB


Note: Only for continuous mode

**Table 9 – MAC Communication (A2h)**

Addr.	Field Size (Bytes)	Name of Field	Hex	Description
128	1	Command	01	Reset MAC
			02	Get MAC Registered Information
			03	Force open laser when un-registered
			04	Force close laser when un-registered
			05	Force close laser when registered
			06	Restore laser state when registered
129	1	Command Execute Status	11	Command is executing
			12	Command execute fail
			55	Command execute success
130-175	46	Command Execute Result(Only valid when command execute success)	xx...xx	For command "Get TK3715 Registered Information", will return ASCII "Registered" or "LOS"
			00...00	Unused for other commands

Note : Before starting communication with MAC, Offset 127 of A2 address must be write 0x05; After communication with MAC, Offset 127 of A2 address should be write to 0x00.

**Mechanical Diagram**

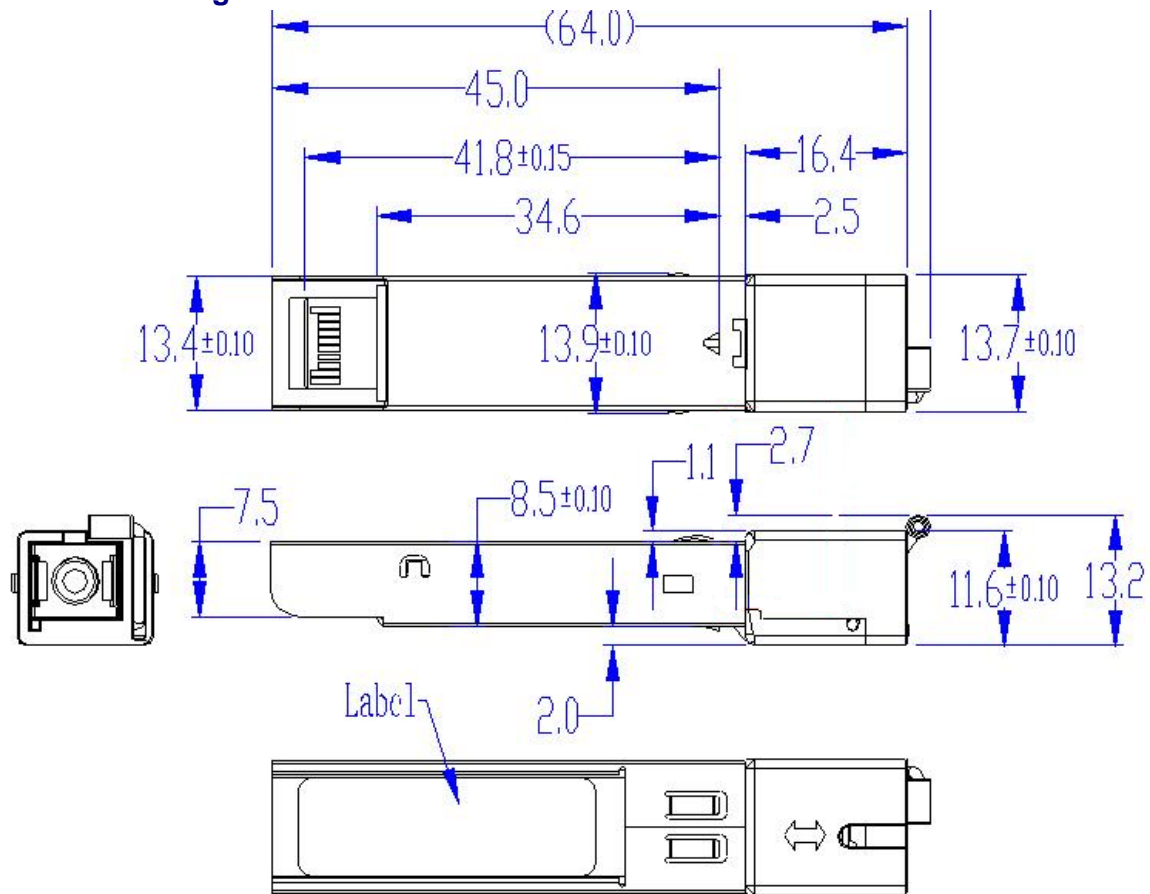

**Figure 4 Mechanical Diagram**

**Order Information**

**Table 10 – Order Information**

Part No.	Application	Data Rate	Fiber Type
SPS-34-GB-P2-EDFM	1000BASE-PX20 ONU	1.25Gb/s symmetric	SMF

## Warnings

**Handling Precautions:** This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

**Laser Safety:** Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

## Legal Notice

### IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at Source Photonics' sole and absolute discretion. Source Photonics warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and Source Photonics expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

Source Photonics assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and Source Photonics makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. Source Photonics customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify Source Photonics for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that Source Photonics is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact Source Photonics to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

## Contact

### U.S.A. Headquarters

20550 Nordhoff Street  
Chatsworth, CA 91311  
USA

Tel: +1-818-773-9044

Fax: +1-818-773-0261

[sales@sourcephotonics.com](mailto:sales@sourcephotonics.com)

### China

Building #2&5, West Export Processing Zone  
No. 8 Kexin Road, Hi-Tech Zone  
Chengdu, 611731, China

Tel: +86-28-8795-8788

Fax: +86-28-8795-8789

[sales@sourcephotonics.com.cn](mailto:sales@sourcephotonics.com.cn)

### Taiwan

9F, No 81, Shui Lee Rd.  
Hsinchu, 300, Taiwan  
R.O.C.

Tel: +886-3-5169222

Fax: +886-3-5169213

[sales@sourcephotonics.com.tw](mailto:sales@sourcephotonics.com.tw)

© Copyright Source Photonics, Inc. 2007~2010

All rights reserved