


**Si-PIN-Fotodiode mit Tageslichtsperrfilter; in SMT und als Reverse Gullwing
Silicon PIN Photodiode with Daylight Filter; in SMT and as Reverse Gullwing
Lead (Pb) Free Product - RoHS Compliant**


BPW 34 F, BPW 34 FS, BPW 34 FSR



BPW 34 F

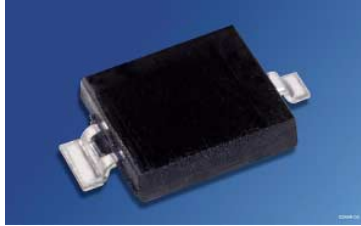

BPW 34 FS

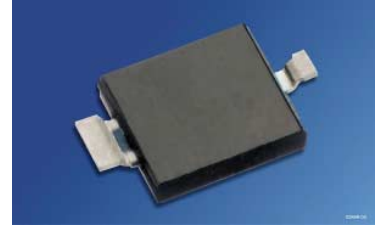

BPW 34 FSR

Wesentliche Merkmale

- Speziell geeignet für den Wellenlängenbereich von 780 nm bis 1100 nm
- Kurze Schaltzeit (typ. 20 ns)
- DIL-Plastikbauform mit hoher Packungsdichte
- BPW 34 FS / FSR: geeignet für Reflow Löten

Anwendungen

- Automotomobil (z.B. Regensensor, Headset)
- IR-Fernsteuerung von Fernseh- und Rundfunkgeräten, Videorecordern, Gerätefernsteuerung
- Lichtschranken

Features

- Especially suitable for the wavelength range of 780 nm to 1100 nm
- Short switching time (typ. 20 ns)
- DIL plastic package with high packing density
- BPW 34 FS / FSR: suitable for reflow soldering

Applications

- Automotive (eg rain sensor, headset)
- IR-remote control of hi-fi and TV sets, video tape recorders, remote controls of various equipment
- Photointerrupters

| Typ Type | Bestellnummer Ordering Code | Fotostrom, $E_e=1 \text{ mW/cm}^2$, $V_R = 5 \text{ V}$, $\lambda = 950 \text{ nm}$ Photocurrent $I_p (\mu\text{A})$ |
|-------------|--------------------------------|--|
| BPW 34 F | Q62702P0929 | 50 (≥ 40) |
| BPW 34 FS | Q65110A2700 | 50 (≥ 40) |
| BPW 34 FSR | Q65110A2740 | 50 (≥ 40) |

Grenzwerte
Maximum Ratings

| Bezeichnung Parameter | Symbol Symbol | Wert Value | Einheit Unit |
|--|------------------------------------|----------------|-----------------|
| Betriebs- und Lagertemperatur Operating and storage temperature range | $T_{op}; T_{stg}$ | - 40 ... + 100 | °C |
| Sperrspannung Reverse voltage | V_R $V_R (t < 2 \text{ min})$ | 16 32 | V V |
| Verlustleistung, $T_A = 25 \text{ °C}$ Total power dissipation | P_{tot} | 150 | mW |

Kennwerte ($T_A = 25 \text{ °C}$, $\lambda = 950 \text{ nm}$)
Characteristics


| Bezeichnung Parameter | Symbol Symbol | Wert Value | Einheit Unit |
|--|------------------------------|--------------------|------------------------------|
| Fotostrom Photocurrent $V_R = 5 \text{ V}$, $E_e = 1 \text{ mW/cm}^2$ | I_p | 50 (≥ 40) | μA |
| Wellenlänge der max. Fotoempfindlichkeit Wavelength of max. sensitivity | $\lambda_{S \text{ max}}$ | 950 | nm |
| Spektraler Bereich der Fotoempfindlichkeit $S = 10\%$ von S_{max} Spectral range of sensitivity $S = 10\%$ of S_{max} | λ | 780 ... 1100 | nm |
| Bestrahlungsempfindliche Fläche Radiant sensitive area | A | 7.00 | mm^2 |
| Abmessung der bestrahlungsempfindlichen Fläche Dimensions of radiant sensitive area | $L \times B$ $L \times W$ | 2.65×2.65 | $\text{mm} \times \text{mm}$ |
| Halbwinkel Half angle | φ | ± 60 | Grad deg. |
| Dunkelstrom, $V_R = 10 \text{ V}$ Dark current | I_R | 2 (≤ 30) | nA |
| Spektrale Fotoempfindlichkeit Spectral sensitivity | S_λ | 0.59 | A/W |
| Quantenausbeute Quantum yield | η | 0.77 | <u>Electrons</u> Photon |
| Leerlaufspannung, $E_e = 0.5 \text{ mW/cm}$ Open-circuit voltage | V_O | 330 (≥ 275) | mV |

Kennwerte ($T_A = 25\text{ °C}$, $\lambda = 950\text{ nm}$)
Characteristics (cont'd)


| Bezeichnung Parameter | Symbol Symbol | Wert Value | Einheit Unit |
|--|------------------|-----------------------|--|
| Kurzschlussstrom, $E_e = 0.5\text{ mW/cm}^2$ Short-circuit current | I_{SC} | 25 | μA |
| Anstiegs- und Abfallzeit des Fotostromes Rise and fall time of the photocurrent $R_L = 50\ \Omega$; $V_R = 5\text{ V}$; $\lambda = 850\text{ nm}$; $I_p = 800\ \mu\text{A}$ | t_r, t_f | 20 | ns |
| Durchlassspannung, $I_F = 100\text{ mA}$, $E = 0$ Forward voltage | V_F | 1.3 | V |
| Kapazität, $V_R = 0\text{ V}$, $f = 1\text{ MHz}$, $E = 0$ Capacitance | C_0 | 72 | pF |
| Temperaturkoeffizient von V_O Temperature coefficient of V_O | TC_V | - 2.6 | mV/K |
| Temperaturkoeffizient von I_{SC} Temperature coefficient of I_{SC} | TC_I | 0.18 | %/K |
| Rauschäquivalente Strahlungsleistung Noise equivalent power $V_R = 10\text{ V}$ | NEP | 4.3×10^{-14} | $\frac{\text{W}}{\sqrt{\text{Hz}}}$ |
| Nachweisgrenze, $V_R = 10\text{ V}$ Detection limit | D^* | 6.2×10^{12} | $\frac{\text{cm} \times \sqrt{\text{Hz}}}{\text{W}}$ |

Relative Spectral Sensitivity

$S_{rel} = f(\lambda)$

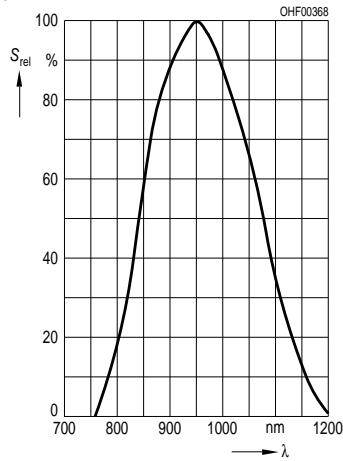


**Photocurrent $I_P = f(E_e)$, $V_R = 5 V$
Open-Circuit Voltage $V_O = f(E_e)$**

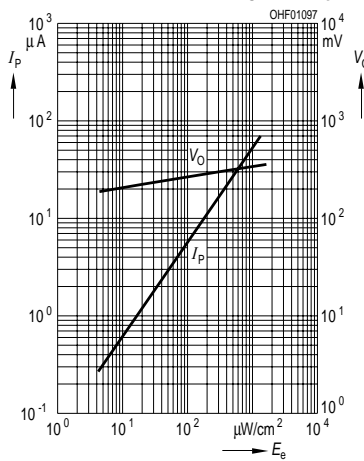


Total Power Dissipation

$P_{tot} = f(T_A)$

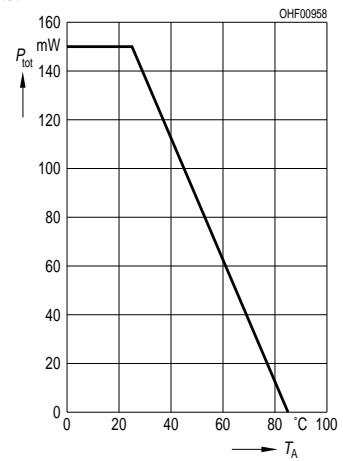


Dark Current

$I_R = f(V_R), E = 0$

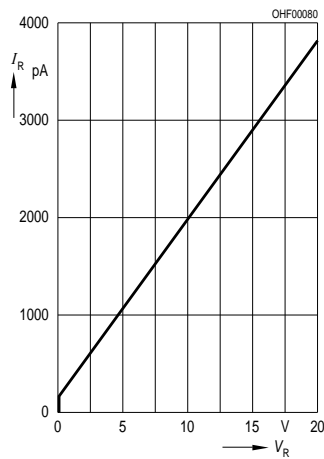


Capacitance

$C = f(V_R), f = 1 MHz, E = 0$

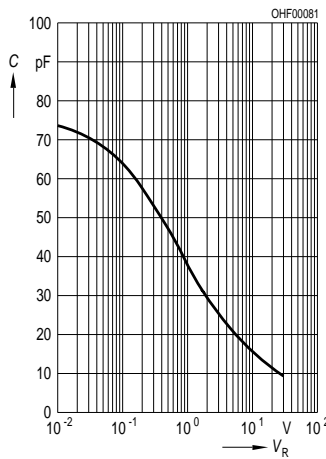


Dark Current

$I_R = f(T_A), V_R = 10 V, E = 0$


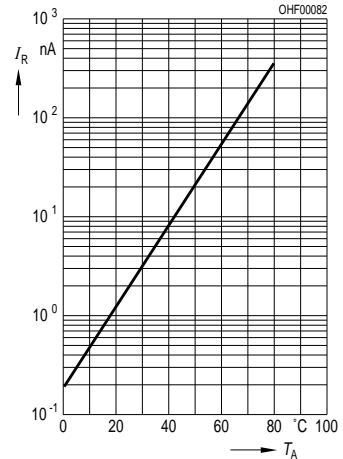


Directional Characteristics

$S_{rel} = f(\phi)$

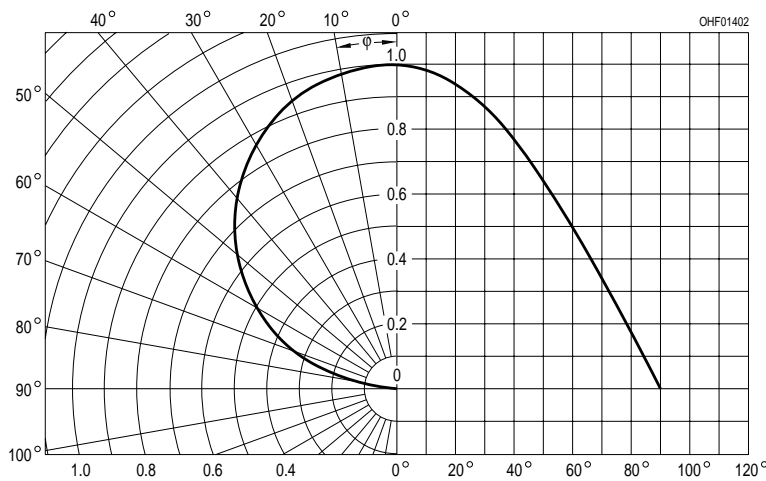


Maßzeichnung
Package Outlines

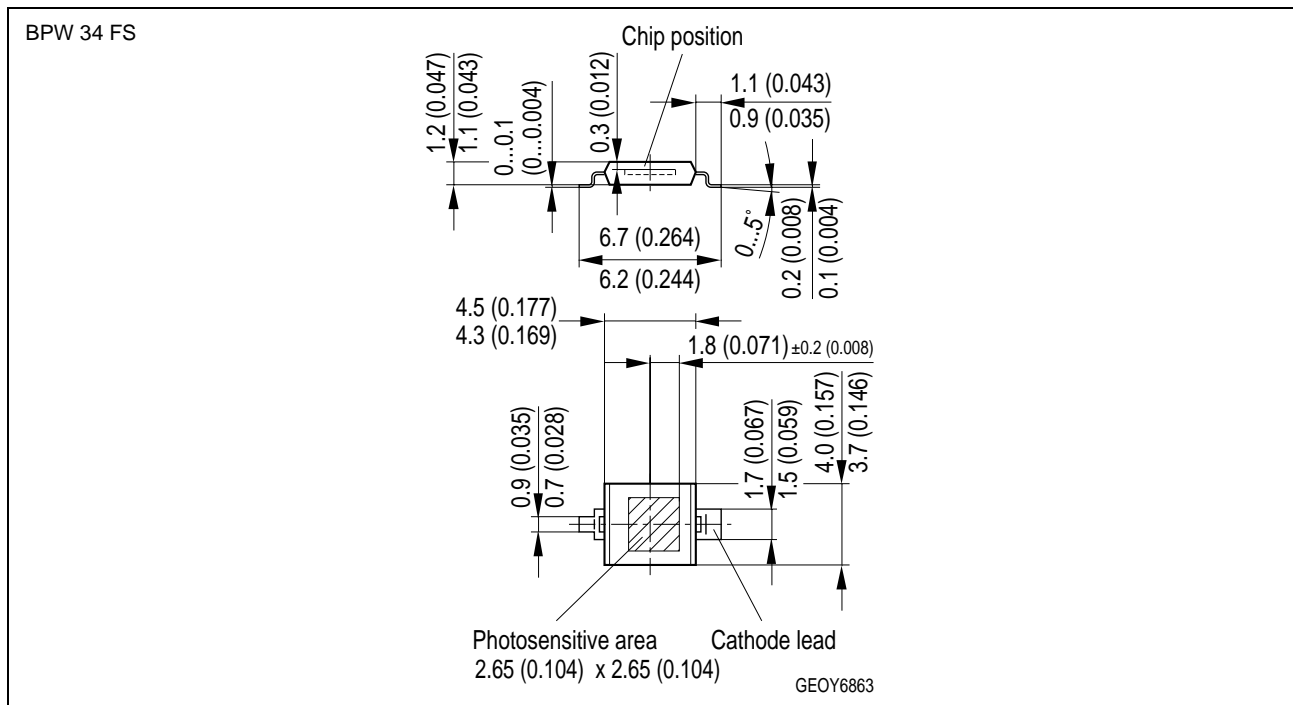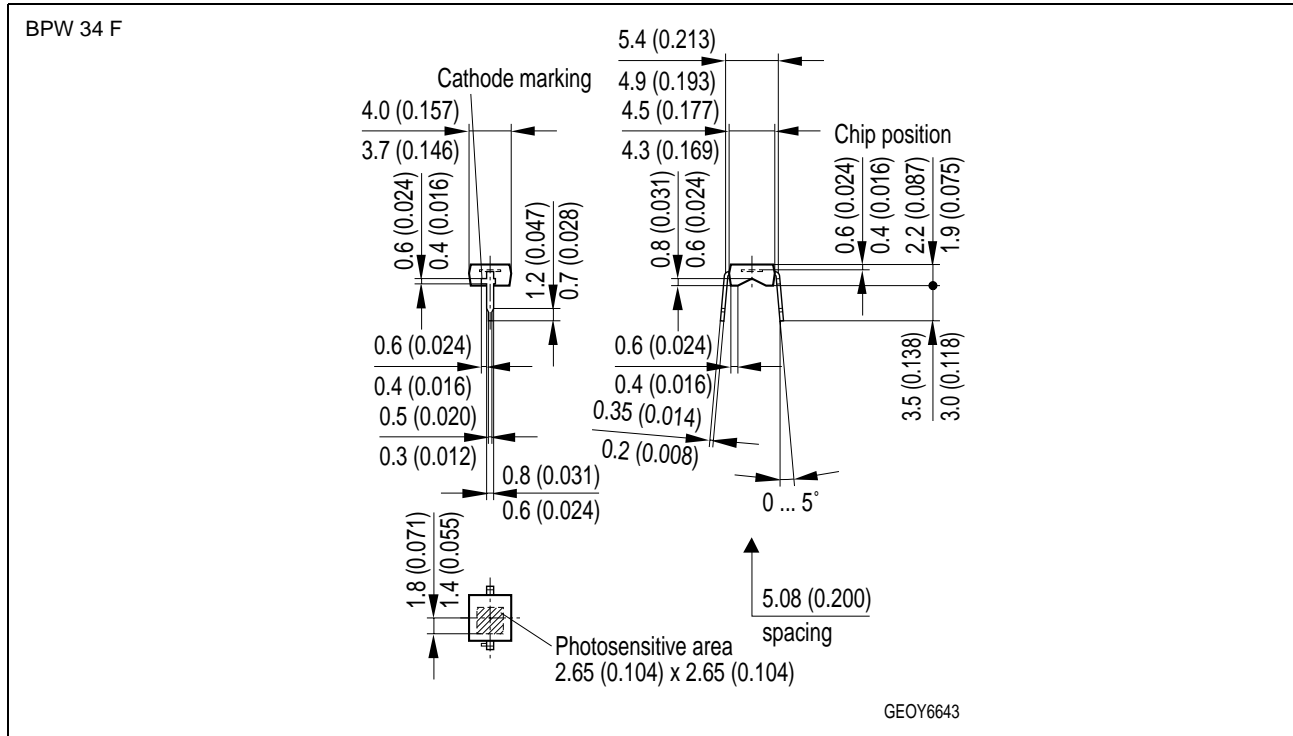

Maße in mm (inch) / Dimensions in mm (inch).

BPW 34 FSR

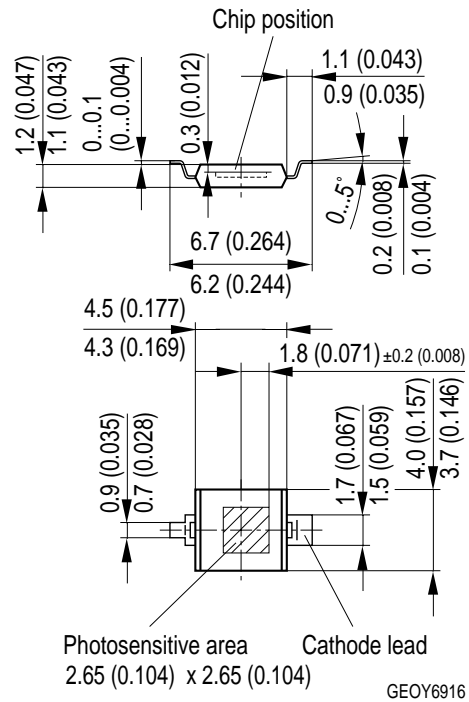

Maße in mm (inch) / Dimensions in mm (inch).


Lötbedingungen
Soldering Conditions

BPW 34 FS
BPW 34 FSR

Vorbehandlung nach JEDEC Level 4
 Preconditioning acc. to JEDEC Level 4

Reflow Lötprofil für bleifreies Lötén
Reflow Soldering Profile for lead free soldering


(nach J-STD-020C)
 (acc. to J-STD-020C)

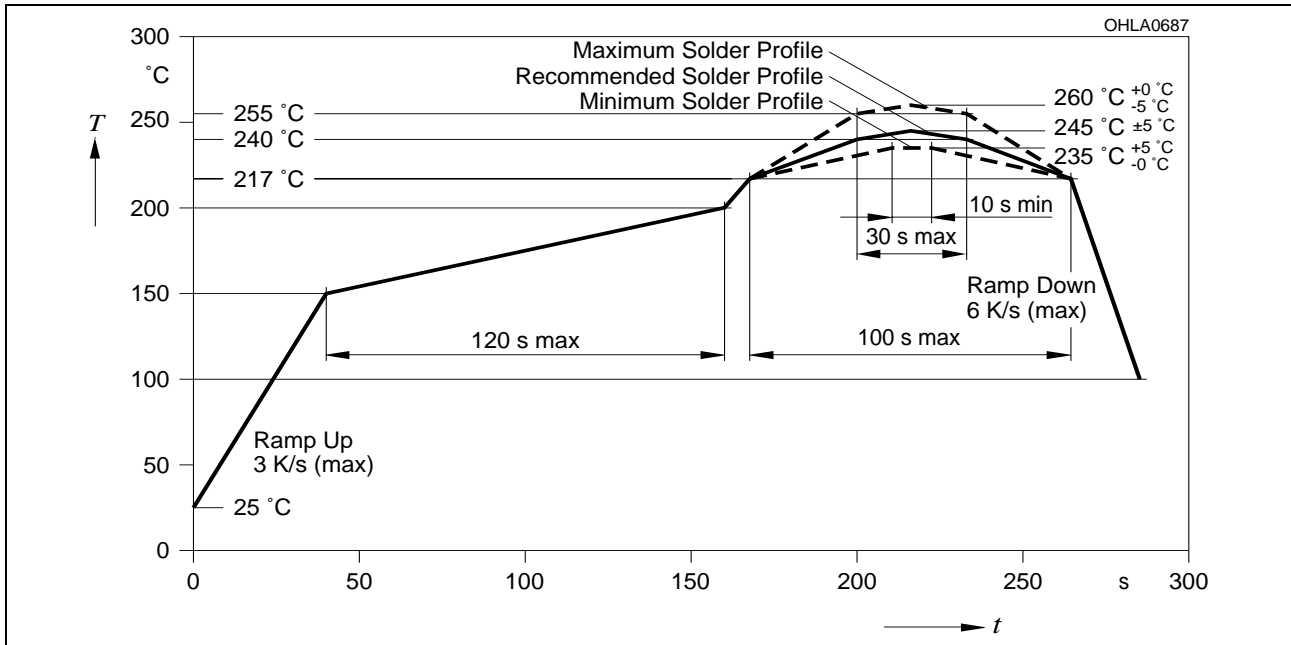

Wellenlötén (TTW)
TTW Soldering

BPW 34 F

(nach CECC 00802)
 (acc. to CECC 00802)

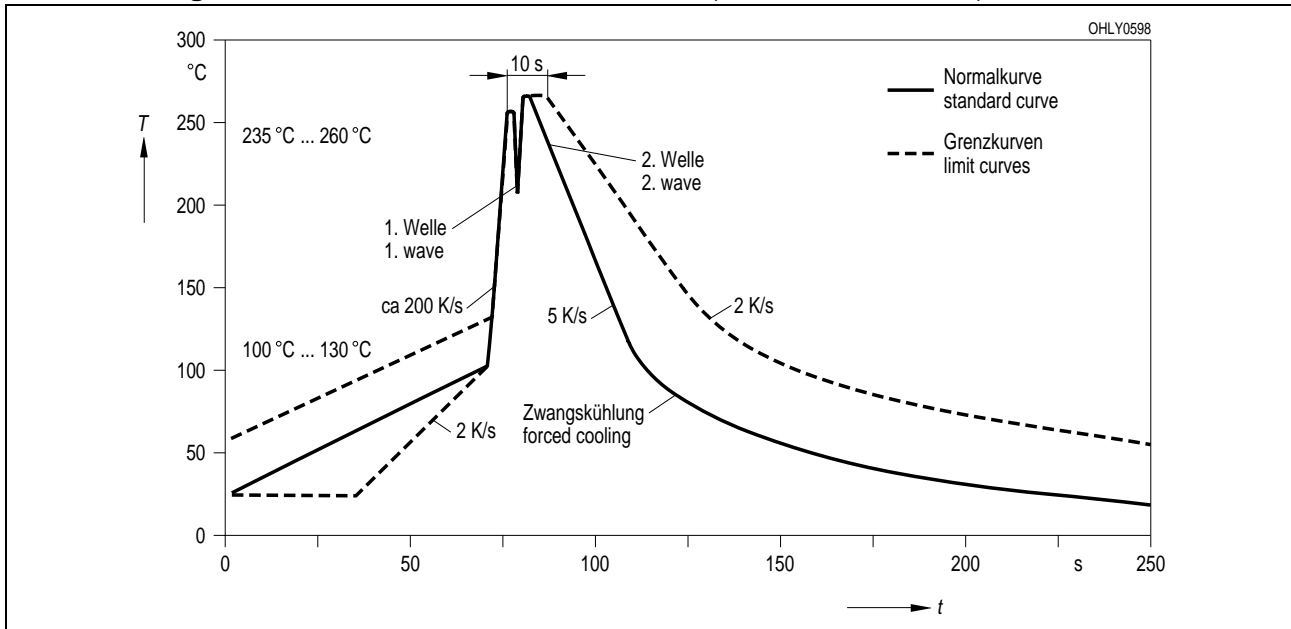

Published by
OSRAM Opto Semiconductors GmbH
Wernerwerkstrasse 2, D-93049 Regensburg
www.osram-os.com
© All Rights Reserved.

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components¹, may only be used in life-support devices or systems² with the express written approval of OSRAM OS.

¹ A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

² Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；

按照中国的相关法规和标准，不含有毒有害物质或元素。