TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

TC7WG17FU,TC7WG17FK

Triple Schmitt Buffer

Features

• High-level output current: $I_{OH}/I_{OL} = \pm 8 \text{ mA (min)}$

at $V_{CC} = 3 V$

• High-speed operation: t_{pd} = 4.0 ns (typ.)


at $V_{CC} = 3.3 \text{ V}, 15 \text{pF}$


Operating voltage range: V_{CC} = 0.9~3.6 V

• 5.5-V tolerant inputs

• 3.6-V power down protection outputs

Marking






Weight

SSOP8-P-0.65 : 0.02 g (typ.) SSOP8-P-0.50A : 0.01 g (typ.)

Absolute Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Value	Unit
Power supply voltage	V _{CC}	-0.5~4.6	V
DC input voltage	V _{IN}	-0.5~7.0	V
DC output voltage	V _{OUT}	-0.5~ 4.6 (Note 1)	V
		-0.5~V _{CC} + 0.5 (Note 2)	V
Input diode current	I _{IK}	-20	mA
Output diode current	lok	-20 (Note 3)	mA
DC output current	lout	±25	mA
DC V _{CC} / ground current	Icc	±50	mA
Power dissipation	PD	300 (SM8) 200 (US8)	mW
Storage temperature	T _{stg}	-65~150	°C

Pin Assignment (top view)



Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: $V_{CC} = 0V$

Note 2: High or Low State. IOUT absolute maximum rating must be observed.

Note 3: Vout < GND

2007-11-01



IEC Logic Symbol

1A — (1) — (7) 1Y 2A — (3) — (5) 2Y 3A — (6) — (2) 3Y

Truth Table

Α	Υ
L	L
Н	Н

Operating Ranges

Characteristics	Symbol	Value	Unit	
Power supply voltage	V _{CC}	0.9~3.6	V	
Input voltage	V _{IN}	0~5.5	V	
Output voltage	V	0~3.6 (Note 4)	V	
	Vout	0~V _{CC} (Note 5)	\ \ \	
Output Current	I _{OH} /I _{OL}	±8.0 (Note 6)		
		±4.0 (Note 7)		
		±3.0 (Note 8)	A	
		±1.7 (Note 9)	mA	
		±0.3 (Note 10)		
		±0.02 (Note 11)		
Operating temperature	T _{opr}	-40~85	°C	

Note 4: $V_{CC} = 0V$

Note 5: High or Low state.

Note 6: $V_{CC} = 3.0 \sim 3.6 \text{ V}$

Note 7: $V_{CC} = 2.3 \sim 2.7 \text{ V}$

Note 8: $V_{CC} = 1.65 \sim 1.95 \text{ V}$

Note 9: V_{CC} = 1.4~1.6 V

Note 10: $V_{CC} = 1.1 \sim 1.3 \text{ V}$

Note 11: $V_{CC} = 0.9 \text{ V}$

2



Electrical Characteristics

DC Electrical Characteristics

Characteristics Sy		Symbol	Symbol Test Condition		Ta = 25°C				Ta = -40~85°C		Unit
		Syllibol			V _{CC} (V)	Min	Тур.	Max	Min	Max	Unit
					0.9	_	_	0.73	_	0.80	
High level					_	_	0.86	_	0.93		
	VP	_		1.4	_	_	1.07	_	1.12		
				1.65	_	_	1.23	_	1.25		
				2.3	_	_	1.66	_	1.68		
				3.0	_	_	2.14	_	2.15		
Threshold voltage					0.9	0.18	_	_	0.07	_	V
					1.1	0.26	_	_	0.18	_	
		.,			1.4	0.36	_	_	0.31	_	
	Low level	V _N		_	1.65	0.45	_	_	0.41	_	
					2.3	0.69	_	_	0.64	_	1
					3.0	0.96	_	_	0.91	_	
					0.9	0.20	_	0.38	0.15	0.53	v
					1.1	0.25	_	0.41	0.21	0.53	
l., , , , ,		.,				0.35	_	0.48	0.34	0.57	
Hysteresis voltage		V _H	_		1.65	0.42	_	0.56	0.40	0.60	
					2.3	0.60	_	0.74	0.61	0.76	
					3.0	0.79	_	0.93	0.80	0.94	
				I _{OH} =-0.02 mA	0.9	0.75	_	_	0.75	_	
				$I_{OH} = -0.3 \text{ mA}$	1.1~1.3	V _{CC} × 0.75	_	_	V _{CC} × 0.75	_	
	High level	l Voh	VIN = VIH	$I_{OH} = -1.7 \text{ mA}$	1.4~1.6	V _{CC} × 0.75		_	V _{CC} × 0.75		
				$I_{OH} = -3.0 \text{ mA}$	1.65~ 1.95	V _{CC} -0.45	_	_	V _{CC} -0.45	_	
				$I_{OH} = -4.0 \text{ mA}$	2.3~2.7	2.0	_	_	2.0	_	
Output voltage				$I_{OH} = -8.0 \text{ mA}$	3.0~3.6	2.48	_	_	2.48	_	V
		.ow level V _{OL}		$I_{OL} = 0.02 \text{ mA}$	0.9	_	_	0.1	_	0.1	·
				I _{OL} = 0.3 mA	1.1~1.3	_	_	V _{CC} × 0.25	_	V _{CC} × 0.25	
Low	Low level			I _{OL} = 1.7 mA	1.4~1.6	_	_	V _{CC} × 0.25	_	V _{CC} × 0.25	
				I _{OL} = 3.0 mA	1.65~ 1.95	_	_	0.45	_	0.45	
				$I_{OL} = 4.0 \text{ mA}$	2.3~2.7	_	_	0.4	_	0.4	
				$I_{OL} = 8.0 \text{ mA}$	3.0~3.6	_	_	0.4	_	0.4	
Input leakage curre	ent	I _{IN}	V _{IN} = 0~5.5V		0~3.6	_	_	±0.1	_	±1.0	μΑ
Power off leakage current		l _{OFF}	V _{IN} = 0~5 V _{OUT} = 0	V _{IN} = 0~5.5V V _{OUT} = 0~3.6V		_	_	1.0	_	10.0	μА
Quiescent supply current I		Icc	$V_{IN} = V_{CC}$	V _{IN} = V _{CC} or GND		—	_	1.0	—	10.0	μΑ



AC Electrical Characteristics (input $t_r = t_f = 3 \text{ ns}$)

Characteristics	Symbol	Test Condition		Ta = 25°C		Ta = -40~85°C		Unit	
Characteristics	Cymbol	Test Condition	V _{CC} (V)	Min	Тур.	Max	Min	Max	Offic
Propagation delay time		C_L = 10 pF, R_L = 1 M Ω	0.9	_	41.3	_	_	_	
			1.1~1.3	_	18.0	25.4	1.0	40.8	
			1.4~1.6	_	9.5	12.2	1.0	13.5	ns
			1.65~ 1.95		7.0	8.7	1.0	9.3	
			2.3~2.7	_	4.7	5.7	1.0	6.2	
			3.0~3.6	_	3.7	4.5	1.0	4.7	
	^t pLH ^t pHL	C_L = 15 pF, R_L = 1 M Ω	0.9	_	44.4	_	_	_	
			1.1~1.3	_	19.3	27.7	1.0	46.9	
			1.4~1.6	_	10.2	13.1	1.0	14.7	
			1.65~ 1.95	_	7.5	9.3	1.0	9.9	
			2.3~2.7	_	5.0	5.9	1.0	6.4	
			3.0~3.6		4.0	4.8	1.0	5.2	
		$C_L = 30 \text{ pF},$ $R_L = 1 \text{ M}\Omega$	0.9	_	55.8	_	_	_	
			1.1~1.3	_	24.7	36.3	1.0	59.6	
			1.4~1.6	_	12.9	16.8	1.0	19.2	
			1.65~ 1.95	_	9.2	11.5	1.0	12.9	
			2.3~2.7	_	5.9	7.1	1.0	8.3	
			3.0~3.6	_	4.9	5.7	1.0	6.6	
Input capacitance	C _{IN}	_	3.6	_	3	_	_	_	pF
Power dissipation capacitance	C _{PD}	(Note 12)	0.9 ~ 3.6	_	11	_	_	_	pF

Note 12: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.


4


Average operating current can be obtained by the equation:

 $I_{CC (opr.)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/3$

Package Dimensions


SSOP8-P-0.65 Unit: mm





Weight: 0.02 g (typ.)

Package Dimensions

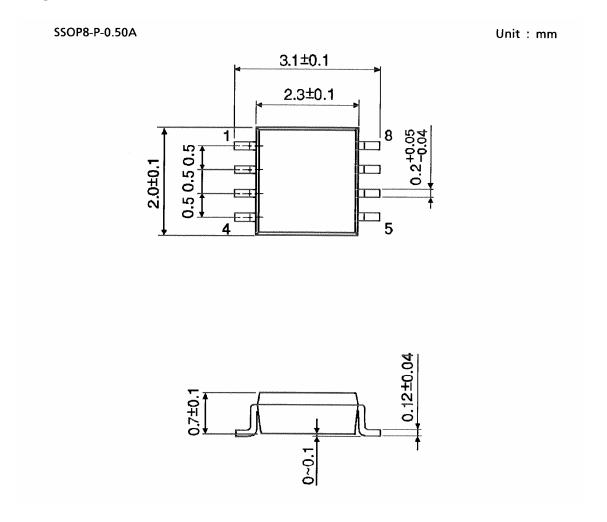

Weight: 0.01 g (typ.)

RESTRICTIONS ON PRODUCT USE

20070701-EN GENERAL

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which
 manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No
 responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
 may result from its use. No license is granted by implication or otherwise under any patents or other rights of
 TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS
 compatibility. Please use these products in this document in compliance with all applicable laws and regulations
 that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses
 occurring as a result of noncompliance with applicable laws and regulations.

2007-11-01