


# TC7W241FU

## NON-INVERTED, 3-STATE OUTPUTS

The TC7W241FU is a high speed C<sup>2</sup>MOS DUAL BUS BUFFERS fabricated with silicon gate C<sup>2</sup>MOS technology. It achieve the high speed operation similar to equivalent LSTTL while maintaining the C<sup>2</sup>MOS low power dissipation.

It is a non-inverting 3-state buffer has one active-high and one active-low output enable.

All inputs are equipped with protection circuits against static discharge or transient excess voltage.

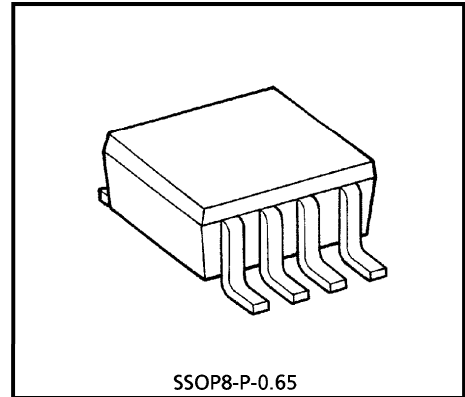

SSOP8-P-0.65  
Weight : 0.02g (Typ.)


### FEATURES

- High Speed .....  $t_{pd} = 10\text{ns}$  (Typ.) at  $V_{CC} = 5\text{V}$
- Low Power Dissipation .....  $I_{CC} = 2\mu\text{A}$  (Max.) at  $T_a = 25^\circ\text{C}$
- High Noise Immunity .....  $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (Min.)
- Output Drive Capability ..... 15 LSTTL Loads
- Symmetrical Output Impedance...  $|I_{OH}| = I_{OL} = 6\text{mA}$  (Min.)
- Balanced Propagation Delays .....  $t_{pLH} \cong t_{pHL}$
- Wide Operating Voltage Range...  $V_{CC}(\text{opr}) = 2\sim 6\text{V}$


### MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage Range	$V_{CC}$	- 0.5~7	V
DC Input Voltage	$V_{IN}$	- 0.5~ $V_{CC} + 0.5$	V
DC Output Voltage	$V_{OUT}$	- 0.5~ $V_{CC} + 0.5$	V
Input Diode Current	$I_{IK}$	$\pm 20$	mA
Output Diode Current	$I_{OK}$	$\pm 20$	mA
DC Output Current	$I_{OUT}$	$\pm 35$	mA
DC $V_{CC}$ /Ground Current	$I_{CC}$	$\pm 37.5$	mA
Power Dissipation	$P_D$	300	mW
Storage Temperature	$T_{stg}$	- 65~150	$^\circ\text{C}$
Lead Temperature (10s)	$T_L$	260	$^\circ\text{C}$


### MARKING



### PIN ASSIGNMENT (TOP VIEW)



LOGIC DIAGRAM



TRUTH TABLE

INPUT			OUTPUT
$\bar{G}$	G	A	Y
L	H	L	L
L	H	H	H
H	L	X	Z

X : Don't Care  
Z : High Impedance

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	$V_{CC}$	2~6	V
Input Voltage	$V_{IN}$	0~ $V_{CC}$	V
Output Voltage	$V_{OUT}$	0~ $V_{CC}$	V
Operating Temperature	$T_{opr}$	-40~85	°C
Input Rise and Fall Time	$t_r, t_f$	0~1000 ( $V_{CC} = 2.0V$ ) 0~500 ( $V_{CC} = 4.5V$ ) 0~400 ( $V_{CC} = 6.0V$ )	ns

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CIR-CUIT	TEST CONDITION	$V_{CC}$	$T_a = 25^\circ C$			$T_a = -40 \sim 85^\circ C$		UNIT	
					MIN.	TYP.	MAX.	MIN.	MAX.		
High-Level Input Voltage	$V_{IH}$	—	—	2.0	1.5	—	—	1.5	—	V	
				4.5	3.15	—	—	3.15	—		
				6.0	4.2	—	—	4.2	—		
Low-Level Input Voltage	$V_{IL}$	—	—	2.0	—	—	0.5	—	0.5	V	
				4.5	—	—	1.35	—	1.35		
				6.0	—	—	1.8	—	1.8		
High-Level Output Voltage	$V_{OH}$	—	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OH} = -20\mu A$	2.0	1.9	2.0	—	1.9	—	V
				$I_{OH} = -6mA$	4.5	4.4	4.5	—	4.4	—	
				$I_{OH} = -7.8mA$	6.0	5.9	6.0	—	5.9	—	
Low-Level Output Voltage	$V_{OL}$	—	$V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OL} = 20\mu A$	2.0	—	0.0	0.1	—	0.1	V
				$I_{OL} = 6mA$	4.5	—	0.0	0.1	—	0.1	
				$I_{OL} = 7.8mA$	6.0	—	0.0	0.1	—	0.1	
3-State Output Off-State Current	$I_{OZ}$	—	$V_{IN} = V_{IH}$ or $V_{IL}$ $V_{OUT} = V_{CC}$ or GND	6.0	—	—	$\pm 0.5$	—	$\pm 5.0$	$\mu A$	
Input Leakage Current	$I_{IN}$	—	$V_{IN} = V_{CC}$ or GND	6.0	—	—	$\pm 0.1$	—	$\pm 1.0$		
Quiescent Supply Current	$I_{CC}$	—	$V_{IN} = V_{CC}$ or GND	6.0	—	—	2.0	—	20.0		

AC ELECTRICAL CHARACTERISTICS (Input  $t_r = t_f = 6\text{ns}$ )

PARAMETER	SYMBOL	TEST CIRCUIT	TEST CONDITION	Ta = 25°C			Ta = -40~85°C		UNIT		
				C <sub>L</sub>	V <sub>CC</sub>	MIN.	TYP.	MAX.		MIN.	MAX.
Output Transition Time	t <sub>TLH</sub> t <sub>THL</sub>	—	—	50	2.0	—	25	60	—	75	ns
					4.5	—	7	12	—	15	
					6.0	—	6	10	—	13	
Propagation Delay Time	t <sub>PLH</sub> t <sub>pHL</sub>	—	—	50	2.0	—	36	90	—	115	
					4.5	—	12	18	—	23	
					6.0	—	10	15	—	20	
				150	2.0	—	51	130	—	165	
					4.5	—	17	26	—	33	
					6.0	—	14	22	—	28	
Output Enable Time	t <sub>pZL</sub> t <sub>pZH</sub>	—	R <sub>L</sub> = 1kΩ	50	2.0	—	48	125	—	155	
					4.5	—	16	25	—	31	
					6.0	—	14	21	—	26	
				150	2.0	—	63	165	—	205	
					4.5	—	21	33	—	41	
					6.0	—	18	28	—	35	
Output Disable Time	t <sub>pLZ</sub> t <sub>pHZ</sub>	—	R <sub>L</sub> = 1kΩ	50	2.0	—	32	125	—	155	
					4.5	—	15	25	—	31	
					6.0	—	14	21	—	26	
Input Capacitance	C <sub>IN</sub>	—	—	—	—	—	5	10	—	10	pF
Output Capacitance	C <sub>OUT</sub>	—	—	—	—	—	10	—	—	—	
Power Dissipation Capacitance	C <sub>PD</sub>	—	Note (1)	—	—	—	33	—	—	—	



Note (1) : C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation :

$$I_{CC}(\text{opr}) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC} / 2 \text{ (per Gate)}$$

PACKAGE DIMENSIONS  
SSOP8-P-0.65

Unit : mm

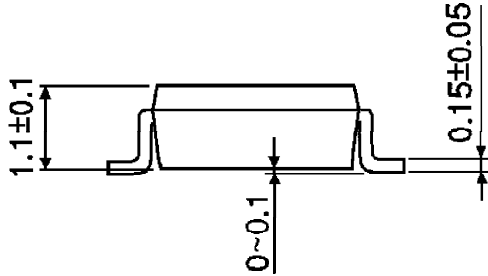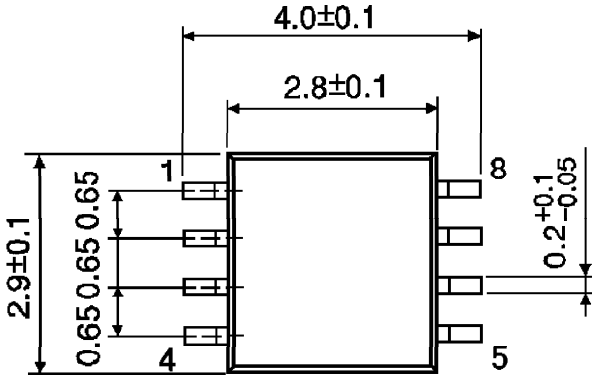

Weight : 0.02g (Typ.)

**RESTRICTIONS ON PRODUCT USE**

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.