

Protection for Lithium-Ion Batteries (3-/4-serial cells)

Monolithic IC MM1414

April 14, 1999

Outline

This IC protects lithium-ion batteries in the event of overcharge, overdischarge and overcurrent. It has the following two functions: an overcharge detection function that turns the external FET-SW off when a problem occurs during charging, etc. and excess voltage is impressed on each battery for longer than a certain time, and an overdischarge detection function that turns the external FET-SW off when battery voltage drops below a certain voltage during discharge, in order to prevent battery overdischarge. When these functions operate, the IC enters low current consumption mode. It also has an overcurrent detection function that turns the FET-SW off when excess current flows due to a short or the like. Since the functions above are provided, the protection circuitry for lithium-ion batteries can be comprised with fewer external components.

Series Table

Temperature conditions A: Ta=−25 ~ 75°C, B: Ta=−20 ~ 70°C, C: Ta=0 ~ 50°C,
D: Ta=0 ~ 40°C, E: Ta=−20 ~ 25°C

Model	Package	Overcharge detection voltage (V)	Overcharge detection voltage temperature conditions	Overcharge detection hysteresis voltage (V)	Overdischarge detection voltage (V)	Overdischarge resumption voltage (V)	Overcurrent detection voltage (mV)
MM1414	TSOP-20A	4.350±0.025	C	200±60	2.00±0.10	3.00±0.15	150±15
	AV	4.350±0.025	C	200±60	2.30±0.10	3.00±0.15	150±15
	CV	4.250±0.025	C	200±60	2.30±0.10	3.00±0.15	150±15
	DV	4.325±0.025	C	200±60	2.30±0.10	3.00±0.15	100±15
	FV	4.295±0.025	C	8±8	2.30±0.10	3.00±0.15	150±15

Features

- | | | |
|---|---|------------|
| 1. Consumption current (during overcharge) | V _{CELL} = 4.4 CON = 0V | 55µA typ. |
| 2. Consumption current (normal) | V _{CELL} = 3.5V CON = 0V | 15µA typ. |
| 3. Consumption current (during overdischarge) | V _{CELL} = 1.9V CON = 0V | 0.5µA typ. |
| 4. Consumption current (during overdischarge) | V _{CELL} = 1.0V CON = V _{CC} | 0.1µA max. |
| 5. Overcurrent release conditions | A, C, D, G; Load open 500kΩ or more
F; Load open 1MEGΩ or more | |


Package

TSOP-20A

Applications


Lithium-ion battery packs for note PCs

Pin Assignment

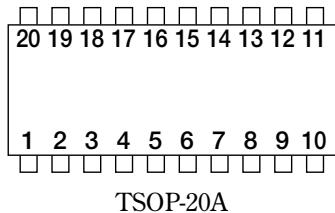

1	OV	11	SEL
2	N.C	12	N.C
3	CS	13	CON
4	N.C	14	N.C
5	DCHG	15	V1
6	N.C	16	V2
7	CDC	17	V3
8	COL	18	V4
9	COV	19	N.C
10	GND	20	Vcc

Block Diagram

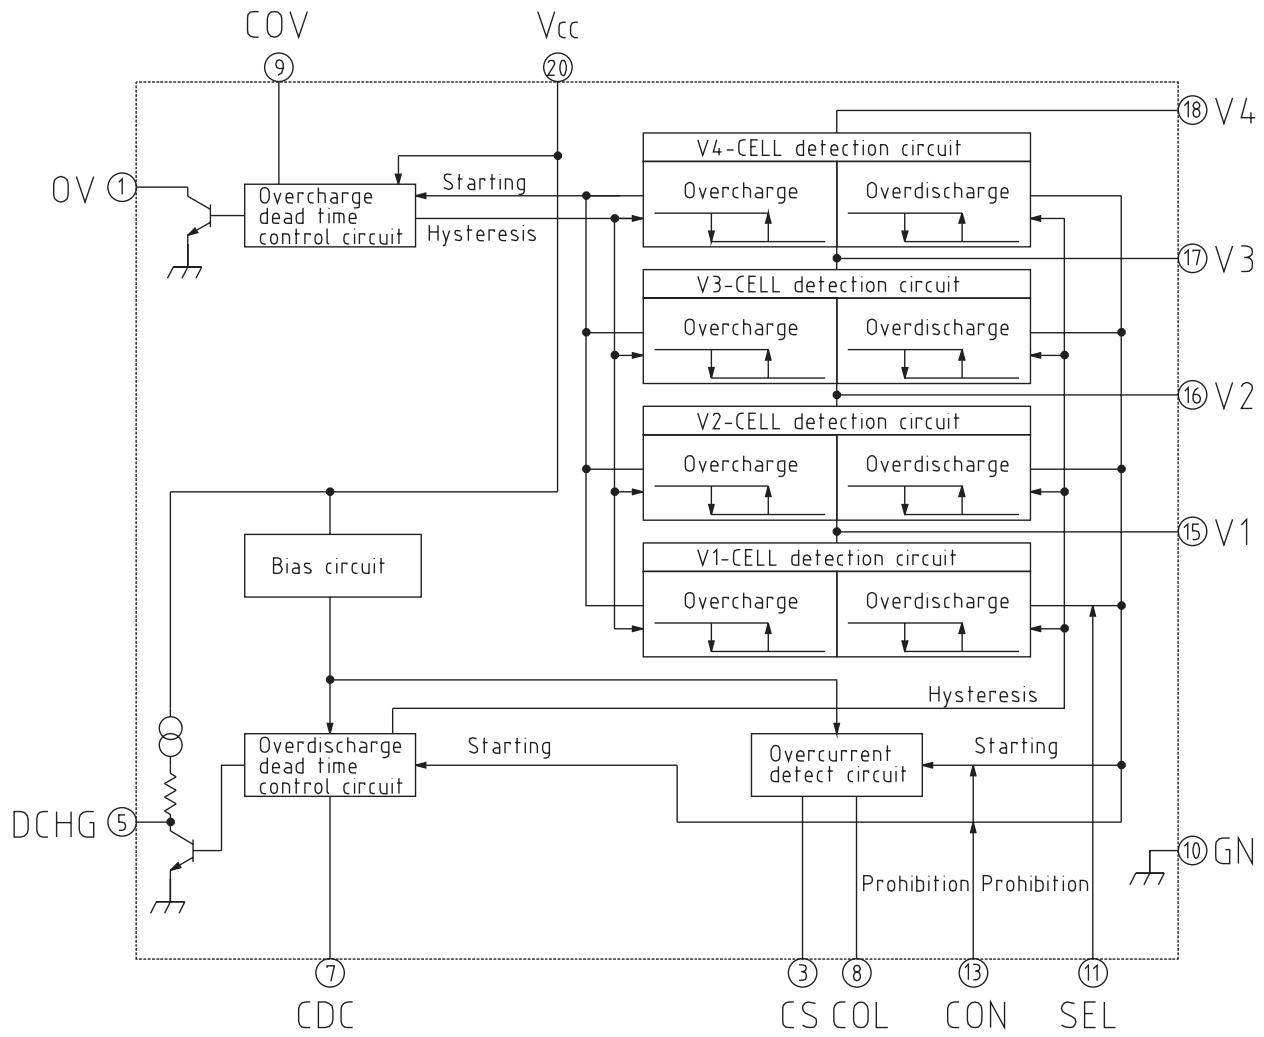

Pin Description

Pin Description

Pin	Equivalent circuit diagram	Pin	Equivalent circuit diagram
1 ; OV		9 ; COV	
3 ; CS		11 ; SEL	
5 ; DCHG		13 ; CON	
7 ; CDC		15 ; V1	
8 ; COL		16 ; V2	

Pin	Equivalent circuit diagram	Pin	Equivalent circuit diagram
17 ; V3	<p>This diagram shows the internal logic for pins 17 and V3. It includes two comparators. The first comparator monitors the voltage at pin 17 (V3) through a resistor and a diode. Its output is connected to a switch that connects pin 17 to ground. The second comparator monitors the voltage at pin 16 (V2) through a resistor and a diode. Its output is connected to a switch that connects pin 16 to ground. Both comparators also have feedback paths through resistors and diodes.</p>	18 ; V4	<p>This diagram shows the internal logic for pins 18 and V4. It includes two comparators. The first comparator monitors the voltage at pin 18 (V4) through a resistor and a diode. Its output is connected to a switch that connects pin 18 to ground. The second comparator monitors the voltage at pin 17 (V3) through a resistor and a diode. Its output is connected to a switch that connects pin 17 to ground. Both comparators also have feedback paths through resistors and diodes.</p>

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit
Storage temperature	T _{STG}	-40~+125	°C
Operating temperature	T _{OPR}	-20~+70	°C
Power supply voltage	V _{CC} max.	-0.3~24	V
OV pin impressed voltage	V _{OV} max.	-0.3~24	V
SEL pin impressed voltage	V _{SEL} max.	-0.3~24	V
CON pin impressed voltage	V _{CON} max.	-0.3~24	V
Allowable loss	P _d	300	mW


Recommended Operating Conditions

Item	Symbol	Ratings	Unit
Operating temperature	T _{OPR}	-20~+70	°C
Operating voltage	V _{OPR}	+1.8~+24	V

Electrical Characteristics(Except where noted otherwise, Ta=25°C, V_{CC}=V4+V3+V2+V1, V_{CELL}=3.5V, CON=GND, SEL=V_{CC}) Models listed MM1414G


Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Unit
Consumption current (V _{CC} pin) 1	I _{CC1}	V _{CELL} =4.4V, CON=0V		55	110	µA
Consumption current (V _{CC} pin) 2	I _{CC2}	V _{CELL} =3.5V, CON=0V		27	50	µA
Consumption current (V _{CC} pin) 3	I _{CC3}	V _{CELL} =1.8V, CON=0V		2	4	µA
Consumption current (V _{CC} pin) 4	I _{CC4}	V _{CELL} =3.5V, CON=V _{CC}		12	20	µA
Consumption current (V _{CC} pin) 5	I _{CC5}	V _{CELL} =1.8V, CON=V _{CC}		1	2	µA
Consumption current (V4 pin) 1	I _{1V4}	V _{CELL} =4.4V		10	20	µA
Consumption current (V4 pin) 2	I _{2V4}	V _{CELL} =3.5V		8	15	µA
Consumption current (V4 pin) 3	I _{3V4}	V _{CELL} =1.8V		2.5	5.0	µA
V3 pin input current	I _{V3}	V _{CELL} =3.5V	-300	0	+300	nA
V2 pin input current	I _{V2}	V _{CELL} =3.5V	-300	0	+300	nA
V1 pin input current	I _{V1}	V _{CELL} =3.5V	-300	0	+300	nA
Overcharge detection voltage	V _{CELLU}	V _{CELL} : 4.2V→4.4V, Ta=0~50°C	4.270	4.295	4.320	V
Overcharge hysteresis voltage	ΔV _U	V _{CELL} : 4.2V→4.4V→3.9V		8	16	mV
Overcharge sensing dead time	t _{OV}	COV=0.1µF	0.5	1.0	1.5	s
Overdischarge detection voltage	V _{CELLS}	V _{CELL} : 3.5V→1.8V	2.20	2.30	2.40	V
Discharge resume voltage	V _{CELLD}	V _{CELL} : 1.8V→3.5V	2.85	3.00	3.15	V
Overdischarge hysteresis voltage	ΔV _{DS}	V _{CELLD} -V _{CELLS}	0.45	0.70	0.95	V
Overdischarge sensing dead time	t _{CDC}	CDC=0.1µF	0.5	1.0	1.5	s
Overcurrent detection voltage	V _{OCC}	V _{CC} -V _{CS} , DCHG	135	150	165	mV
Overcurrent hysteresis voltage	ΔV _{OCC}			20	40	mV
Overcurrent sensing dead time 1	t _{COL1}	COL=0.001µF	5	10	15	ms
Overcurrent sensing dead time 2	t _{COL2}	COL=0.001µF, V _{CC} -CS>1.0V		1.5	3.0	ms
Overcurrent sensing dead time 3	t _{COL3}	COL=0.001µF	5	10	15	ms
Overcurrent reset conditions			Load release conditions 500kΩ			
DCHG pin source current	I _{oDCH}	V _{CELL} =1.8V, SW1 : A VDCHG=V _{CC} -0.8V	20			µA
DCHG pin sink current	I _{sIDCH}	V _{CELL} =3.5V, SW1 : A VDCHG=0.8V	20			µA
DCHG pin output voltage H	V _{THDcH}	V _{CC} -VDCHG, Iso=20µA, SW1 : B			0.8	V
DCHG pin output voltage L	V _{THDcL}	VDCHG-GND, Isi=-20µA, SW1 : B			0.8	V
OV pin sink current	I _{sIOV}	VOV=0.4V, Ta=-20~+70°C	100			µA
OV pin leak current	I _{LKV}	VOV=24V			0.1	µA
CON pin L voltage		DCHG= "High"			0.4	V
CON pin H voltage		DCHG= "Low"	V _{CC} -0.4			V
CON pin current		V _{CELL} =3.5V, CON=0.4V		1	2	µA
SEL pin L voltage		for 3 cell			0.4	V
SEL pin H voltage		for 4 cell	V _{CC} -0.4			V
SEL pin current		V _{CELL} =3.5V, SEL=0.4V		1	2	µA

Measuring Circuit

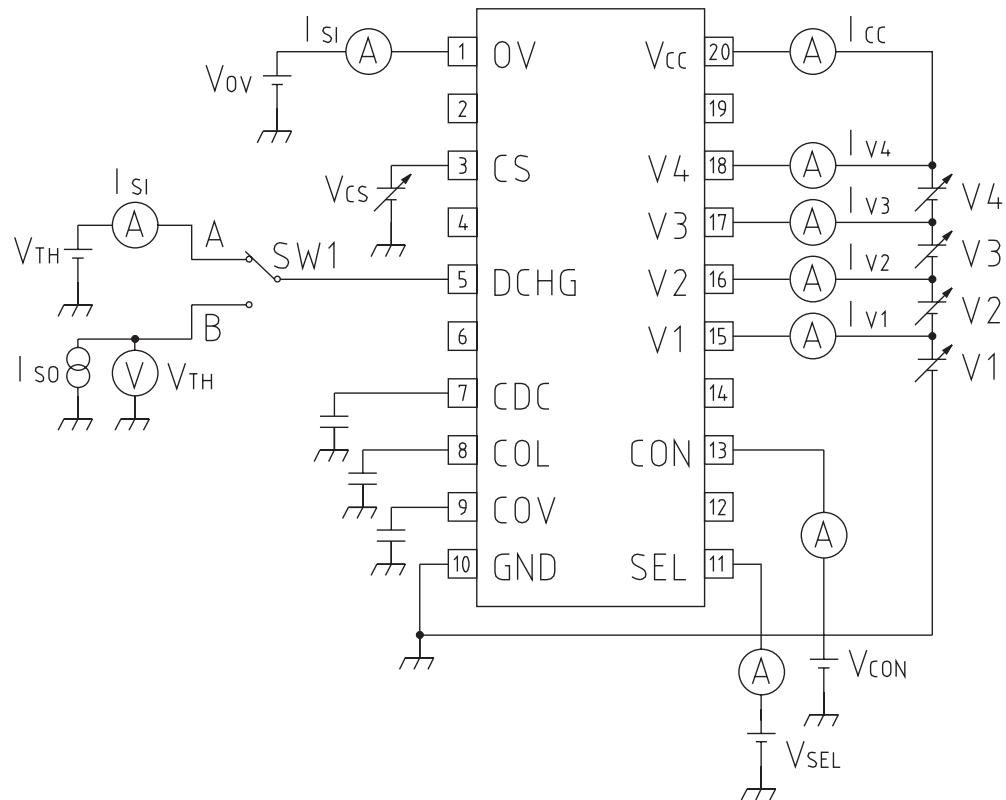


Timing Chart


For overcharge

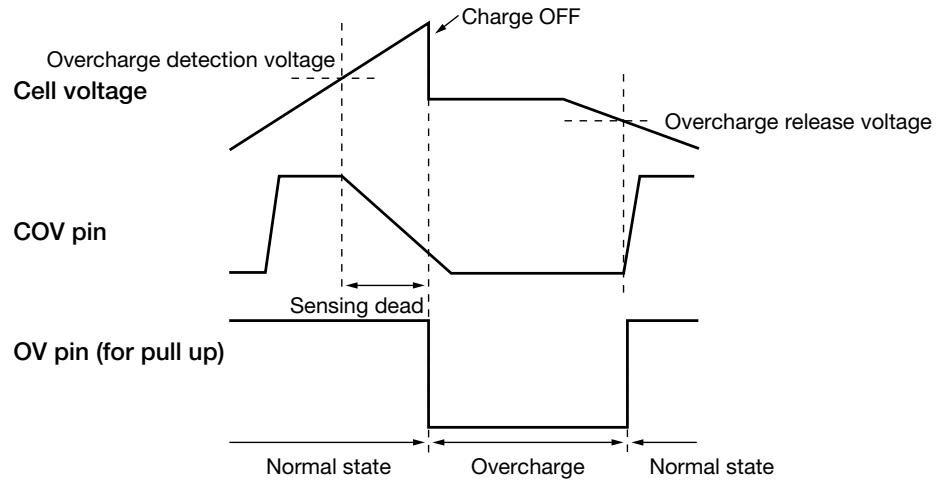


■ For overdischarge

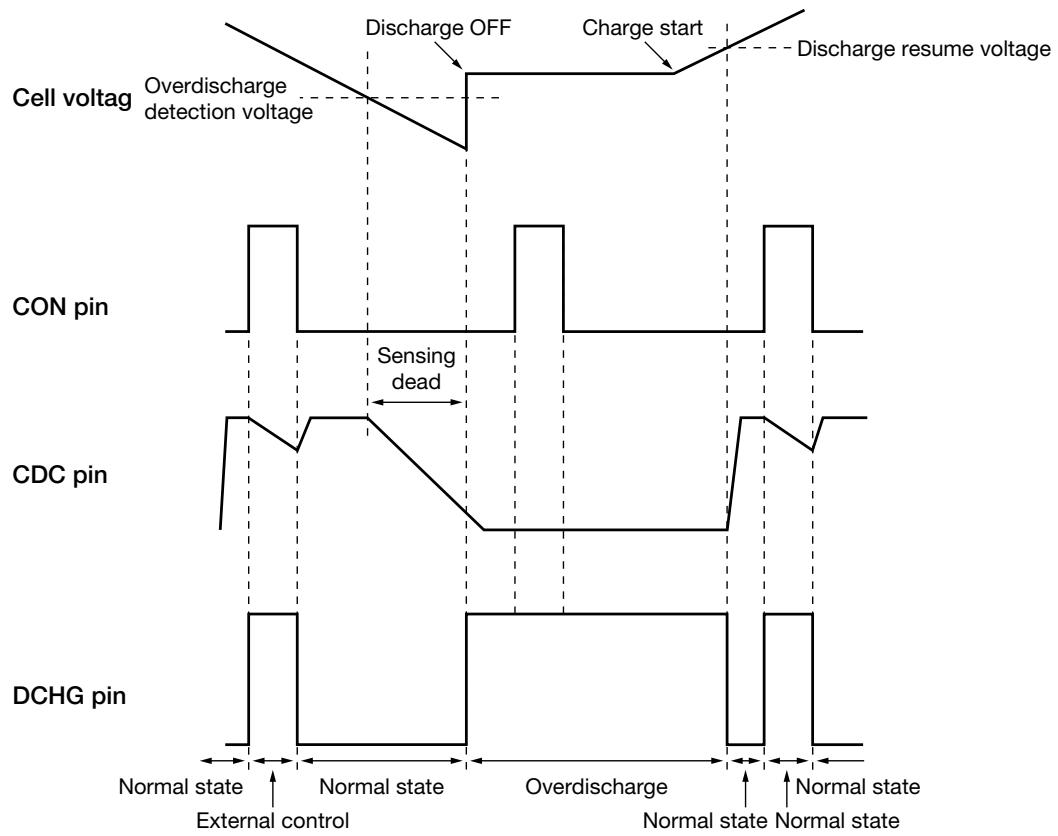

■ For overcurrent

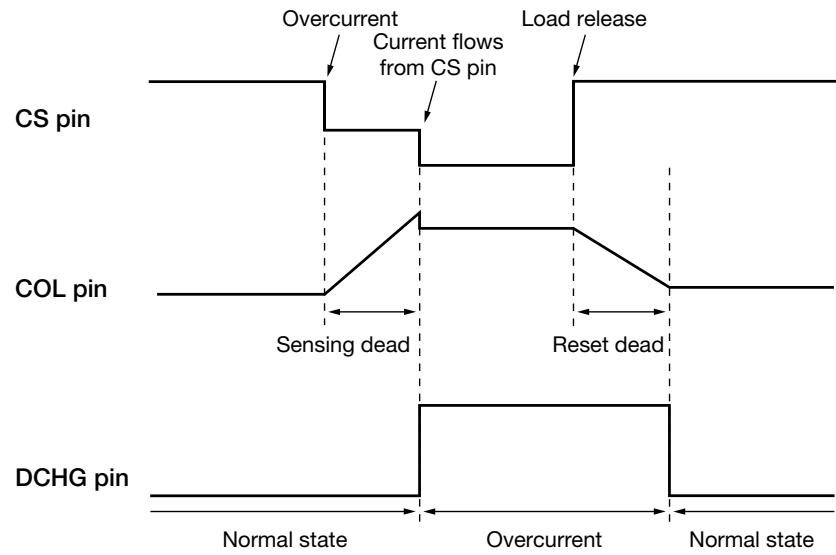


Application Circuit

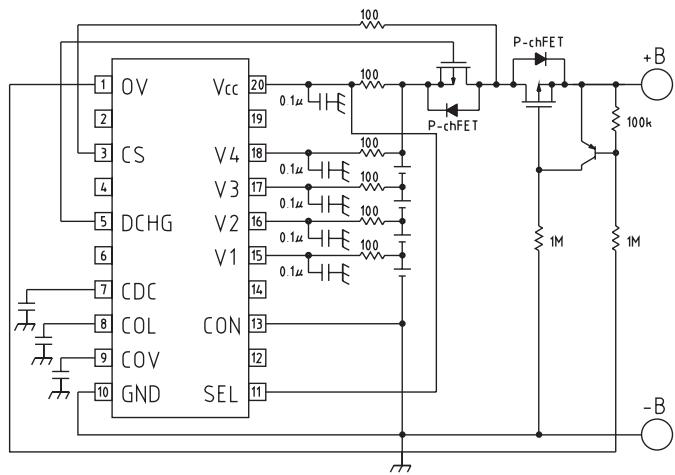


Note: Applicable circuits shown are typical examples provided for reference purposes. Mitsumi cannot assume responsibility for any problems arising out of the use of these circuits or for any infringement of third party patent and other right due to same.

Characteristics


Overcharge & Overdischarge Sensing Dead Times

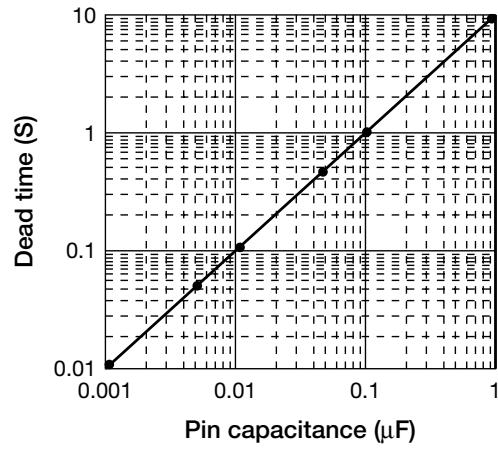

Overcurrent Sensing Dead Time 1, Overcurrent Reset Dead Time 3

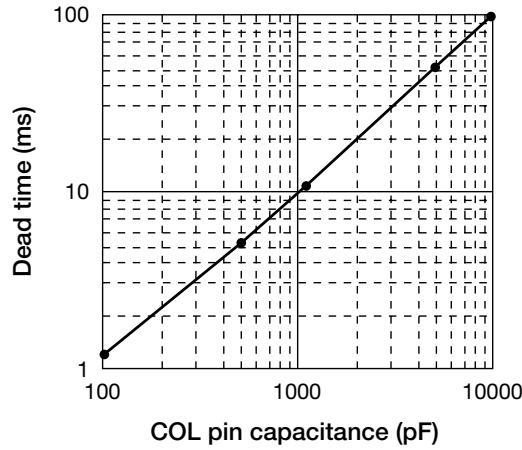

Overcurrent Sensing Dead Time 2

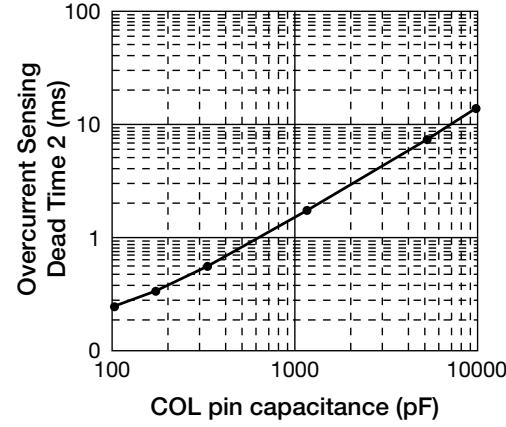

Note: The above characteristics are representative values only, and are not guaranteed.