
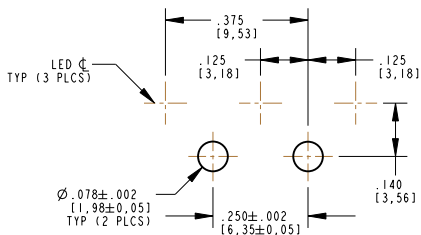

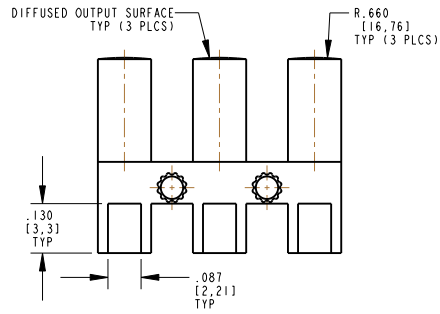



REV	ECN NO	REVISIONS	DRW CKD	APP	DATE
A		NEW RELEASE	KLJ	ALV	N. O. 14-30-09

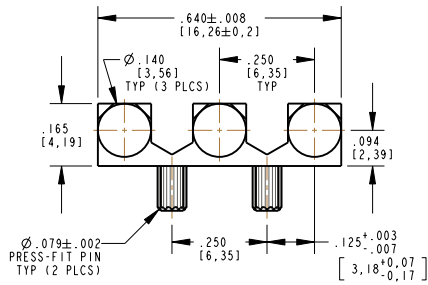


RECOMMENDED HOLE PATTERN
UNLESS OTHERWISE SPECIFIED, HOLE PATTERN TOLERANCES ARE ±.003

RoHS COMPLIANT 515-1069F
Part Numbers with the "F" suffix ending are RoHS Compliant. Packaging is marked with "RoHS Compliant" label or equivalent markings.

NOTES:

- COMPONENTS MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE (UL 94V-0 FLAMMABILITY).
- COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
- STORAGE AND OPERATING TEMPERATURE: -30°C TO 100°C
- DIALIGHT PART NUMBER: 515-1069F

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE: 4:000 ALL DIM'S IN: INCHES (MM)	DRAWING NUMBER C-17730	REV A
TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS (.XX): ±.01 DECIMALS (.XXX): ±.005	TITLE 3 ELEMENT LIGHT PIPE	
FINISH:	MATERIAL	
FSCM 83330	 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727	
SHEET 1 OF 1 FAMILY TABLE:		