




Data Sheet Supplement
Version 3.0 (valid for 8" product)

Dynamic Differential Hall Effect Sensor

TLE4925C-HT E6747

For all parameters not specified in this document the TLE4925C data sheet is valid.

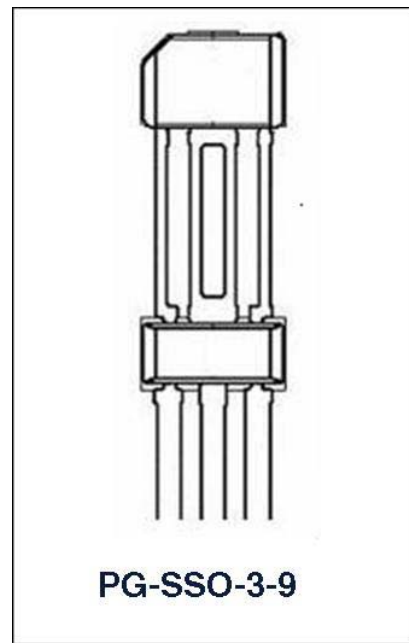

Type	Marking	Ordering Code	Package
TLE4925C-HT E6747	25C8	SP000269342	PG-SSO-3-9

1 Package

- 47nF capacitor¹ between V_S and GND needed for micro cuts in power supply using existing P-SSO-3-9 package.

Parameter	Symbol	min.	typ.	max.	Unit	Conditions
Lead frame thickness (data sheet page 24)	-	0.20		0.24	mm	

2 Absolute Maximum Ratings

Parameter	Symbol	min.	typ.	max.	Unit	Conditions
Junction temperature	T _j	-40			°C	-
				155	°C	5000 h (not additive)
				165	°C	2500 h (not additive)
				175	°C	500 h (not additive)
				195	°C	10x1 h (additive to the other life times).

3 Operating Range

Parameter	Symbol	min.	typ.	max.	Unit	Conditions
Operating junction temperature	T _j	-40			°C	-
				155	°C	5000 h (not additive)
				165	°C	2500 h (not additive)
				175	°C	500 h (not additive) reduced signal quality permissible (e.g. jitter).

4 ESD Protection

No.	Parameter	Symbol	max	Unit	Remarks
	ESD – protection	V _{ESD}	± 4	kV	According to standard EIA/JESD22-A114-B Human Body Model (HBM 1500 Ohm/100pF)

¹ value of capacitor: 47nF±10%; (excluded drift due to temperature and over lifetime); ceramic: X7R; maximum voltage: 50V.

5 Electro Magnetic Compatibility – (values depend on RSeries)

Ref. ISO 7637-1; see test circuit of figure 15 (basic data sheet);

$\Delta B_{PP} = 10\text{mT}$ (ideal sinusoidal signal); $V_S = 13.5\text{V} \pm 0.5\text{V}$, $f_B = 1000\text{Hz}$; $T = 25^\circ\text{C}$; $R_{Series} \geq 200\Omega$;

No.	Parameter	Symbol	Level/typ	Status
4.1.1	Testpulse 1	V_{EMC}	I / -30V	C
	Testpulse 2		IV / 100V	C
	Testpulse 3a		IV / -150V	A
	Testpulse 3b		IV / 100V	A
	Testpulse 4		IV / -7V	A
	Testpulse 5		III / 66.5V	C

Note: Test criteria for status A: No missing pulse no additional pulse on the IC output signal plus duty cycle and jitter are in the specification limits.

Test criteria for status B: No missing pulse no additional pulse on the IC output signal. (Output signal "OFF" means switching to the voltage of the pull-up resistor).

Test criteria for status C: One or more parameter can be out of specification during the exposure but returns automatically to normal operation after exposure is removed.

Test criteria for status E: IC destroyed. Testpulse 5: $f_B = 100\text{Hz}$

Ref. ISO 7637-3; TP 1 and TP 2 ref. DIN 40839-3; see test circuit of figure 15 (basic data sheet);

$\Delta B_{PP} = 10\text{mT}$ (ideal sinusoidal signal); $V_S = 13.5\text{V} \pm 0.5\text{V}$, $f_B = 1000\text{Hz}$; $T = 25^\circ\text{C}$; $R_{Series} \geq 200\Omega$;

No.	Parameter	Symbol	Level/typ	Status
4.1.2	Testpulse 1	V_{EMC}	IV / -30V	A
	Testpulse 2		IV / 30V	A
	Testpulse 3a		IV / -60V	A
	Testpulse 3b		IV / 40V	A

Ref. ISO 11452-3; see test circuit of figure 15 (basic data sheet); measured in TEM-cell;

$\Delta B_{PP} = 4\text{mT}$ (ideal sinusoidal signal); $V_S = 13.5\text{V} \pm 0.5\text{V}$, $f_B = 200\text{Hz}$; $T = 25^\circ\text{C}$; $R_{Series} \geq 200\Omega$;

No.	Parameter	Symbol	Level/max	Remarks
4.1.3	EMC field strength	$E_{TEM-Cell}$	IV / 200V/m	AM=80%, f=1kHz;

Note: Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Test condition for the trigger window: $f_{B-field} = 200\text{Hz}$, $B_{pp} = 4\text{mT}$, vertical limits are $\pm 200\text{mV}$ and horizontal limits are $\pm 200\mu\text{s}$.

Revision History:**April 2007**

Version 3.0

Previous Version: 2.1	
Page	Subjects (major changes since last revision)
1	Data sheet is valid for 8" products
1	Ordering code updated
2	ESD performance updated
3	EMC performance conducted pulses ISO7637-1 TP5 updated

Infineon Technologies AG

© Infineon Technologies AIM SC

All Rights Reserved.<http://www.infineon.com/products/sensors>**We Listen to Your Comments**

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to:

Sensors@infineon.com