

---

## PRECISION 2.45 VOLT VOLTAGE REFERENCE

---

### DEVICE DESCRIPTION

The ZRA245 uses a bandgap circuit design to achieve a precision voltage reference of 2.45 volts. The device is available in small outline surface mount packages, ideal for applications where space saving is important.

The ZRA245 design provides a stable voltage without an external capacitor and is stable with capacitive loads. The ZRA245 is recommended for operation between 2mA and 120mA.

### FEATURES


- Small outline SOT23, SO8 and TO92 style package
- No stabilising capacitor required
- Typical  $T_C$  15ppm/°C
- Typical slope resistance 0.26Ω
- ± 3% , 2% and 1% tolerance
- Industrial temperature range
- Operating current 2mA to 120mA

### APPLICATIONS

- Battery powered and portable equipment.
- Metering and measurement systems.
- Instrumentation.
- Test equipment.
- Data acquisition systems.
- Precision power supplies.

---

### SCHEMATIC DIAGRAM

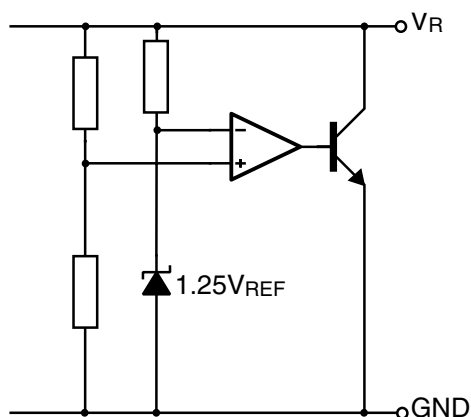

# ZRA245

## ABSOLUTE MAXIMUM RATING

|                       |              |   |       |
|-----------------------|--------------|---|-------|
| Reverse Current       | 200mA        | <b>Power Dissipation (T<sub>amb</sub>=25°C)</b> |       |
| Forward Current       | 25mA         | SOT23   | 330mW |
| Operating Temperature | -40 to 85°C  | E-Line, 3 pin (TO92)                            | 500mW |
| Storage Temperature   | -55 to 125°C | E-Line, 2 pin (TO92)                            | 500mW |
|                       |              | S08   | 625mW |

## ELECTRICAL CHARACTERISTICS TEST CONDITIONS (Unless otherwise stated) T<sub>amb</sub>=25°C

| SYMBOL           | PARAMETER                                   | CONDITIONS   | LIMITS               |                      |                      | TOL. %      | UNITS   |
|------------------|---|--|----------------------|----------------------|----------------------|-------------|---------|
|                  |   |  | MIN.                 | TYP.                 | MAX.                 |             |         |
| V <sub>R</sub>   | Reverse Breakdown Voltage                   | I <sub>R</sub> =5mA  | 2.43<br>2.40<br>2.38 | 2.45<br>2.45<br>2.45 | 2.47<br>2.50<br>2.52 | 1<br>2<br>3 | V       |
| I <sub>MIN</sub> | Minimum Operating Current                   |  |                      |                      | 2                    |             | mA      |
| I <sub>R</sub>   | Recommended Operating Current               |  | 2                    |                      | 120                  |             | mA      |
| T <sub>C</sub> † | Average Reverse Breakdown Voltage Temp. Co. | I <sub>R</sub> (min) to I <sub>R</sub> (max)                           |                      | 15                   | 50                   |             | ppm/°C  |
| R <sub>S</sub> § | Slope Resistance                            |  |                      | 0.26                 | 0.5                  |             | Ω       |
| Z <sub>R</sub>   | Reverse Dynamic Impedance                   | I <sub>R</sub> =5mA<br>f =100Hz<br>I <sub>AC</sub> =0.1 I <sub>R</sub> |                      | 0.28                 | 1                    |             | Ω       |
| E <sub>N</sub>   | Wideband Noise Voltage                      | I <sub>R</sub> = 5mA<br>f = 10Hz to 10kHz                              |                      | 65                   |                      |             | μV(rms) |

$$\dagger T_c = \frac{(V_{R(max)} - V_{R(min)}) \times 1000000}{V_R \times (T_{(max)} - T_{(min)})}$$


Note: V<sub>R</sub>(max) - V<sub>R</sub>(min) is the maximum deviation in reference voltage measured over the full operating temperature range.

$$\S R_s = \frac{V_R \text{ Change}(I_{R(MIN)} \text{ to } I_{R(MAX)})}{I_{R(MAX)} - I_{R(MIN)}}$$








ISSUE 4 — JANUARY 2006

## TYPICAL CHARACTERISTICS

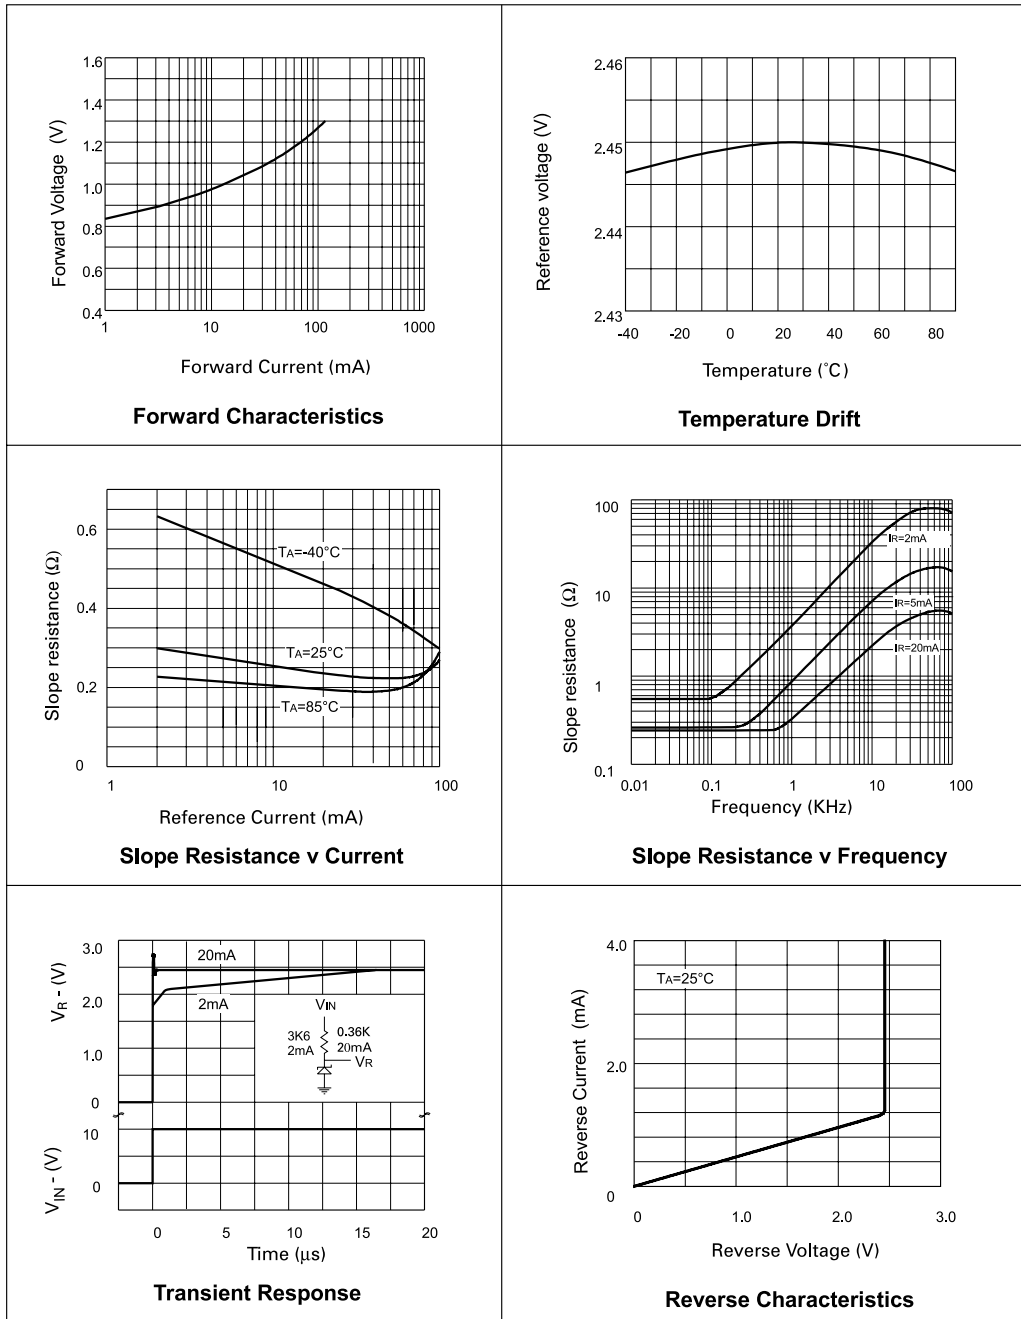

# ZRA245

## CONNECTION DIAGRAMS

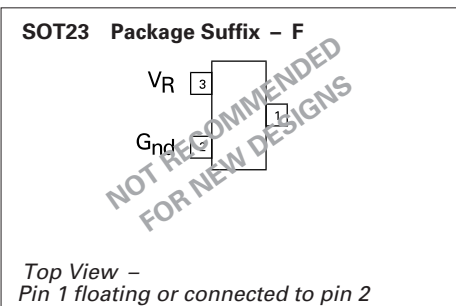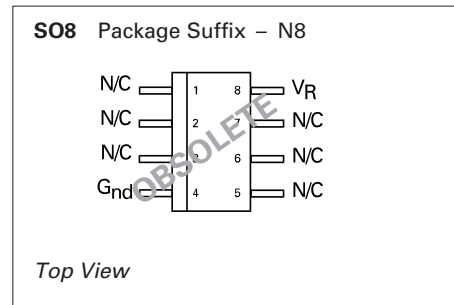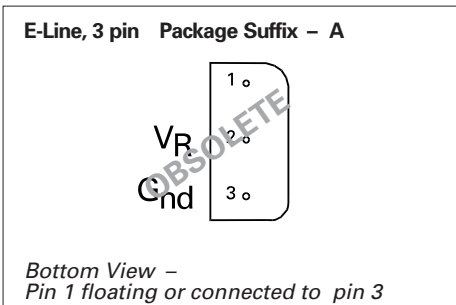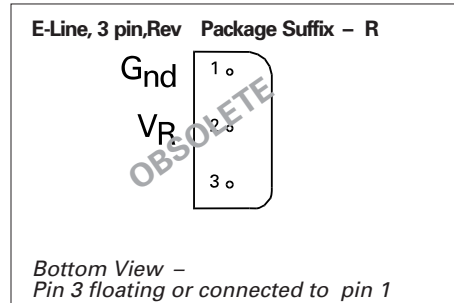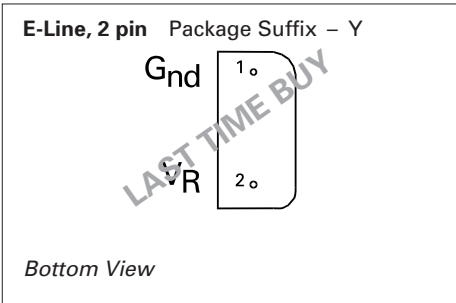

# ZRA245

## ORDERING INFORMATION

| Part No    | Tol. % | Package  | Partmark |
|------------|--------|----------|----------|
| ZRA245A03  | 3      | E-Line • | ZRA24503 |
| ZRA245A02  | 2      | E-Line • | ZRA24502 |
| ZRA245A01  | 1      | E-Line • | ZRA24501 |
| ZRA245F03  | 3      | SOT23    | 24A      |
| ZRA245F02  | 2      | SOT23    | 24B      |
| ZRA245F01  | 1      | SOT23    | 24C      |
| ZRA245N803 | 3      | SO8      | ZRA24503 |
| ZRA245N802 | 2      | SO8      | ZRA24502 |
| ZRA245N801 | 1      | SO8      | ZRA24501 |

| Part No   | Tol. % | Package  | Partmark |
|-----------|--------|----------|----------|
| ZRA245R03 | 3      | E-Line * | ZRA245R3 |
| ZRA245R02 | 2      | E-Line * | ZRA245R2 |
| ZRA245R01 | 1      | E-Line * | ZRA245R1 |
| ZRA245Y03 | 3      | E-Line † | ZRA24503 |
| ZRA245Y02 | 2      | E-Line † | ZRA24502 |
| ZRA245Y01 | 1      | E-Line † | ZRA24501 |

\* E-Line 3 pin Reversed  
 † E-Line 2 pin  
 • E-Line 3 pin

© Zetex Semiconductors plc 2006

| Europe  | Americas   | Asia Pacific   | Corporate Headquarters  |
|---|--|--|---|
| Zetex GmbH<br>Streitfeldstraße 19<br>D-81673 München<br>Germany   | Zetex Inc<br>700 Veterans Memorial Hwy<br>Hauppauge, NY 11788<br>USA   | Zetex (Asia) Ltd<br>3701-04 Metroplaza Tower 1<br>Hing Fong Road, Kwai Fong<br>Hong Kong                             | Zetex Semiconductors plc<br>Zetex Technology Park<br>Chadderton, Oldham, OL9 9LL<br>United Kingdom      |
| Telefon: (49) 89 45 49 49 0<br>Fax: (49) 89 45 49 49 49<br><a href="mailto:europa.sales@zetex.com">europa.sales@zetex.com</a> | Telephone: (1) 631 360 2222<br>Fax: (1) 631 360 8222<br><a href="mailto:usa.sales@zetex.com">usa.sales@zetex.com</a> | Telephone: (852) 26100 611<br>Fax: (852) 24250 494<br><a href="mailto:asia.sales@zetex.com">asia.sales@zetex.com</a> | Telephone (44) 161 622 4444<br>Fax: (44) 161 622 4446<br><a href="mailto:hq@zetex.com">hq@zetex.com</a> |

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to [www.zetex.com](http://www.zetex.com)

ISSUE 4 — JANUARY 2006