



TL062

LINEAR INTEGRATED CIRCUIT

LOW POWER DUAL J-FET OPERATIONAL AMPLIFIER

DESCRIPTION

The UTC **TL062** is a high speed J-FET input dual operational amplifier. It incorporates well matched, high voltage J-FET and bipolar transistors in a monolithic integrated circuit. The device features high slew rates, low input bias and offset currents, and low offset voltage temperature coefficient.


FEATURES

- * Very low power consumption
- * Wide common-mode (up to V_{CC+}) and differential voltage range
- * Low input bias and offset current
- * Output short-circuit protection
- * High input impedance J-FET input stage
- * Internal frequency compensation
- * Latch up free operation
- * Typical supply current: 200 μ A

ORDERING INFORMATION


| Ordering Number | | Package | Packing |
|-----------------|-------------------|---------|-----------|
| Normal | Lead Free Plating | | |
| TL062-D08-T | TL062L-D08-T | DIP-8 | Tube |
| TL062-S08-R | TL062L-S08-R | SOP-8 | Tape Reel |
| TL062-S08-T | TL062L-S08-T | SOP-8 | Tube |

| | |
|---|--|
| <p>TL062L-D08-T</p> <p>(1) Packing Type (2) Package Type (3) Lead Plating</p> | <p>(1) T: Tube, R: Tape Reel (2) D08: DIP-8, S08: SOP-8 (3) L: Lead Free Plating, Blank: Pb/Sn</p> |
|---|--|

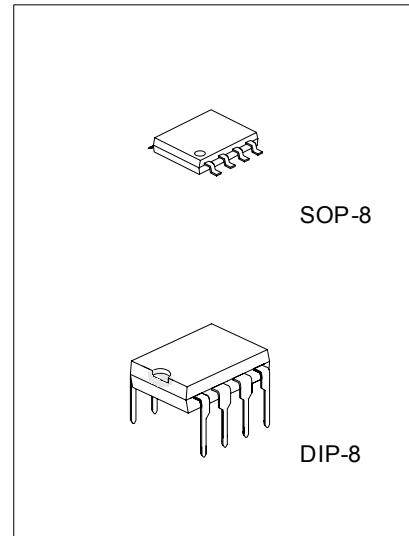


*Pb-free plating product number: TL062L

■ PIN CONFIGURATIONS

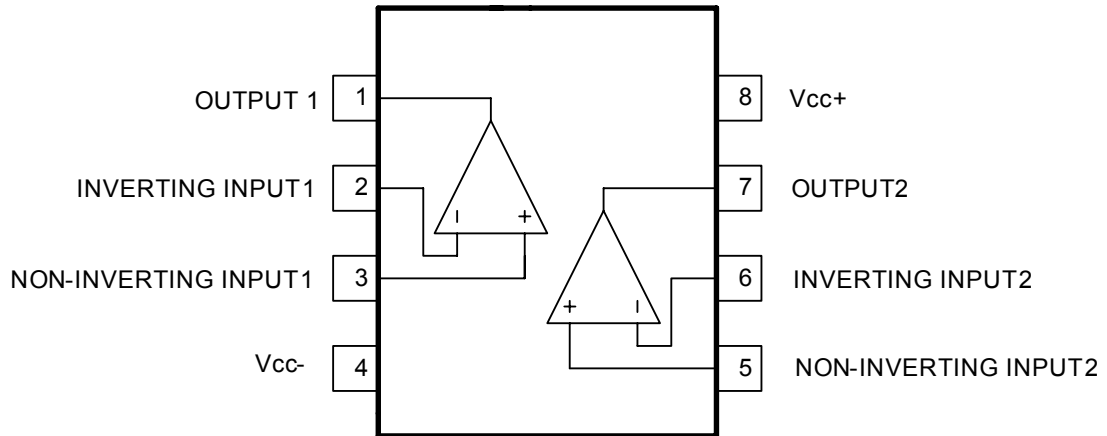

■ BLOCK DIAGRAM

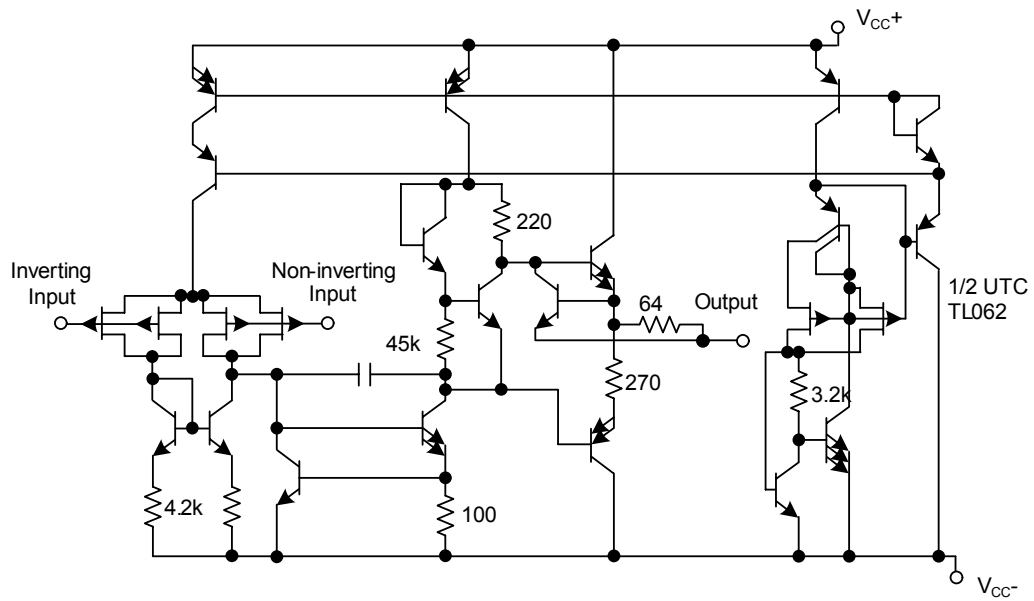

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|--|----------------------|------------|------|
| Supply Voltage (note 1) | V _{CC} | ±18 | V |
| Input Voltage (note 2) | V _{IN} | ±15 | V |
| Differential Input Voltage (note 3) | V _{I(DIFF)} | ±30 | V |
| Power Dissipation | P _D | 680 | mW |
| Output Short-Circuit Duration (Note 4) | | Infinite | |
| Operating Free Air Temperature | T _{OPR} | 0 ~ +70 | °C |
| Storage Temperature | T _{STG} | -65 ~ +150 | °C |

Notes: 1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between V_{CC-} and V_{CC+}.

- The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
- Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal.
- The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.



■ ELECTRICAL CHARACTERISTICS

(V_{CC}= ± 15V, Ta=25°C, unless otherwise specified)







| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|---|----------------------------------|---|--------------------------------------|------------------|-----|-------|------|
| Input Offset Voltage | V _{I(OFF)} | R _S =50Ω | Ta=25°C | | 3 | 15 | mV |
| | | | T _{MIN} Ta T _{MAX} | | | 20 | mV |
| Input Common Mode Voltage | V _{I(CM)} | | ±11 | -12~+15 | | V | |
| Output Voltage Swing | V _{O(SW)} | R _L =10kΩ, C _L =100pF | Ta=25°C | | 20 | 27 | V |
| | | | T _{MIN} Ta T _{MAX} | 20 | | | |
| Large Signal Voltage Gain | G _V | R _L =10Ω, V _{OUT} =±10V | Ta=25°C | | 3 | 6 | V/mV |
| | | | T _{MIN} Ta T _{MAX} | 3 | | | |
| Temperature Coefficient of Input Offset Voltage | V _{I(OFF)} | R _S =50Ω | | 10 | | μV/°C | |
| Supply Current | I _{CC} | Ta=25°C, no load, no signal | | 250 | 350 | μA | |
| Input Offset Current* | I _{I(OFF)} | Ta=25°C | | 5 | 200 | pA | |
| | | T _{MIN} Ta T _{MAX} | | | 5 | nA | |
| Input Bias Current* | I _{I(BIAS)} | Ta=25°C | | 30 | 400 | pA | |
| | | T _{MIN} Ta T _{MAX} | | | 10 | nA | |
| Gain Bandwidth Product | GB _W | Ta=25°C, R _L =10kΩ, C _L =100Pf | | 1 | | MHz | |
| Input Resistance | R _{IN} | | | 10 ¹² | | Ω | |
| Common Mode Rejection Ratio | CMR | R _S =50Ω | 70 | 76 | | dB | |
| Supply Voltage Rejection Ratio | SVR | R _S =50Ω | 70 | 95 | | dB | |
| Slew Rate | SR | V _{IN} =10V, R _L =10kΩ, C _L =100pF, G _V =1 | 0.91 | 1.1 | | V/μs | |
| Channel Separation | V _{O1} /V _{O2} | G _V =100, Ta=25°C | | 120 | | dB | |
| Total Power Consumption | | Ta=25°C, no load, no signal | | 6 | 7.5 | mW | |
| Rise Time | t _R | V _{IN} =20mV, R _L =10kΩ, C _L =100pF, G _V =1 | | 0.2 | | μs | |
| Overshoot Factor | K _{OV} | V _{IN} =20mV, R _L =10kΩ, C _L =100pF, G _V =1 | | 10 | | % | |
| Equivalent Input Noise Voltage | e _N | R _S =100Ω, f=1KHz | | 42 | | | |

*The Input bias currents of a FET-input operational amplifier are normal junction reverse currents, which are temperature sensitive. Pulse techniques must be used that will maintain the junction temperature as close to the ambient temperature as possible.







■ PARAMETER MEASUREMENT INFORMATION

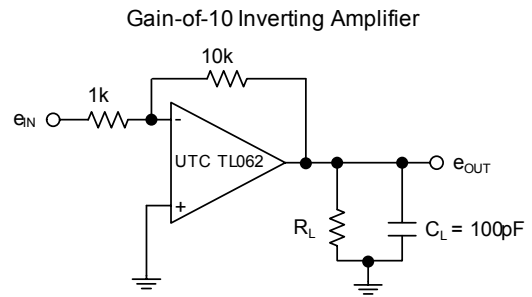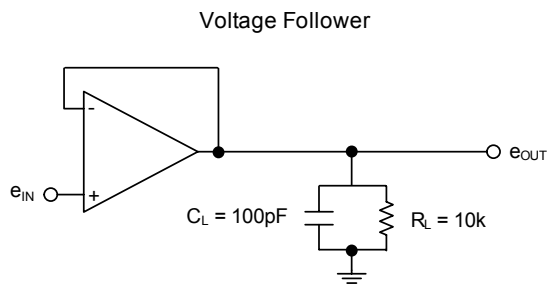

■ TYPICAL CHARACTERISTICS

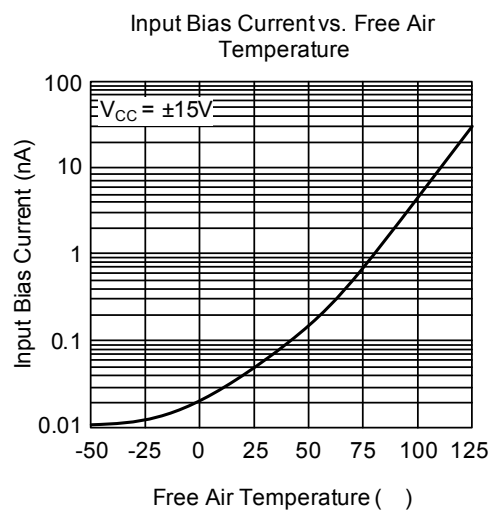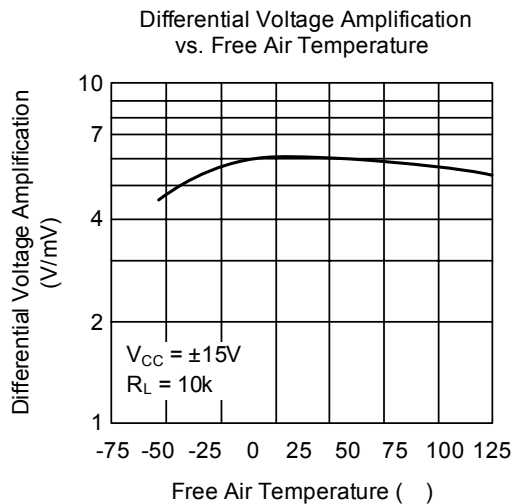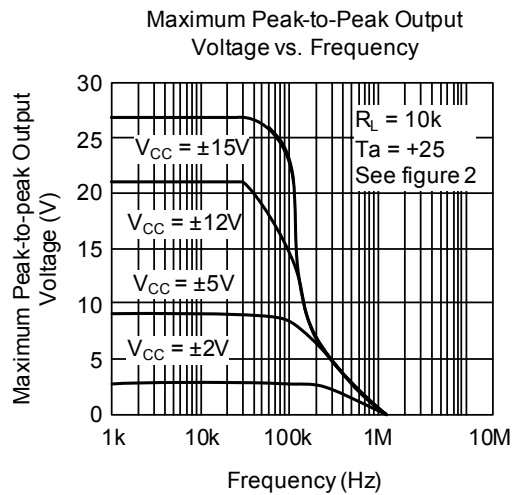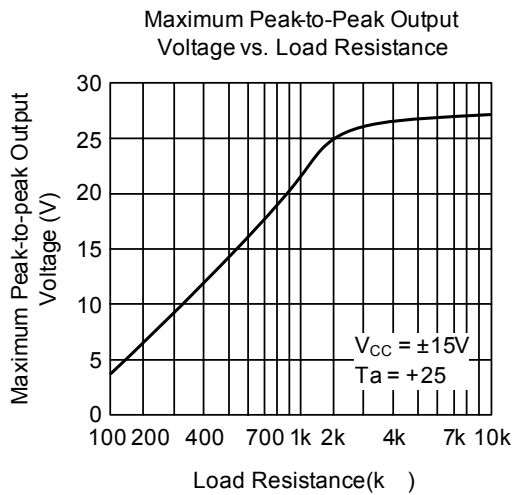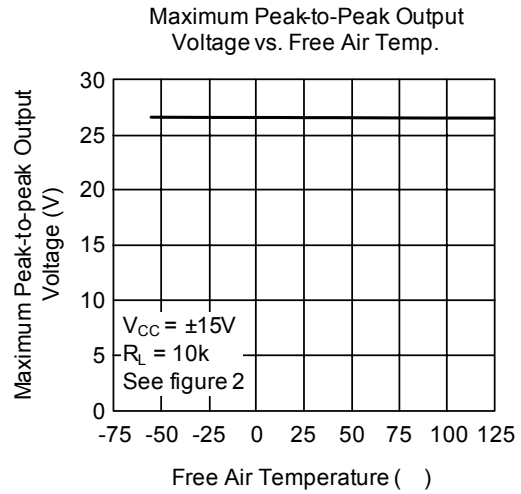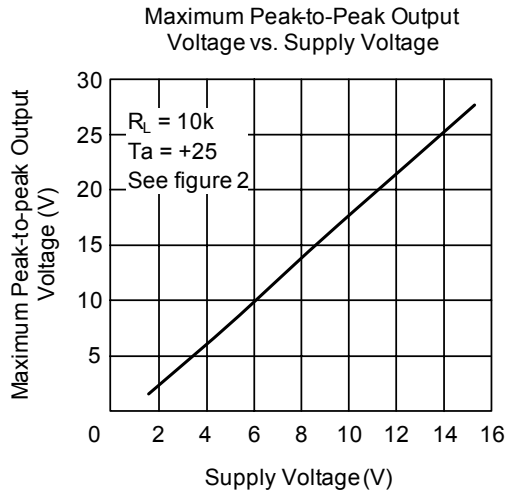

■ TYPICAL CHARACTERISTICS(Cont.)

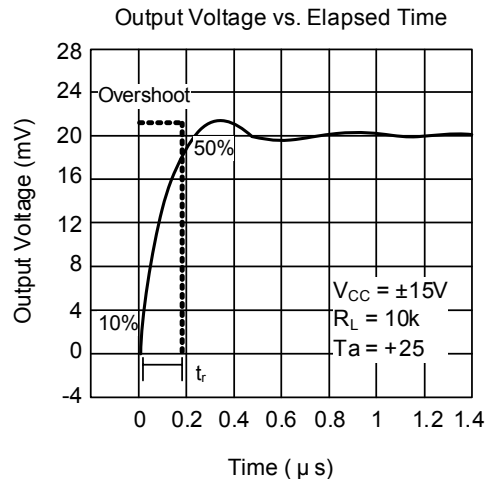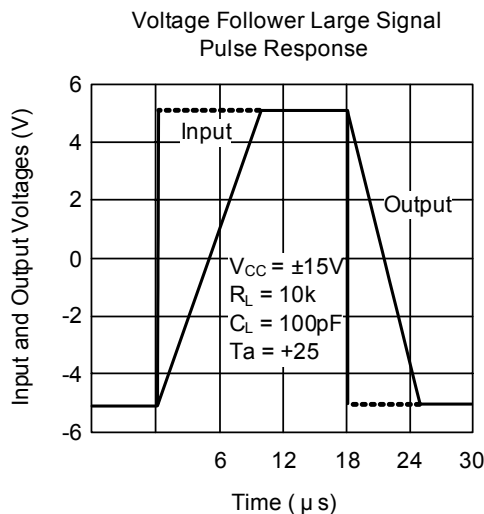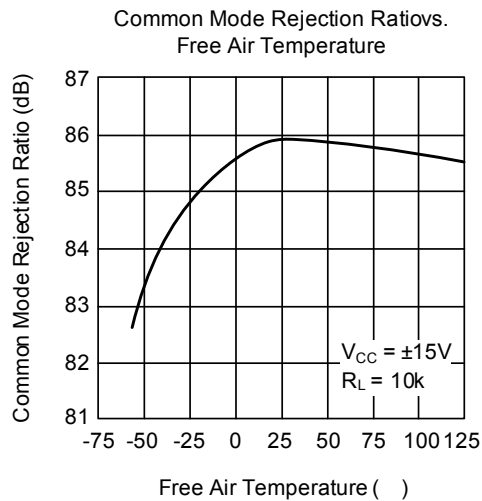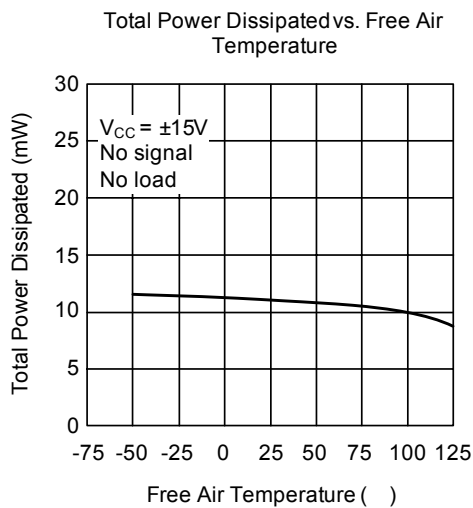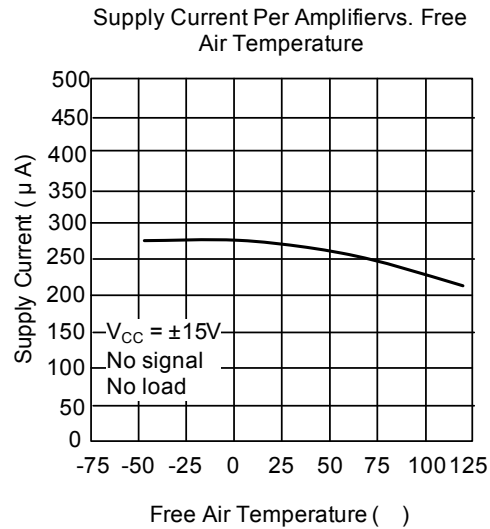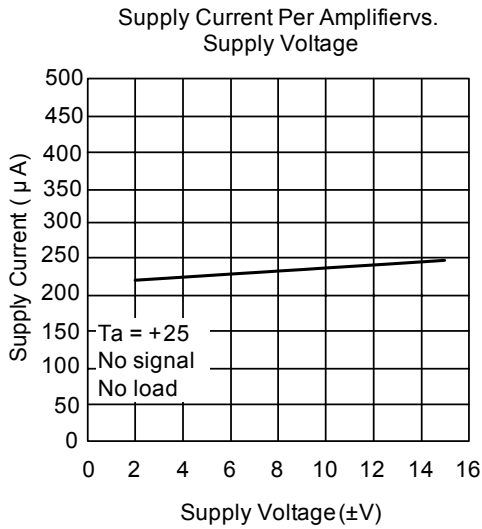

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

