

1A LDO Voltage Regulator with “GreenOperation”

GreenOperation-Compatible

GENERAL DESCRIPTION

The XC6220 series is a highly accurate, low noise, high speed, low dropout, and large current CMOS voltage regulator with GreenOperation function. The series consists of a voltage reference, an error amplifier, a current limiter, an inrush current prevention circuit and a phase compensation circuit plus a driver transistor.

With a 0.2Ω on-resistance driver transistor integrated and with output currents up to 1A, the ultra low dropout voltage performance greatly extends battery life as does the GreenOperation function which can switch between high speed and power save modes automatically. Low ESR ceramic capacitors can be used for the output stabilization capacitor (C_L).

Output voltage is selectable in 0.05V increments within the range of 0.8V~5.0V, using laser trimming technologies.

An over current protection circuit and a thermal shutdown circuit are built in. The over current protection circuit will operate when the output current reaches its limit current. The thermal shutdown circuit will operate when the junction temperature reaches its limit temperature. The inrush protection circuit works by controlling the inrush current which is charged to C_L when the IC starts up. In this way, any fluctuations to V_{IN} caused by inrush current during system start up can be minimized.


The CE function enables the output to be turned off and the IC becomes a stand-by mode resulting in greatly reduced power consumption.

APPLICATIONS


- CD-ROM, CD-R/RW drives
- DVD drives
- HDD drives
- MIDs, UMPCs
- Digital still cameras, Video cameras
- Portable AV equipment

FEATURES

| | |
|--|--|
| Maximum Output Current | : 1000mA (TYP.:1200mA limit) (1.2V V_{OUT} 5.0V) |
| Dropout Voltage | : 20mV @ 100mA (V_{OUT} =3.0V) : 60mV@ 300mA (V_{OUT} =3.0V) |
| Operating Voltage Range | : 1.6V ~ 6.0V |
| Output Voltage Range | : 0.8V ~ 5.0V (0.05V increments) |
| Accuracy | : $\pm 1\%$ (V_{OUT} 2.0V) : $\pm 20\text{mV}$ ($V_{OUT} < 2.0\text{V}$) |
| Low Power Consumption | : 8 μA (TYP.) in PS mode : 50 μA (TYP.) in HS mode |
| Operating Temperature | : -40 ~ +85 |
| Thermal Shutdown | : Detect 150 , Release 135 (TYP.) |
| Inrush Current Protection | : 700mA (MAX.) |
| C_L Auto Discharge | : XC6220B/D Series |
| CE Pull-Down Resistor | : XC6220C/D Series |
| Output Capacitor | : Ceramic Capacitor Compatible |
| Packages | : USP-6C, SOT-25, SOT-89-5 |

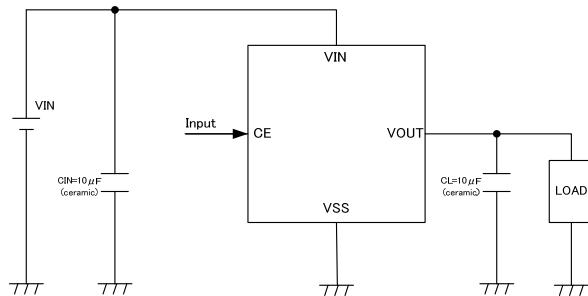TYPICAL APPLICATION CIRCUIT

PIN CONFIGURATION

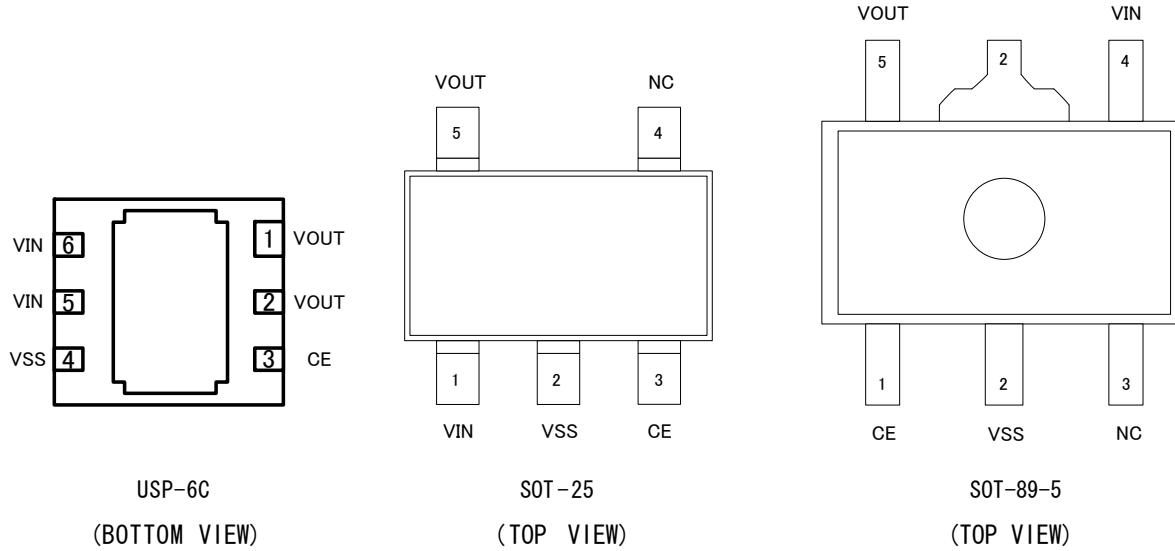

* The No.5 and 6 V_{IN} pins should be connected. The No.1 and 2 pins V_{OUT} pins should be connected. The dissipation pad for the USP-6C package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the V_{SS} (No. 4)

PIN ASSIGNMENT

| PIN NUMBER | | | PIN NAME | FUNCTIONS |
|------------|----------|--------|------------------|----------------|
| SOT-25 | SOT-89-5 | USP-6C | | |
| 3 | 1 | 3 | CE | ON/OFF Control |
| 1 | 4 | 6 & 5 | V _{IN} | Power Input |
| 2 | 2 | 4 | V _{SS} | Ground |
| 5 | 5 | 1 & 2 | V _{OUT} | Output |
| 4 | 3 | - | NC | No connection |

PRODUCT CLASSIFICATION

Selection Guide

Please see the optional setting for C_L discharge and internal CE pull-down.

| PRODUCT NAME | CONDITIONS |
|--------------|---|
| XC6220A | without CE Pull-down resistor, without C_L auto discharge (Semi-custom) |
| XC6220B | without CE Pull-down resistor, with C_L auto discharge (Standard) |
| XC6220C | with CE Pull-down resistor, without C_L auto discharge (Semi-custom) |
| XC6220D | with CE Pull-down resistor, with C_L auto discharge (Semi-custom) |

Ordering Information

XC6220


| DESIGNATOR | DESCRIPTION | SYMBOL | DESCRIPTION |
|------------|------------------------------|--------|---|
| | | A | without CE Pull-down resistor, without C_L discharge (Semi-custom) |
| | | B | without CE Pull-down resistor, with C_L discharge (Standard) |
| | | C | with CE Pull-down resistor, without C_L discharge (Semi-custom) |
| | | D | with CE Pull-down resistor, with C_L discharge (Semi-custom) |
| | Output Voltage | 08~50 | e.g. 3.0V =3, =0 |
| | Output Voltage Accuracy | 1 | Output voltage { . . 0v} (the 2 nd decimal place is "0") :HS Mode Accuracy $\pm 1\%$ ($V_{OUT(T)} - 2.1V$), within 0.02V ($V_{OUT(T)} - 2.0V$) :PS Mode Accuracy $\pm 2\%$ ($V_{OUT(T)} - 2.1V$), within 0.04V ($V_{OUT(T)} - 2.0V$) |
| | | | Output voltage { . . 5v} (the 2 nd decimal place is "5") :HS Mode Accuracy $\pm 1\%$ ($V_{OUT(T)} - 2.05V$), within 0.02V ($V_{OUT(T)} - 1.95V$) :PS Mode Accuracy $\pm 2\%$ ($V_{OUT(T)} - 2.05V$), within 0.04V ($V_{OUT(T)} - 1.95V$) |
| | Packages Taping Type (*1) | MR | SOT-25 |
| | | PR | SOT-89-5 |
| | | ER | USP-6C |

(*1) The device orientation is fixed in its embossed tape pocket.


For reverse orientation, please contact your local Torex sales office or representative.

(Standard orientation: R, Reverse orientation: L)


BLOCK DIAGRAMS

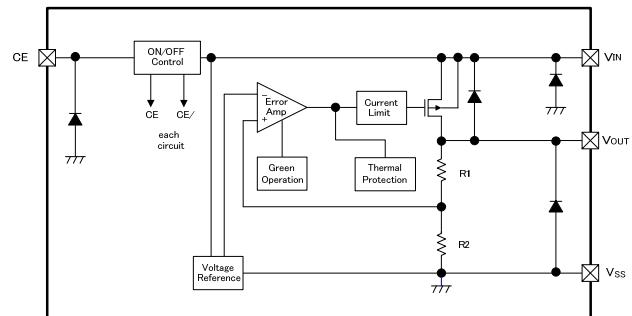


XC6220A Series (Semi-custom)

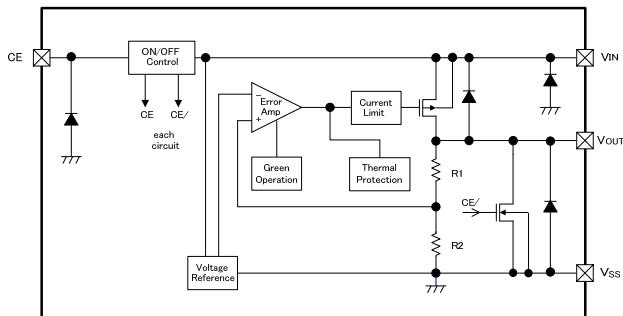

XC6220B Series

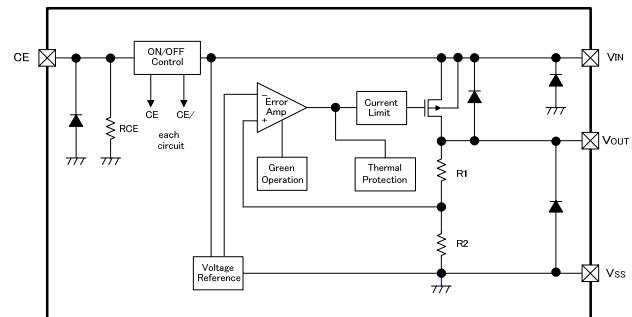

XC6220C Series (Semi-custom)

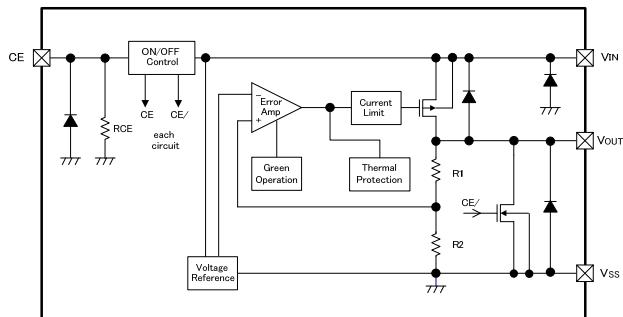

XC6220D Series (Semi-custom)

* Diods inside the circuits are ESD protection diodes and parasitic diodes.

ABSOLUTE MAXIMUM RATINGS

T_a=25

| PARAMETER | SYMBOL | RATINGS | UNITS |
|-------------------------------|------------------|---|-------|
| Input Voltage | V _{IN} | 6.5 | V |
| Output Current ⁽¹⁾ | I _{OUT} | 1400 | mA |
| Output Voltage | V _{OUT} | V _{SS} -0.3 ~ V _{IN} +0.3 | V |
| CE Input Voltage | V _{CE} | V _{SS} -0.3 ~ 6.5 | V |
| Power Dissipation | SOT-25 | 250 | mW |
| | SOT-89-5 | 600 (PCB mounted) ⁽²⁾ | |
| | USP-6C | 500 | |
| | | 1300 (PCB mounted) ⁽²⁾ | |
| Operating Temperature Range | | - 40 ~ + 85 | |
| Storage Temperature Range | | - 55 ~ + 125 | |

*1 Please use within the range of I_{OUT}=Pd / (V_{IN} - V_{OUT})

*2: The power dissipation figure shown is PCB mounted. Please refer to pages 15 ~ 17 for details.

ELECTRICAL CHARACTERISTICS

XC6220A/B/C/D Series

Ta=25

| PARAMETER | SYMBOL | CONDITIONS | MIN. | TYP. | MAX. | UNITS | CIRCUIT |
|--|--|---|-----------------------|--------------------|-----------------------|------------------|---------|
| Output Voltage | $V_{OUT(E)}^{(2)}$ | High Speed Mode (HS) $2.0V \leq V_{OUT(T)} \leq 5.0V$ $V_{CE}=V_{IN}$, $I_{OUT}=30mA$ | $\times 0.99$ | $V_{OUT(T)}^{(3)}$ | $\times 1.01$ | V | ① |
| | | High Speed Mode (HS) $0.8V \leq V_{OUT(T)} \leq 1.95V$ $V_{CE}=V_{IN}$, $I_{OUT}=30mA$ | -0.02 | | +0.02 | | |
| | | Power Save Mode (PS) $2.0V \leq V_{OUT(T)} \leq 5.0V$ $V_{CE}=V_{IN}$, $I_{OUT}=0.1mA$ | $\times 0.98$ | | $\times 1.02$ | | |
| | | Power Save Mode (PS) $0.8V \leq V_{OUT(T)} \leq 1.95V$ $V_{CE}=V_{IN}$, $I_{OUT}=0.1mA$ | -0.04 | | +0.04 | | |
| Output Current | I_{OUTMAX} | High Speed Mode(HS), $V_{CE}=V_{IN}$ $V_{IN}=V_{OUT(T)}+1.0V$ $0.8V \leq V_{OUT(T)} \leq 1.15V$ | 700 | 1200 | - | mA | ① |
| | | High Speed Mode(HS), $V_{CE}=V_{IN}$ $V_{IN}=V_{OUT(T)}+1.0V$ $1.2V \leq V_{OUT(T)} \leq 5.0V$ | 1000 | 1200 | - | | |
| Load Regulation | ΔV_{OUT} | High Speed Mode (HS), $V_{CE}=V_{IN}$ $10mA \leq I_{OUT} \leq 300mA$ | - | 10 | 45 | mV | ① |
| Dropout Voltage1 ^(*) | V_{dif} | High Speed Mode (HS) $I_{OUT}=300mA$, $V_{CE}=V_{IN}$ | see the Voltage Chart | | | mV | ① |
| Dropout Voltage2 ^(*) | V_{dif} | High Speed Mode(HS) $I_{OUT}=1000mA$, $V_{CE}=V_{IN}$ | see the Voltage Chart | | | mV | ① |
| Supply Current 1 | I_{SS1} | High Speed Mode(HS) $V_{IN}=V_{CE}=V_{OUT(T)}+1.0V$ $I_{OUT}=10mA$ (A/B Series) | - | 50 | 108 | μA | ② |
| | | High Speed Mode(HS) $V_{IN}=V_{CE}=V_{OUT(T)}+1.0V$ $I_{OUT}=10mA$ (C/D Series) | - | 50 | see the Voltage Chart | | |
| Supply Current 2 | I_{SS2} | Power Save Mode(PS) $V_{IN}=V_{CE}=V_{OUT(T)}+1.0V$ $I_{OUT}=0.1mA$ | - | 8 | 18 | μA | ② |
| | | Power Save Mode(PS) $V_{IN}=V_{CE}=V_{OUT(T)}+1.0V$ $I_{OUT}=0.1mA$ | - | 8 | see the Voltage Chart | | |
| Stand-by Current | I_{STBY} | $V_{IN}=6.0V$, $V_{CE}=V_{SS}$ | -0.1 | 0.01 | 0.1 | μA | ② |
| Line Regulation | $\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$ | $V_{OUT(T)}+0.5V \leq V_{IN} \leq 6.0V$ $: 1.1V \leq V_{OUT(T)} \leq 5.0V$ High Speed Mode (HS), $V_{CE}=V_{IN}$ $I_{OUT}=100mA$ | - | 0.01 | 0.20 | %/V | ① |
| | | $1.6V \leq V_{IN} \leq 6.0V$ $: 0.8V \leq V_{OUT(T)} \leq 1.05V$ High Speed Mode (HS), $V_{CE}=V_{IN}$ $I_{OUT}=100mA$ | | | | | |
| Input Voltage | V_{IN} | | 1.6 | - | 6.0 | V | |
| Output Voltage Temperature Characteristics | $\Delta V_{OUT}/(\Delta T_a \cdot V_{OUT})$ | High Speed Mode (HS), $V_{CE}=V_{IN}$ $I_{OUT}=30mA$ $-40^{\circ}C \leq T_a \leq 85^{\circ}C$ | - | ± 100 | - | ppm/ $^{\circ}C$ | ① |

ELECTRICAL CHARACTERISTICS (Continued)

| PARAMETER | SYMBOL | CONDITIONS | MIN. | TYP. | MAX. | UNITS | CIRCUIT |
|--|-------------|--|-----------------------|------|------|-------------|---------|
| Ripple Rejection Rate | PSRR | $V_{IN}=5.75V_{DC}+0.5V_{p-pAC}$: $4.75V \leq V_{OUT(T)} \leq 5.0V$ High Speed Mode (HS), $V_{CE}=V_{IN}$ $I_{OUT}=30mA, f=1kHz$ | - | 50 | - | dB | ③ |
| | | $V_{IN}=[V_{OUT(T)}+1.0]$ $V_{DC}+0.5V_{p-pAC}$: $0.85V \leq V_{OUT(T)} \leq 4.7V$ High Speed Mode (HS), $V_{CE}=V_{IN}$ $I_{OUT}=30mA, f=1kHz$ | | | | | |
| | | $V_{IN}=1.85V_{DC}+0.5V_{p-pAC}$: $V_{OUT(T)}=0.8V$ High Speed Mode (HS), $V_{CE}=V_{IN}$ $I_{OUT}=30mA, f=1kHz$ | | | | | |
| Limit Current | I_{LIM} | $V_{CE}=V_{IN}=V_{OUT(T)}+1.0V$ $0.8V \leq V_{OUT(T)} \leq 1.15V$ | 705 | 1200 | - | mA | ① |
| | | $V_{CE}=V_{IN}$ $V_{IN}=V_{OUT(T)}+1.0V$ $1.2V \leq V_{OUT(T)} \leq 5.0V$ | 1005 | 1200 | - | | |
| Short Current | I_{SHORT} | $V_{CE}=V_{IN}$ Short V_{OUT} to V_{SS} level | - | 180 | - | mA | ① |
| PS Switching Current | I_{GOR} | : $1.6V \leq V_{OUT(T)} \leq 5.0V$ $V_{IN}=V_{OUT(T)}+1.0V, V_{CE}=\text{"H"}\text{ Level}$: $0.8V \leq V_{OUT(T)} \leq 1.55V$ $V_{IN}=1.6V, V_{CE}=\text{"H"}\text{ Level}$ $I_{OUT}=\text{heavy to light load}$ | 1.0 | 2.0 | - | mA | ⑤ |
| HS Switching Current | I_{GO} | : $1.6V \leq V_{OUT(T)} \leq 5.0V$ $V_{IN}=V_{OUT(T)}+1.0V, V_{CE}=\text{"H"}\text{ Level}$: $0.8V \leq V_{OUT(T)} \leq 1.55V$ $V_{IN}=1.6V, V_{CE}=\text{"H"}\text{ Level}$ $I_{OUT}=\text{light to heavy load}$ | - | 5.0 | 10 | mA | ⑤ |
| Switch Current Hysteresis Range | I_{GOHYS} | $I_{GOHYS}=I_{GO}-I_{GOR}$ | - | 3.0 | - | mA | ⑤ |
| PS Switching Delay Time | t_{DPS} | $V_{CE}=V_{IN}=V_{OUT(T)}+1.0V,$ (HS/PS Auto-Switching) Time until HS mode is changed-over to PS mode by I_{GOR} . | see the Voltage Chart | | | μs | ⑤ |
| CE High Level Voltage | V_{CEH} | $V_{CE}=V_{IN}$ | 1.2 | - | 6.0 | V | ④ |
| CE Low Level Voltage | V_{CEL} | $V_{CE}=V_{SS}$ | - | - | 0.3 | V | |
| CE High Level Current | I_{CEH} | $V_{CE}=V_{IN}$ (A/B series) | -0.1 | - | 0.1 | μA | ④ |
| | | $V_{CE}=V_{IN}=6.0V$ (C/D series) | - | 9 | 15 | μA | |
| CE Low Level Current | I_{CEL} | $V_{CE}=V_{SS}$ | -0.1 | - | 0.1 | μA | ④ |
| CL Discharge Resistance ^(*) | R_{DCHG} | $V_{IN}=6.0V, V_{OUT}=5.0V, V_{CE}=V_{SS}$ | - | 460 | - | Ω | ① |
| Thermal Shutdown Detect Temperature | T_{TSD} | Junction Temperature | - | 150 | - | $^{\circ}C$ | |
| Thermal Shutdown Release Temperature | T_{TSR} | Junction Temperature | - | 135 | - | $^{\circ}C$ | |
| Inrush Current | I_{RUSH} | $V_{IN}=V_{OUT(T)}+1.0V, C_L=22\mu F$ $V_{CE}=0V \rightarrow V_{OUT(T)}+1.0V$ (Only when rising and within 1ms) | - | - | 700 | mA | ⑥ |

NOTE:

*1: Unless otherwise stated, $V_{IN}=V_{OUT(T)}+1.0V$.*2: $V_{OUT(E)}$ = Effective output voltage (see the voltage chart)(ie. The output voltage when " $V_{OUT(T)}+1.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).*3: $V_{OUT(T)}$: Nominal output voltage*4: $V_{dif}=[V_{IN}^{(*)}-V_{OUT}^{(*)}]$ *5: V_{OUT1} =A voltage equal to 98% of the $V_{OUT(T)}$ when an amply stabilized I_{OUT} { $V_{OUT(T)}+1.0V$ } is input in the HS mode.*6: V_{IN1} =The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

*7: For the XC6220B/D series only. The XC6220A/C series (semi-custom) discharges by resistors R1 and R2 only as shown in the block diagrams.

*8: For the XC6220A/C series, output voltage rises when the IC is in the high temperature stand-by mode.

ELECTRICAL CHARACTERISTICS (Continued)

Voltage Chart 1


| NOMINAL OUTPUT VOLTAGE (V) | OUTPUT VOLTAGE 1 (HS Mode) (V) | | OUTPUT VOLTAGE 2 (PS Mode) (V) | | DROPOUT VOLTAGE 1 Vdif 1 (mV) I _{OUT} =300mA | | DROPOUT VOLTAGE 2 Vdif 2 (mV) I _{OUT} =1000mA | | SUPPLY CURRENT 1 (XC6220C/D) (μ A) | SUPPLY CURRENT 2 (XC6220C/D) (μ A) | PS SWITCH DELAY TIME (μ s) |
|-------------------------------------|---|--------|---|--------|--|------|---|---------|---|---|---|
| | V _{OUT} | | V _{OUT} | | Vdif | | Vdif | | I _{SS1} | I _{SS2} | t _{DPS} |
| | V _{OUT(T)} | MIN. | MAX. | MIN. | MAX. | TYP. | MAX. | MAX. | MAX. | MAX. | MAX. |
| 0.80 | 0.7800 | 0.8200 | 0.7600 | 0.8400 | 400 | 575 | — | 112.500 | 22.500 | 650 | |
| 0.85 | 0.8300 | 0.8700 | 0.8100 | 0.8900 | | | | 112.625 | 22.625 | | |
| 0.90 | 0.8800 | 0.9200 | 0.8600 | 0.9400 | | | | 112.750 | 22.750 | | |
| 0.95 | 0.9300 | 0.9700 | 0.9100 | 0.9900 | | | | 112.875 | 22.875 | | |
| 1.00 | 0.9800 | 1.0200 | 0.9600 | 1.0400 | | 240 | 405 | 113.000 | 23.000 | | |
| 1.05 | 1.0300 | 1.0700 | 1.0100 | 1.0900 | | | | 113.125 | 23.125 | | |
| 1.10 | 1.0800 | 1.1200 | 1.0600 | 1.1400 | | 180 | 305 | 113.250 | 23.250 | | |
| 1.15 | 1.1300 | 1.1700 | 1.1100 | 1.1900 | | | | 113.375 | 23.375 | | |
| 1.20 | 1.1800 | 1.2200 | 1.1600 | 1.2400 | 150 | 215 | 460 | 113.500 | 23.500 | 850 | |
| 1.25 | 1.2300 | 1.2700 | 1.2100 | 1.2900 | | | | 113.625 | 23.625 | | |
| 1.30 | 1.2800 | 1.3200 | 1.2600 | 1.3400 | | | | 113.750 | 23.750 | | |
| 1.35 | 1.3300 | 1.3700 | 1.3100 | 1.3900 | | | | 113.875 | 23.875 | | |
| 1.40 | 1.3800 | 1.4200 | 1.3600 | 1.4400 | | | | 114.000 | 24.000 | | |
| 1.45 | 1.4300 | 1.4700 | 1.4200 | 1.4800 | | | | 114.125 | 24.125 | | |
| 1.50 | 1.4800 | 1.5200 | 1.4700 | 1.5300 | | 100 | 150 | 114.250 | 24.250 | | |
| 1.55 | 1.5300 | 1.5700 | 1.5100 | 1.5900 | | | | 114.375 | 24.375 | | |
| 1.60 | 1.5800 | 1.6200 | 1.5600 | 1.6400 | | | | 114.500 | 24.500 | | |
| 1.65 | 1.6300 | 1.6700 | 1.6100 | 1.6900 | | | | 114.625 | 24.625 | | |
| 1.70 | 1.6800 | 1.7200 | 1.6600 | 1.7400 | | | | 114.750 | 24.750 | | |
| 1.75 | 1.7300 | 1.7700 | 1.7100 | 1.7900 | | | | 114.875 | 24.875 | | |
| 1.80 | 1.7800 | 1.8200 | 1.7600 | 1.8400 | 85 | 130 | 655 | 115.000 | 25.000 | 1200 | |
| 1.85 | 1.8300 | 1.8700 | 1.8100 | 1.8900 | | | | 115.125 | 25.125 | | |
| 1.90 | 1.8800 | 1.9200 | 1.8600 | 1.9400 | | | | 115.250 | 25.250 | | |
| 1.95 | 1.9300 | 1.9700 | 1.9100 | 1.9900 | | | | 115.375 | 25.375 | | |
| 2.00 | 1.9800 | 2.0200 | 1.9600 | 2.0400 | | | | 115.500 | 25.500 | | |
| 2.05 | 2.0295 | 2.0705 | 2.0090 | 2.0910 | | | | 115.625 | 25.625 | | |
| 2.10 | 2.0790 | 2.1210 | 2.0580 | 2.1420 | | | | 115.750 | 25.750 | | |
| 2.15 | 2.1285 | 2.1715 | 2.1070 | 2.1930 | | | | 115.875 | 25.875 | | |
| 2.20 | 2.1780 | 2.2220 | 2.1560 | 2.2440 | | | | 116.000 | 26.000 | | |
| 2.25 | 2.2275 | 2.2725 | 2.2050 | 2.2950 | | | | 116.125 | 26.125 | | |
| 2.30 | 2.2770 | 2.3230 | 2.2540 | 2.3460 | | | | 116.250 | 26.250 | | |
| 2.35 | 2.3265 | 2.3735 | 2.3030 | 2.3970 | | | | 116.375 | 26.375 | | |
| 2.40 | 2.3760 | 2.4240 | 2.3520 | 2.4480 | | | | 116.500 | 26.500 | | |
| 2.45 | 2.4255 | 2.4745 | 2.4010 | 2.4990 | | | | 116.625 | 26.625 | | |
| 2.50 | 2.4750 | 2.5250 | 2.4500 | 2.5500 | 65 | 110 | 655 | 116.750 | 26.750 | 1200 | |
| 2.55 | 2.5245 | 2.5755 | 2.4990 | 2.6010 | | | | 116.875 | 26.875 | | |
| 2.60 | 2.5740 | 2.6260 | 2.5480 | 2.6520 | | | | 117.000 | 27.000 | | |
| 2.65 | 2.6235 | 2.6765 | 2.5970 | 2.7030 | | | | 117.125 | 27.125 | | |
| 2.70 | 2.6730 | 2.7270 | 2.6460 | 2.7540 | | | | 117.250 | 27.250 | | |
| 2.75 | 2.7225 | 2.7775 | 2.6950 | 2.8050 | | | | 117.375 | 27.375 | | |
| 2.80 | 2.7720 | 2.8280 | 2.7440 | 2.8560 | | | | 117.500 | 27.500 | | |
| 2.85 | 2.8215 | 2.8785 | 2.7930 | 2.9070 | | | | 117.625 | 27.625 | | |
| 2.90 | 2.8710 | 2.9290 | 2.8420 | 2.9580 | | | | 117.750 | 27.750 | | |
| 2.95 | 2.9205 | 2.9795 | 2.8910 | 3.0090 | | | | 117.875 | 27.875 | | |

ELECTRICAL CHARACTERISTICS (Continued)

Voltage Chart 2

| NOMINAL OUTPUT VOLTAGE (V) | OUTPUT VOLTAGE (HS Mode) (V) | | OUTPUT VOLTAGE (PS Mode) (V) | | DROPOUT VOLTAGE 1 Vdif 1 (mV) I _{OUT} =300mA | | DROPOUT VOLTAGE 2 Vdif 2 (mV) I _{OUT} =1000mA | | SUPPLY CURRENT 1 (XC6220C/D) (μA) | SUPPLY CURRENT 2 (XC6220C/D) (μA) | PS SWITCH DELAY TIME (μs) |
|-------------------------------------|---------------------------------------|--------|---------------------------------------|--------|--|------|---|------------------|--|--|---------------------------------------|
| | V _{OUT} | | V _{OUT} | | Vdif | | Vdif | I _{SS1} | I _{SS2} | | |
| | V _{OUT(T)} | MIN. | MAX. | MIN. | MAX. | TYP. | MAX. | MAX. | MAX. | | |
| 3.00 | 2.9700 | 3.0300 | 2.9400 | 3.0600 | 60 | 95 | 655 | 118.000 | 28.000 | 1200 | |
| 3.05 | 3.0195 | 3.0805 | 2.9890 | 3.1110 | | | | 118.125 | 28.125 | | |
| 3.10 | 3.0690 | 3.1310 | 3.0380 | 3.1620 | | | | 118.250 | 28.250 | | |
| 3.15 | 3.1185 | 3.1815 | 3.0870 | 3.2130 | | | | 118.375 | 28.375 | | |
| 3.20 | 3.1680 | 3.2320 | 3.1360 | 3.2640 | | | | 118.500 | 28.500 | | |
| 3.25 | 3.2175 | 3.2825 | 3.1850 | 3.3150 | | | | 118.625 | 28.625 | | |
| 3.30 | 3.2670 | 3.3330 | 3.2340 | 3.3660 | | | | 118.750 | 28.750 | | |
| 3.35 | 3.3165 | 3.3835 | 3.2830 | 3.4170 | | | | 118.875 | 28.875 | | |
| 3.40 | 3.3660 | 3.4340 | 3.3320 | 3.4680 | | | | 119.000 | 29.000 | | |
| 3.45 | 3.4155 | 3.4845 | 3.3810 | 3.5190 | | | | 119.125 | 29.125 | | |
| 3.50 | 3.4650 | 3.5350 | 3.4300 | 3.5700 | | | | 119.250 | 29.250 | | |
| 3.55 | 3.5145 | 3.5855 | 3.4790 | 3.6210 | | | | 119.375 | 29.375 | | |
| 3.60 | 3.5640 | 3.6360 | 3.5280 | 3.6720 | | | | 119.500 | 29.500 | | |
| 3.65 | 3.6135 | 3.6865 | 3.5770 | 3.7230 | | | | 119.625 | 29.625 | | |
| 3.70 | 3.6630 | 3.7370 | 3.6260 | 3.7740 | | | | 119.750 | 29.750 | | |
| 3.75 | 3.7125 | 3.7875 | 3.6750 | 3.8250 | | | | 119.875 | 29.875 | | |
| 3.80 | 3.7620 | 3.8380 | 3.7240 | 3.8760 | | | | 120.000 | 30.000 | | |
| 3.85 | 3.8115 | 3.8885 | 3.7730 | 3.9270 | | | | 120.125 | 30.125 | | |
| 3.90 | 3.8610 | 3.9390 | 3.8220 | 3.9780 | | | | 120.250 | 30.250 | | |
| 3.95 | 3.9105 | 3.9895 | 3.8710 | 4.0290 | | | | 120.375 | 30.375 | | |
| 4.00 | 3.9600 | 4.0400 | 3.9200 | 4.0800 | | | | 120.500 | 30.500 | | |
| 4.05 | 4.0095 | 4.0905 | 3.9690 | 4.1310 | 53 | 85 | 53 | 120.625 | 30.625 | 1450 | |
| 4.10 | 4.0590 | 4.1410 | 4.0180 | 4.1820 | | | | 120.750 | 30.750 | | |
| 4.15 | 4.1085 | 4.1915 | 4.0670 | 4.2330 | | | | 120.875 | 30.875 | | |
| 4.20 | 4.1580 | 4.2420 | 4.1160 | 4.2840 | | | | 121.000 | 31.000 | | |
| 4.25 | 4.2075 | 4.2925 | 4.1650 | 4.3350 | | | | 121.125 | 31.125 | | |
| 4.30 | 4.2570 | 4.3430 | 4.2140 | 4.3860 | | | | 121.250 | 31.250 | | |
| 4.35 | 4.3065 | 4.3935 | 4.2630 | 4.4370 | | | | 121.375 | 31.375 | | |
| 4.40 | 4.3560 | 4.4440 | 4.3120 | 4.4880 | | | | 121.500 | 31.500 | | |
| 4.45 | 4.4055 | 4.4945 | 4.3610 | 4.5390 | | | | 121.625 | 31.625 | | |
| 4.50 | 4.4550 | 4.5450 | 4.4100 | 4.5900 | | | | 121.750 | 31.750 | | |
| 4.55 | 4.5045 | 4.5955 | 4.4590 | 4.6410 | | | | 121.875 | 31.875 | | |
| 4.60 | 4.5540 | 4.6460 | 4.5080 | 4.6920 | | | | 122.000 | 32.000 | | |
| 4.65 | 4.6035 | 4.6965 | 4.5570 | 4.7430 | | | | 122.125 | 32.125 | | |
| 4.70 | 4.6530 | 4.7470 | 4.6060 | 4.7940 | | | | 122.250 | 32.250 | | |
| 4.75 | 4.7025 | 4.7975 | 4.6550 | 4.8450 | | | | 122.375 | 32.375 | | |
| 4.80 | 4.7520 | 4.8480 | 4.7040 | 4.8960 | | | | 122.500 | 32.500 | | |
| 4.85 | 4.8015 | 4.8985 | 4.7530 | 4.9470 | | | | 122.625 | 32.625 | | |
| 4.90 | 4.8510 | 4.9490 | 4.8020 | 4.9980 | | | | 122.750 | 32.750 | | |
| 4.95 | 4.9005 | 4.9995 | 4.8510 | 5.0490 | | | | 122.875 | 32.875 | | |
| 5.00 | 4.9500 | 5.0500 | 4.9000 | 5.1000 | | | | 123.000 | 33.000 | | |

OPERATIONAL EXPLANATION

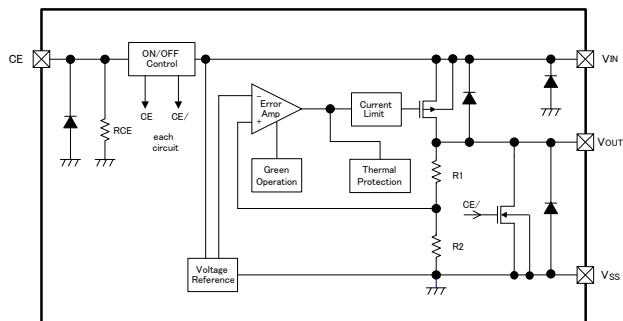

The voltage divided by resistors R1 & R2 is compared with the internal reference voltage by the error amplifier. The P-channel MOSFET which is connected to the V_{OUT} pin is then driven by the subsequent output signal. The output voltage at the V_{OUT} pin is controlled & stabilized by a system of negative feedback. The current limit circuit and short protect circuit operate in relation to the level of output current. The GO function monitors the output current and switches the IC between two operating modes according to the level of output current. Further, the IC's internal circuitry can be shutdown via the CE pin's signal.

<GreenOperation>

The XC6220 series can be set in a fixed high-speed mode or a green operation (GO) mode via a signal to the green operation (GO) pin.

The GO mode enables the IC to switch automatically between the high speed (HS) mode or the power save (PS) mode according to the level of output current. With the HS/PS automatic switching mode (GO mode), the switching point of the HS mode and the PS mode is fixed inside the IC. When the output current becomes I_{GOR}=1.0mA (MIN.) or below, the mode changes automatically to the PS mode after a delay time of hundreds of microseconds. Supply current in light load is greatly reduced. Also when the output current becomes I_{GO} 10mA (MAX.) or more, the mode changes automatically to the HS mode and the IC returns to high speed operation.

<Low ESR capacitor>

The XC6220 series has a built-in phase compensation circuit which means that a stable output voltage is achieved even if the IC is used with low ESR capacitors. In order to ensure stable phase compensation it is recommended that a C_L capacitor is connected as close as possible to the V_{OUT} pin and V_{SS} pin. For a stable power supply, please connect an input capacitor (C_{IN}) between the V_{IN} pin and the V_{SS} pin.

Values required for the phase compensation are shown in the chart below. If a loss of the capacitance happens, the stable phase compensation may not be obtained. Please ensure to use a capacitor which does not depend on bias or temperature too much.

Recommended output capacitor (C_L) Values corresponding to input capacitor (C_{IN})

| OUTPUT VOLTAGE (V) | INPUT CAPACITOR VALUE | | |
|--------------------|-----------------------|--------|--------|
| | 4.7 μF | 10 μF | 22 μF |
| 0.80V~0.95V | x | x | 22 μF |
| 1.00V~1.45V | 47 μF | 47 μF | 22 μF |
| 1.50V~1.75V | 47 μF | 22 μF | 10 μF |
| 1.80V~2.95V | 47 μF | 6.8 μF | 6.8 μF |
| 3.00V~3.50V | 47 μF | 4.7 μF | 4.7 μF |
| 3.55V~5.00V | 47 μF | 10 μF | 6.8 μF |

* No option

<Current Limiter, Short-Circuit Protection>

The XC6220 series includes a fold-back circuit, which aids the operation of the current limiter and circuit protection. When the load current reaches the current limit level, the fold-back circuit operates and output voltage drops. As a result of this drop in output voltage, output current also decreases. When the output pin is shorted, a current of about 180mA flows.

<CE Pin>

The IC's internal circuitry can be shutdown via the signal from the CE pin with the XC6220 series. With the XC6220B/D series, output at the V_{OUT} pin will be pulled down to the V_{SS} level. However, with XC6220A/B series, the C_L auto-discharge resistor is connected in parallel to R1 and R2 while the power supply is applied to the V_{IN} pin. Therefore, the time until the V_{OUT} pin reaches the V_{SS} level is shortened. The output voltage becomes unstable, when the CE pin is open. If this IC is used with the correct output voltage for the CE pin, the logic is fixed and the IC will operate normally. However, with the XC6220C/D series, supply current may increase as a result of through current in the IC's internal circuitry when medium voltage is input.

OPERATIONAL EXPLANATION (Continued)

<CL High Speed Auto-Discharge Function>

The XC6220B/D series can quickly discharge the electric charge at the output capacitor (C_L), when a low signal to the CE pin, which enables the whole IC circuit put into an OFF state, is inputted to the CE pin via the N-channel transistor located between the VOUT pin and the Vss pin (cf. BLOCK DIAGRAM). The C_L auto-discharge resistance value is fixed to 460 ($V_{IN}=6.0V$, $V_{OUT}=5.0V$ at TYP.). The discharge time of the output capacitor (C_L) is set by the C_L auto-discharge resistance (R_{DCHG}) and the output capacitor (C_L). By setting a time constant of the C_L auto-discharge resistance value [R_{DCHG}] and an output capacitor value (C_L) as $(\tau = C \times R_{DCHG})$, the output voltage after discharge via the N channel transistor is calculated by the following formulas.

$$V = V_{OUT} \times e^{-t/\tau}, \quad \text{or } t = \tau \ln(V_{OUT(E)} / V)$$

where

V : Output voltage after discharge


$V_{OUT(E)}$: Output voltage

t : Discharge time


: C_L auto-discharge resistance $R_{DCHG} \times$ Output capacitor (C_L) value C

For the XC6220A/C series, output voltage may rises when in the high stand-by mode. Please note that in that case, the typical characteristics may worse. When the XC6220A/C series is used, please be noted the characteristics shown below.

XC6220A501xx

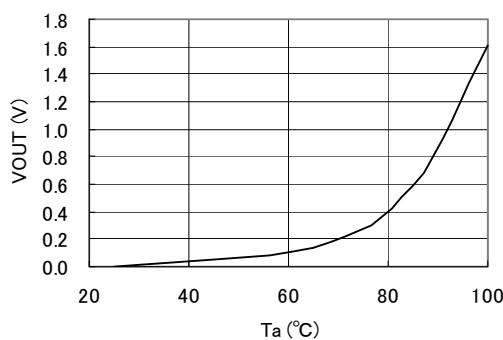

Output Voltage vs. Input Voltage

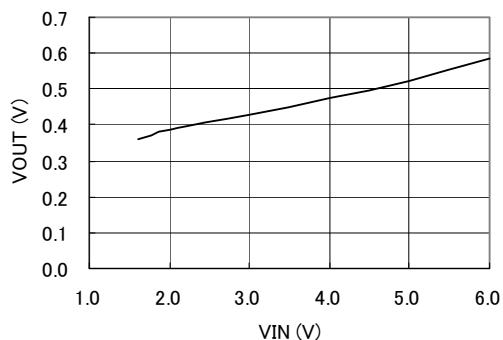

<Thermal Shutdown>

When the junction temperature of the built-in driver transistor reaches the temperature limit level (150 °C TYP.), the thermal shutdown circuit operates and the driver transistor will be turned OFF. The IC resumes its operation when the thermal shutdown function is released and the IC's operation is automatically restored because the junction temperature drops to the level of the thermal shutdown release voltage.

<Inrush Current Protection>

The XC6220 series includes an inrush current protection circuit.

The inrush current protection circuit suppresses inrush current charged to C_L when the IC starts up to 700 mA (MAX.) for approximately 1 ms.


* Please note that the device can not provide the an output current beyond 700 mA for a period of approximately 1 ms after the CE pin goes high.

NOTES ON USE


1. Please use this IC within the stated absolute maximum ratings. The IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current. Please strengthen VIN and Vss wiring in particular.
3. Please wire the input capacitor (C_{IN}) and the output capacitor (C_L) as close to the IC as possible.

TEST CIRCUITS


Circuit 1: Output Voltage, Output Current, Dropout Voltage, Input/Operating Voltage, Line Regulation, Load Regulation, Current Limit, Short Current, CL Discharge Resistance

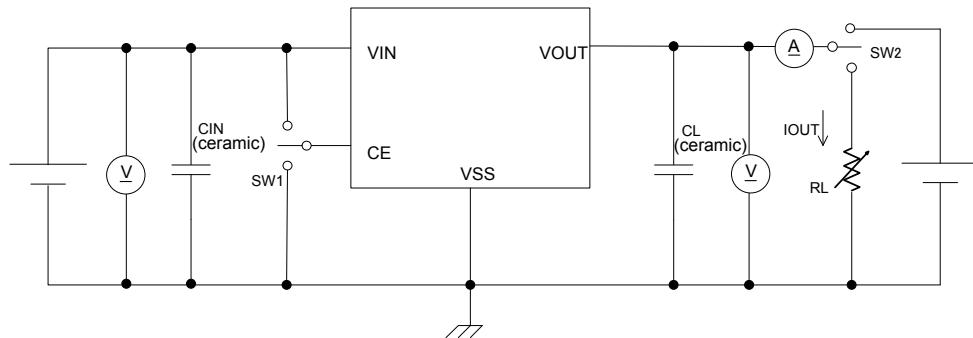

Circuit 2: Supply Current, Stand-by Current

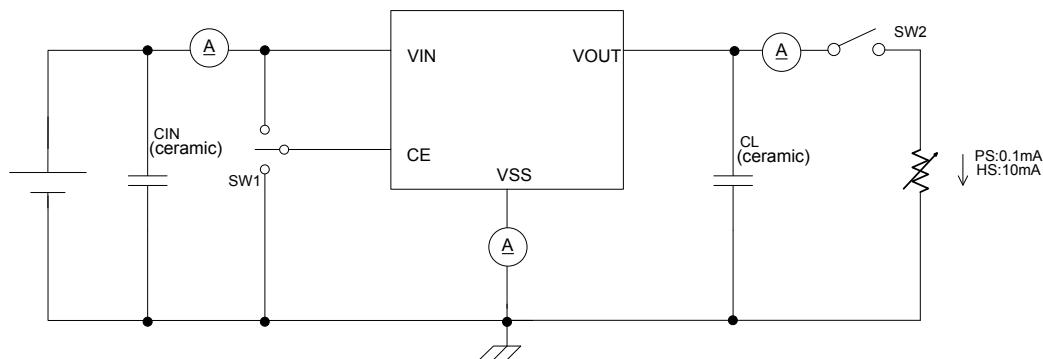


Circuit 3: Ripple Rejection Rate

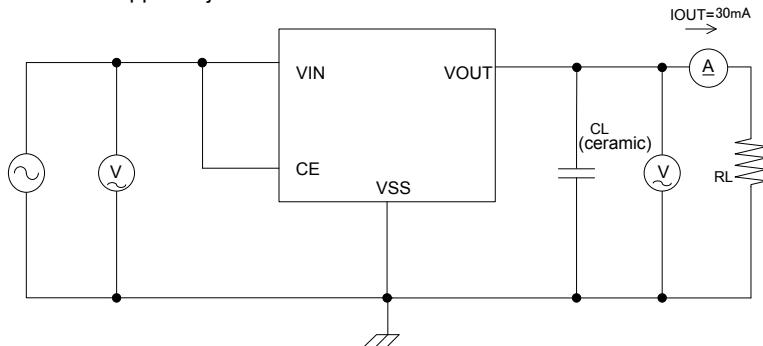


TEST CIRCUITS (Continued)

Circuit 4: CE "H" "L" Level Voltage, CE "H" "L" Level Current

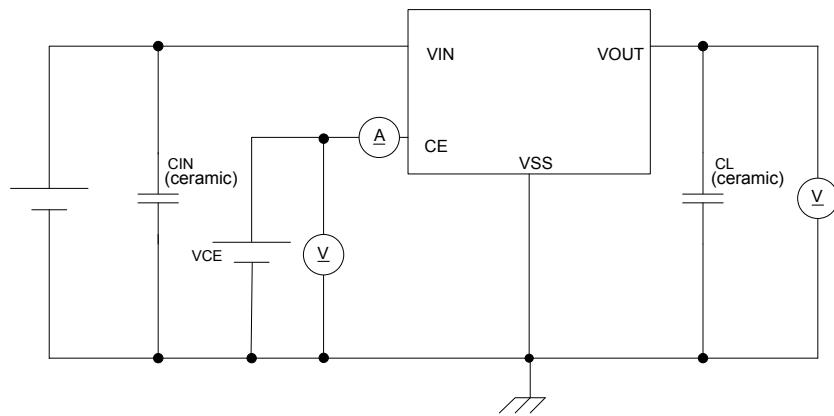


Circuit 5: HS Switching Current, PS Switching Current, Switch Current Hysteresis Range, PS Switching Delay Time

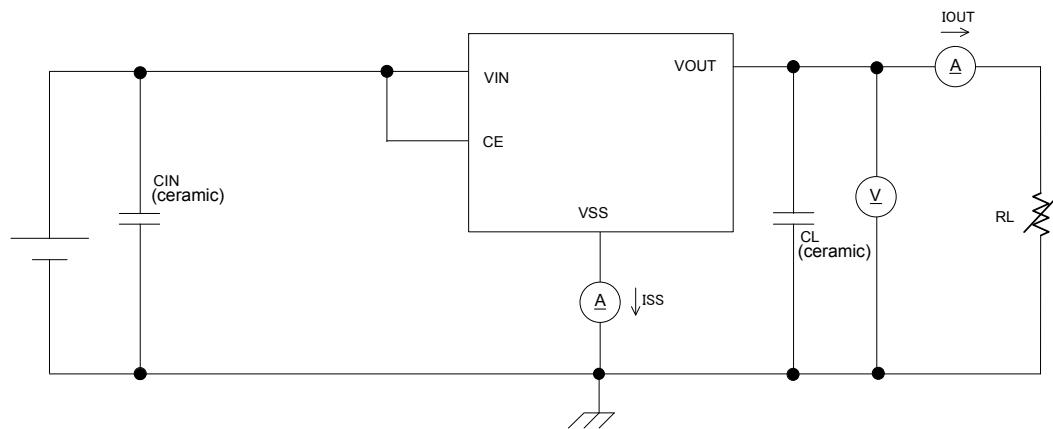


PACKAGING INFORMATION

USP-6C

(unit : mm)





0.6MAX

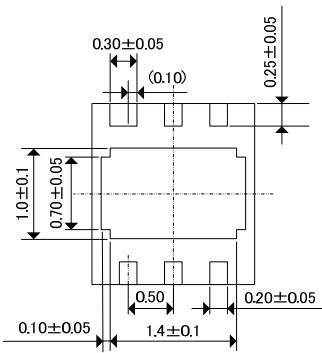



SOT-25

(unit : mm)



SOT-89-5


(unit : mm)

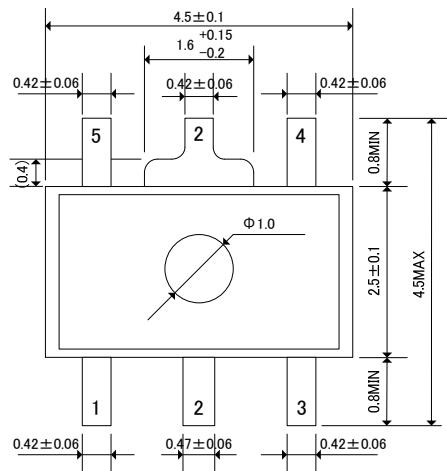


The diagram shows a cross-section of a stepped rectangular profile. The top horizontal segment has a total width of 1.5 ± 0.1 . The vertical segments on the left and right sides each have a height of 1.5 ± 0.1 . The top-left and top-right corners are each labeled with an angle of 8° . A dimension line on the right side indicates a gap of (0.1) between the top edge and the top of the rightmost vertical step.

PACKAGING INFORMATION (Continued)

USP-6C Reference Pattern Layout

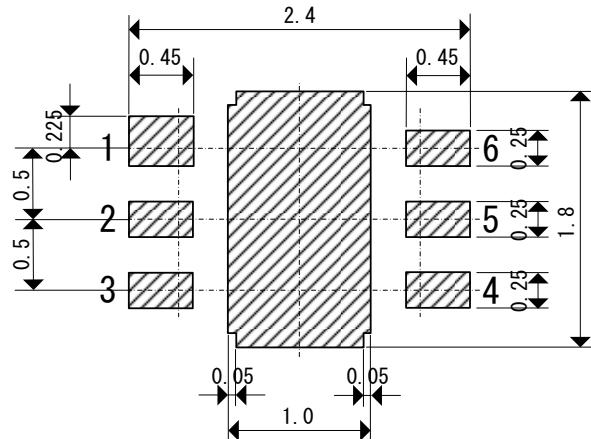

USP-6C Reference Metal Mask Design

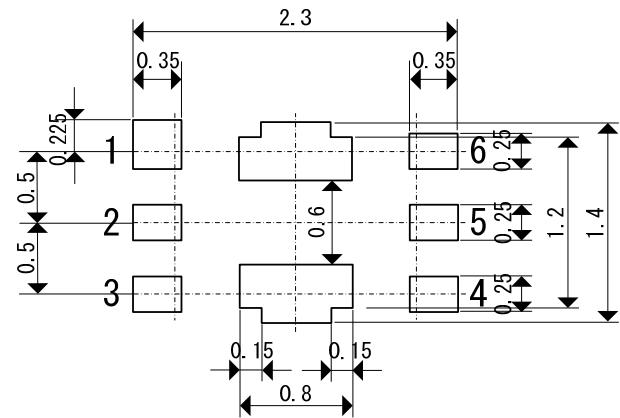

PACKAGING INFORMATION (Continued)

SOT-25 Power Dissipation

Power dissipation data for the SOT-25 is shown in this page.

The value of power dissipation varies with the mount board conditions.

Please use this data as one of reference data taken in the described condition.

1. Measurement Condition (Reference data)

Condition: Mount on a board

Ambient: Natural convection

Soldering: Lead (Pb) free

Board: Dimensions 40 x 40 mm (1600 mm² in one side)

Copper (Cu) traces occupy 50% of the board area


In top and back faces

Package heat-sink is tied to the copper traces
(Board of SOT-26 is used.)

Material: Glass Epoxy (FR-4)

Thickness: 1.6 mm

Through-hole: 4 x 0.8 Diameter

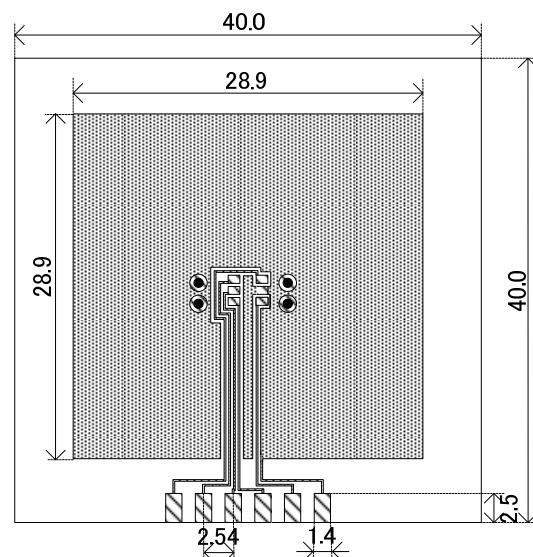


2. Power Dissipation vs. Operating temperature

Evaluation Board (Unit: mm)

Board Mount (T_j max = 125 °C)

| Ambient Temperature (°C) | Power Dissipation P_d (mW) | Thermal Resistance (°C/W) |
|--------------------------|------------------------------|---------------------------|
| 25 | 600 | 166.67 |
| 85 | 240 | |

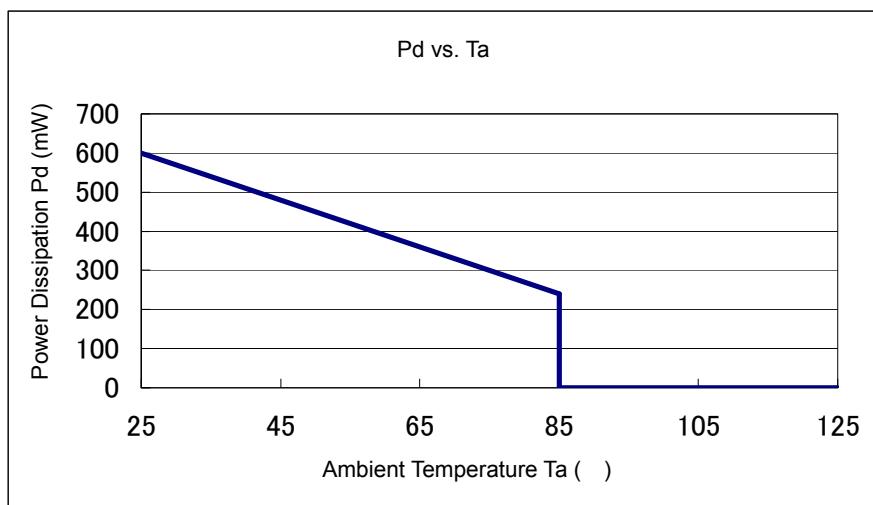

PACKAGING INFORMATION (Continued)

SOT-89-5 Power Dissipation


Power dissipation data for the SOT-89-5 is shown in this page.

The value of power dissipation varies with the mount board conditions.

Please use this data as one of reference data taken in the described condition.

2. Measurement Condition (Reference data)

Condition: Mount on a board
 Ambient: Natural convection
 Soldering: Lead (Pb) free
 Board: Dimensions 40 x 40 mm (1600 mm² in one side)
 Copper (Cu) traces occupy 50% of the board area
 In top and back faces
 Package heat-sink is tied to the copper traces
 Material: Glass Epoxy (FR-4)
 Thickness: 1.6 mm
 Through-hole: 5 x 0.8 Diameter

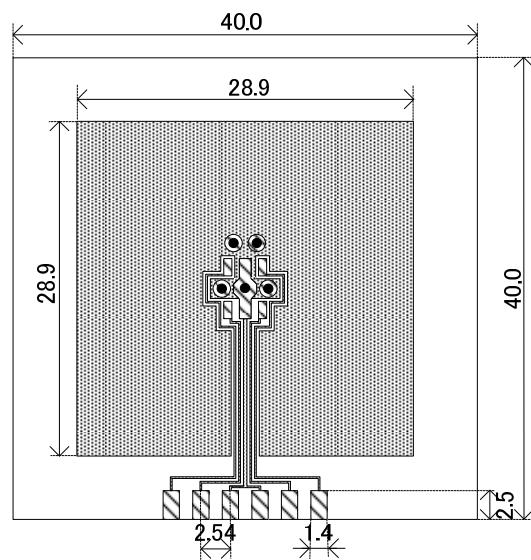


2. Power Dissipation vs. Operating temperature

Evaluation Board (Unit: mm)

Board Mount (T_j max = 125 $^{\circ}$ C)

| Ambient Temperature ($^{\circ}$ C) | Power Dissipation P_d (mW) | Thermal Resistance ($^{\circ}$ C/W) |
|-------------------------------------|------------------------------|--------------------------------------|
| 25 | 1300 | 76.92 |
| 85 | 520 | |

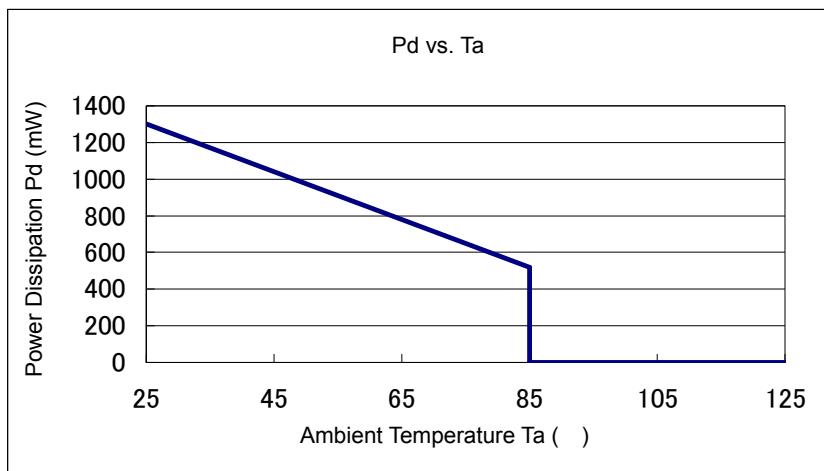

PACKAGING INFORMATION (Continued)

USP-6C Power Dissipation

Power dissipation data for the USP-6C is shown in this page.


The value of power dissipation varies with the mount board conditions.

Please use this data as one of reference data taken in the described condition.

3. Measurement Condition (Reference data)


Condition: Mount on a board
 Ambient: Natural convection
 Soldering: Lead (Pb) free
 Board: Dimensions 40 x 40 mm (1600 mm² in one side)
 Copper (Cu) traces occupy 50% of the board area
 In top and back faces
 Package heat-sink is tied to the copper traces
 Material: Glass Epoxy (FR-4)
 Thickness: 1.6 mm
 Through-hole: 4 x 0.8 Diameter

2. Power Dissipation vs. Operating temperature

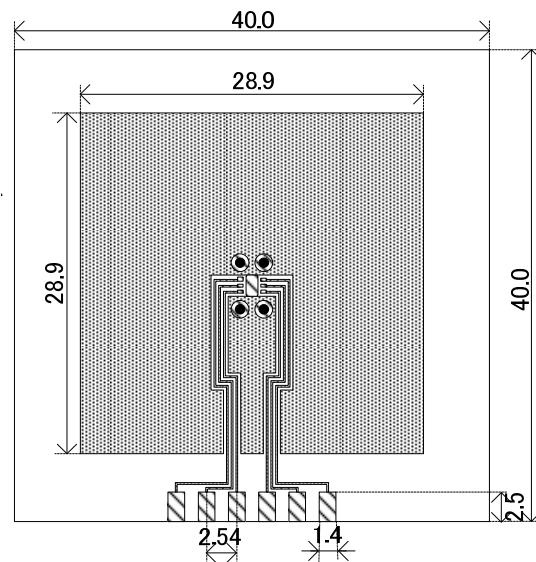

Board Mount (T_j max = 125)

| Ambient Temperature (°C) | Power Dissipation P_d (mW) | Thermal Resistance (°C/W) |
|--------------------------|------------------------------|---------------------------|
| 25 | 1000 | 100.00 |
| 85 | 400 | |

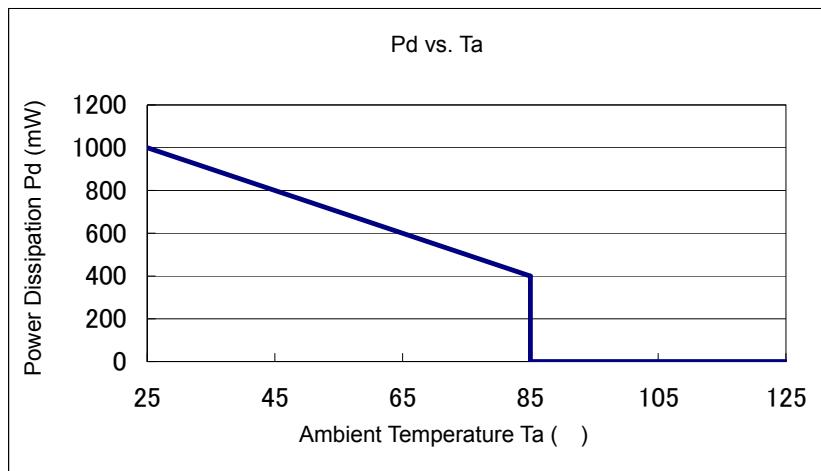


MARKING RULE


SOT25, 89-5, USP6C

Represents product series


SOT25



SOT89-5



USP6C



| MARK | PRODUCT SERIES |
|------|----------------|
| H | XC6220***** |

Represents type of CE, voltage range, and accuracy

| MARK | CE | OUTPUT VOLTAGE RANGE | OUTPUT VOLTAGE ACCURACY | PRODUCT SERIES |
|------|----|----------------------|-------------------------|-----------------------------|
| 0 | A | 0.8 ~ 2.9 | 1 | XC6220A081** ~ XC6220A291** |
| 1 | A | 0.8 ~ 2.9 | B | XC6220A08B** ~ XC6220A29B** |
| 2 | A | 3.0 ~ 5.0 | 1 | XC6220A301** ~ XC6220A501** |
| 3 | A | 3.0 ~ 4.9 | B | XC6220A30B** ~ XC6220A49B** |
| 4 | B | 0.8 ~ 2.9 | 1 | XC6220B081** ~ XC6220B291** |
| 5 | B | 0.8 ~ 2.9 | B | XC6220B08B** ~ XC6220B29B** |
| 6 | B | 3.0 ~ 5.0 | 1 | XC6220B301** ~ XC6220B501** |
| 7 | B | 3.0 ~ 4.9 | B | XC6220B30B** ~ XC6220B49B** |
| 8 | C | 0.8 ~ 2.9 | 1 | XC6220C081** ~ XC6220C291** |
| 9 | C | 0.8 ~ 2.9 | B | XC6220C08B** ~ XC6220C29B** |
| A | C | 3.0 ~ 5.0 | 1 | XC6220C301** ~ XC6220C501** |
| B | C | 3.0 ~ 4.9 | B | XC6220C30B** ~ XC6220C49B** |
| C | D | 0.8 ~ 2.9 | 1 | XC6220D081** ~ XC6220D291** |
| D | D | 0.8 ~ 2.9 | B | XC6220D08B** ~ XC6220D29B** |
| E | D | 3.0 ~ 5.0 | 1 | XC6220D301** ~ XC6220D501** |
| F | D | 3.0 ~ 4.9 | B | XC6220D30B** ~ XC6220D49B** |

* Accuracy "1"…0.1V increments, Accuracy "B"…0.05V increments

Represents output voltage

| MARK | OUTPUT VOLTAGE (V) | MARK | OUTPUT VOLTAGE (V) | MARK | OUTPUT VOLTAGE (V) |
|------|--------------------|------|--------------------|------|--------------------|
| 0 | - | 3.0x | 1.0x | 4.0x | 2.0x 5.0x |
| 1 | - | 3.1x | 1.1x | 4.1x | 2.1x - |
| 2 | - | 3.2x | 1.2x | 4.2x | 2.2x - |
| 3 | - | 3.3x | 1.3x | 4.3x | 2.3x - |
| 4 | - | 3.4x | 1.4x | 4.4x | 2.4x - |
| 5 | - | 3.5x | 1.5x | 4.5x | 2.5x - |
| 6 | - | 3.6x | 1.6x | 4.6x | 2.6x - |
| 7 | - | 3.7x | 1.7x | 4.7x | 2.7x - |
| 8 | 0.8x | 3.8x | 1.8x | 4.8x | 2.8x - |
| 9 | 0.9x | 3.9x | 1.9x | 4.9x | 2.9x - |

, Represents production lot number
01~09, 0A~0Z, 11…9Z, A1~A9, AA…Z9, ZA~ZZ repeated
(G, I, J, O, Q, W excepted)
*No character inversion used.

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.