




5100H1/5 Series Panel Mounted Bi-Color LED Indicator

DESCRIPTION AND FEATURES

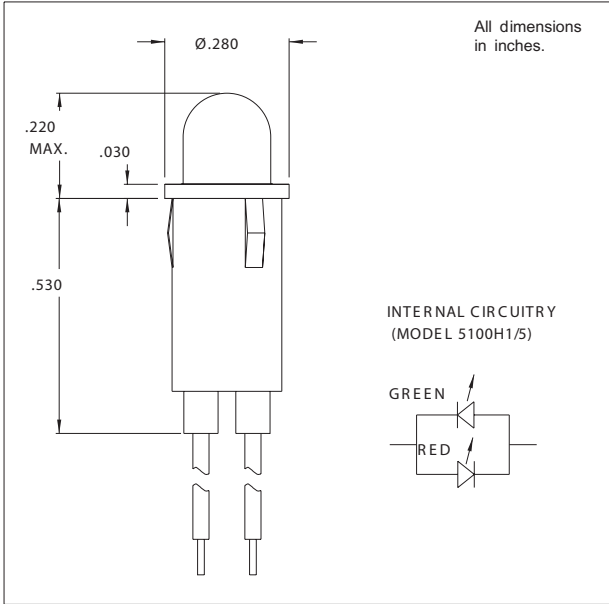

Features

•Will light red or green by reversing polarity.

Mounting: Will snap-fit in $\varnothing.249/.254$ hole in panels
.031/.062 thick

Wire Leads: No. 24 AWG, 6" insulated, bonded strands,
stripped 1/2"

Anode(+): Yellow lead for red light-blue lead anode for
green light

Housing: Black Nylon

ELECTRO-OPTICAL CHARACTERISTICS

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @ 1ms-300pps (A)	Peak Wavelength (nm)
5100H1/5	Red/Green	6	20	10	2.2	2.8	.06	650 Red/565 Green

147 Central Avenue
Hackensack, NJ 07601
Phone: (201) 489-8989
Fax: (201) 489-6911

18703 Dix Toledo Road
Brownstown, MI 48193

Saret Zone Franca, Edificio B
Alajuela Costa Rica

E-mail:sales@chml.com • Web Site: www.chml.com

Chicago Miniature Lighting, LLC reserves the right to make specification revisions that enhance the design and/or performance of the product