

TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic

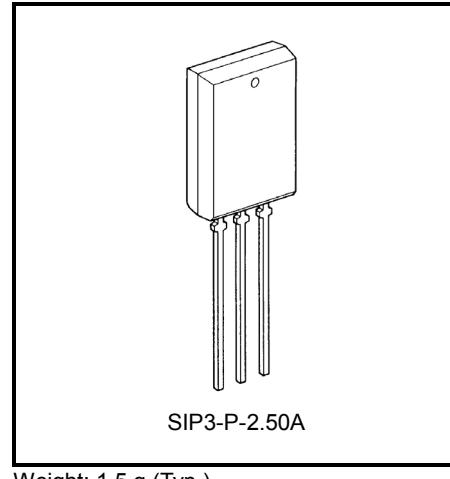

**TA7805SB, TA78057SB, TA7806SB, TA7807SB, TA7808SB, TA7809SB,
TA7810SB, TA7812SB, TA7815SB, TA7818SB, TA7820SB, TA7824SB**

Three-Terminal Positive Voltage Regulators

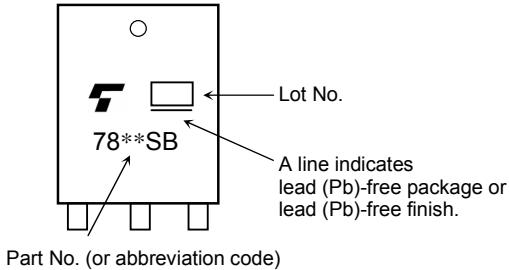
5 V, 5.7 V, 6 V, 7 V, 8 V, 9 V, 10 V, 12 V, 15 V, 18 V, 20 V, 24 V

Features

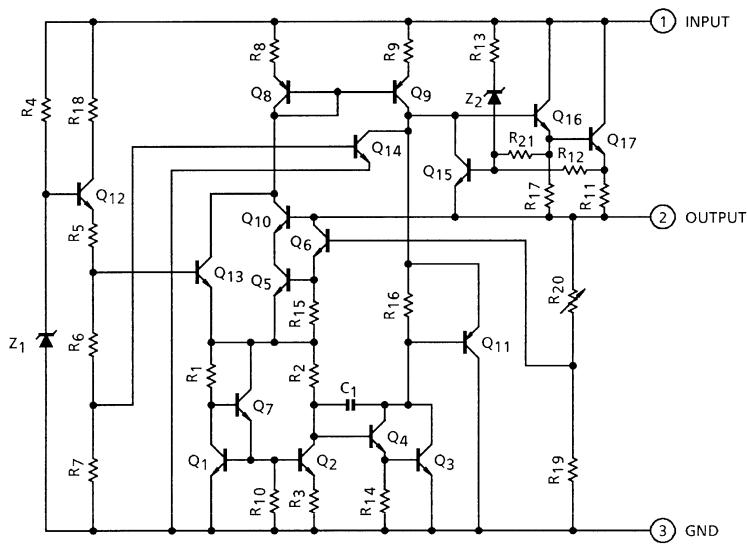
- Suitable for CMOS, TTL, the power supply of other digital ICs
- Internal thermal overload protection
- Internal short circuit current limiting
- Maximum output current of 1 A
- Package in the plastic case TPL (PD: 1.8 W)

Pin Assignment

Weight: 1.5 g (Typ.)

Marking

Note 1: The “**” in the each product number is replaces with the output voltage of each product.

Equivalent Circuit**Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)**

Characteristics		Symbol	Rating	Unit	
Input voltage	TA7805SB	V_{IN}	35	V	
	TA78057SB				
	TA7806SB				
	TA7807SB				
	TA7808SB				
	TA7809SB		40		
	TA7810SB				
	TA7812SB				
	TA7815SB				
	TA7818SB				
Power dissipation	($T_a = 25^\circ\text{C}$)	P_D	1.8	W	
Operating temperature		T_{opr}	-30~85	$^\circ\text{C}$	
Storage temperature		T_{stg}	-55~150	$^\circ\text{C}$	
Junction temperature		T_j	150	$^\circ\text{C}$	
Thermal resistance		$R_{th(j-a)}$	69.4	$^\circ\text{C}/\text{W}$	

Note 2: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc.).

TA7805SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 10\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		4.8	5.0	5.2	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	7.0 V $\leq V_{IN} \leq 25\text{ V}$	—	3	100	mV
				8.0 V $\leq V_{IN} \leq 12\text{ V}$	—	1	50	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	15	100	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	5	50	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	7.0 V $\leq V_{IN} \leq 20\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	4.75	—	5.25	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.2	8.0	mA
Quiescent current change	ΔI_B	1	7.0 V $\leq V_{IN} \leq 25\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.3	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	50	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 8.0 V $\leq V_{IN} \leq 18\text{ V}$ $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		62	78	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	1.6	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-0.6	—	$\text{mV}/^\circ\text{C}$

TA78057SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 10.7\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		5.47	5.7	5.93	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	7.7 V $\leq V_{IN} \leq 25\text{ V}$	—	4	110	mV
				8.7 V $\leq V_{IN} \leq 12.7\text{ V}$	—	2	55	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	15	110	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	5	55	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	7.7 V $\leq V_{IN} \leq 20.7\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	5.42	—	5.98	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.3	8.0	mA
Quiescent current change	ΔI_B	1	7.7 V $\leq V_{IN} \leq 25\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.3	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	55	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 8.8 V $\leq V_{IN} \leq 18.8\text{ V}$, $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		62	77	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	1.5	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-0.7	—	$\text{mV}/^\circ\text{C}$

TA7806SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 11\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		5.75	6.0	6.25	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	8.0 V $\leq V_{IN} \leq 25\text{ V}$	—	4	120	mV
				9 V $\leq V_{IN} \leq 13\text{ V}$	—	2	60	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	15	120	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	5	60	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	8 V $\leq V_{IN} \leq 21\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	5.7	—	6.3	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.3	8.0	mA
Quiescent current change	ΔI_B	1	8.0 V $\leq V_{IN} \leq 25\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.3	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	55	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 9 V $\leq V_{IN} \leq 19\text{ V}$ $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		61	77	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	1.5	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-0.7	—	$\text{mV}/^\circ\text{C}$

TA7807SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 12\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		6.72	7.0	7.28	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	9 V $\leq V_{IN} \leq 25\text{ V}$	—	5	140	mV
				10 V $\leq V_{IN} \leq 14\text{ V}$	—	2	70	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	15	140	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	5	70	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	9 V $\leq V_{IN} \leq 22\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	6.65	—	7.35	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.3	8.0	mA
Quiescent current change	ΔI_B	1	9 V $\leq V_{IN} \leq 25\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.3	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	60	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 10 V $\leq V_{IN} \leq 20\text{ V}$ $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		59	75	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	1.3	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-0.8	—	$\text{mV}/^\circ\text{C}$

TA7808SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 14\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		7.7	8.0	8.3	V
Line regulation	Reg.line	1	$T_j = 25^\circ\text{C}$	10.5 V $\leq V_{IN} \leq 25\text{ V}$	—	6	160	mV
				11 V $\leq V_{IN} \leq 17\text{ V}$	—	2	80	
Load regulation	Reg.load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	12	160	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	4	80	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	10.5 V $\leq V_{IN} \leq 23\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	7.6	—	8.4	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.3	8.0	mA
Quiescent current change	ΔI_B	1	10.5 V $\leq V_{IN} \leq 25\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	70	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 11.5 V $\leq V_{IN} \leq 21.5\text{ V}$ $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		58	74	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	1.1	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-1.0	—	$\text{mV}/^\circ\text{C}$

TA7809SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 15\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		8.64	9.0	9.36	V
Line regulation	Reg.line	1	$T_j = 25^\circ\text{C}$	11.5 V $\leq V_{IN} \leq 26\text{ V}$	—	7	180	mV
				13 V $\leq V_{IN} \leq 19\text{ V}$	—	2.5	90	
Load regulation	Reg.load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	12	180	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	4	90	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	11.5 V $\leq V_{IN} \leq 24\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	8.55	—	9.45	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.3	8.0	mA
Quiescent current change	ΔI_B	1	11.5 V $\leq V_{IN} \leq 26\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	75	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 12.5 V $\leq V_{IN} \leq 22.5\text{ V}$ $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		56	72	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	1.0	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-1.1	—	$\text{mV}/^\circ\text{C}$

TA7810SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 16\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		9.6	10.0	10.4	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	12.5 V $\leq V_{IN} \leq 27\text{ V}$	—	8	200	mV
				14 V $\leq V_{IN} \leq 20\text{ V}$	—	2.5	100	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	12	200	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	4	100	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	12.5 V $\leq V_{IN} \leq 25\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	9.5	—	10.5	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.3	8.0	mA
Quiescent current change	ΔI_B	1	12.5 V $\leq V_{IN} \leq 27\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	80	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 13.5 V $\leq V_{IN} \leq 23.5\text{ V}$ $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		55	72	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	0.9	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-1.3	—	$\text{mV}/^\circ\text{C}$

TA7812SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 19\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		11.5	12.0	12.5	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	14.5 V $\leq V_{IN} \leq 30\text{ V}$	—	10	240	mV
				16 V $\leq V_{IN} \leq 22\text{ V}$	—	3	120	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq 1.4\text{ A}$	—	12	240	mV
				250 mA $\leq I_{OUT} \leq 750\text{ mA}$	—	4	120	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	14.5 V $\leq V_{IN} \leq 27\text{ V}$ 5.0 mA $\leq I_{OUT} \leq 1.0\text{ A}$	11.4	—	12.6	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	$I_{OUT} = 5\text{ mA}$	—	4.3	8.0	mA
Quiescent current change	ΔI_B	1	14.5 V $\leq V_{IN} \leq 30\text{ V}$, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq 100\text{ kHz}$ $I_{OUT} = 50\text{ mA}$		—	90	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 15 V $\leq V_{IN} \leq 25\text{ V}$ $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		55	71	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	0.7	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-1.6	—	$\text{mV}/^\circ\text{C}$

TA7815SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 23\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		14.4	15.0	15.6	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	17.5 V $\leq V_{IN} \leq$ 30 V	—	11	300	mV
				20 V $\leq V_{IN} \leq$ 26 V	—	3	150	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq$ 1.4 A	—	12	300	mV
				250 mA $\leq I_{OUT} \leq$ 750 mA	—	4	150	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	17.5 V $\leq V_{IN} \leq$ 30 V 5.0 mA $\leq I_{OUT} \leq$ 1.0 A	14.25	—	15.75	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 5\text{ mA}$	—	4.4	8.0	mA	
Quiescent current change	ΔI_B	1	17.5 V $\leq V_{IN} \leq$ 30 V, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq$ 100 kHz $I_{OUT} = 50\text{ mA}$		—	110	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 18.5 V $\leq V_{IN} \leq$ 28.5 V $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		54	70	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	0.5	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-2.0	—	$\text{mV}/^\circ\text{C}$

TA7818SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 27\text{ V}$, $I_{OUT} = 500\text{ mA}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

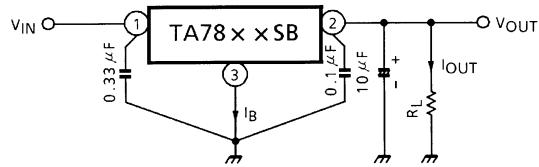
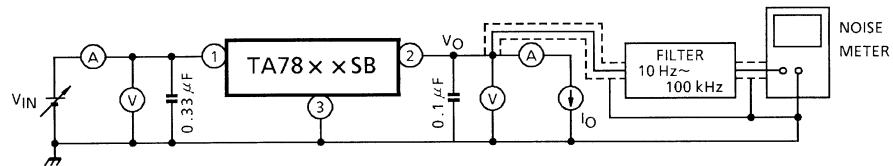
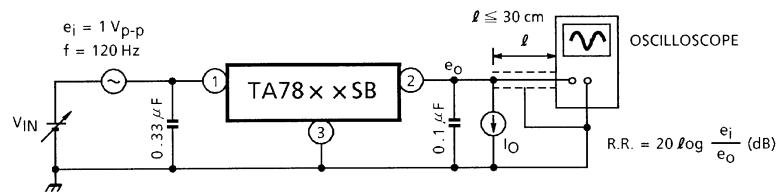
Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$		17.3	18.0	18.7	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	21 V $\leq V_{IN} \leq$ 33 V	—	13	360	mV
				24 V $\leq V_{IN} \leq$ 30 V	—	4	180	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	5 mA $\leq I_{OUT} \leq$ 1.4 A	—	12	360	mV
				250 mA $\leq I_{OUT} \leq$ 750 mA	—	4	180	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	21 V $\leq V_{IN} \leq$ 33 V 5.0 mA $\leq I_{OUT} \leq$ 1.0 A	17.1	—	18.9	V
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 5\text{ mA}$	—	4.5	8.0	mA	
Quiescent current change	ΔI_B	1	21 V $\leq V_{IN} \leq$ 33 V, $I_{OUT} = 5\text{ mA}$, $T_j = 25^\circ\text{C}$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, 10 Hz $\leq f \leq$ 100 kHz $I_{OUT} = 50\text{ mA}$		—	125	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, 22 V $\leq V_{IN} \leq$ 32 V $I_{OUT} = 50\text{ mA}$, $T_j = 25^\circ\text{C}$		52	68	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0\text{ A}$, $T_j = 25^\circ\text{C}$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ\text{C}$		—	0.4	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$		—	-2.5	—	$\text{mV}/^\circ\text{C}$

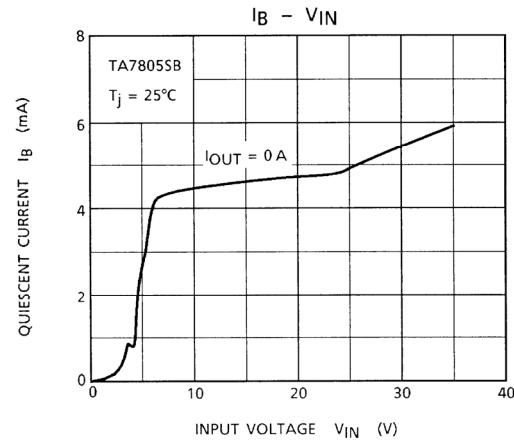
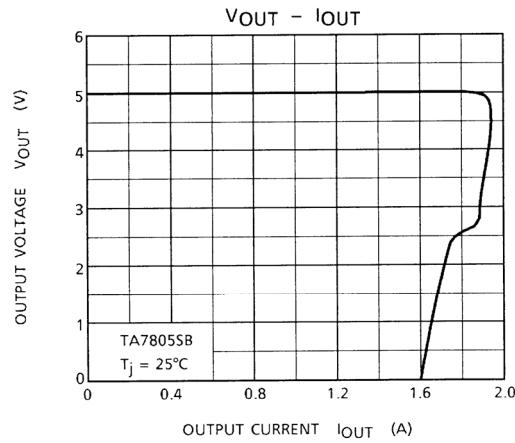
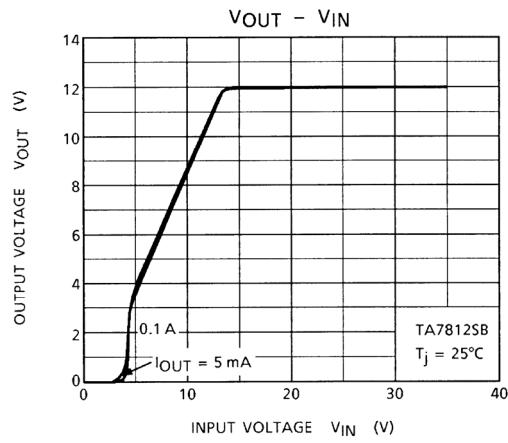
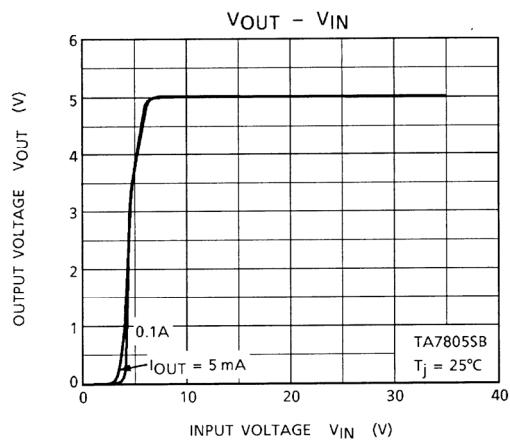
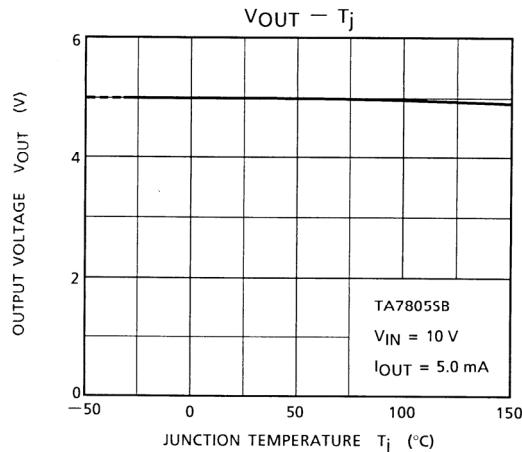
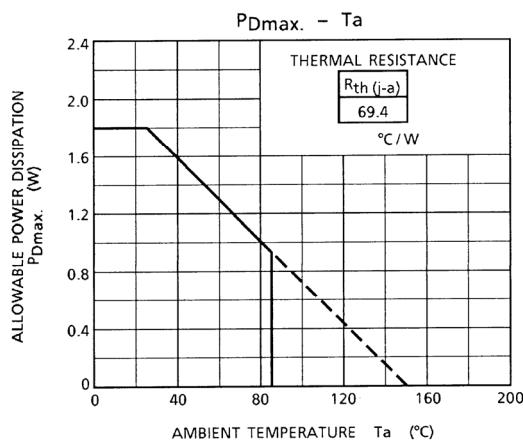
TA7820SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 29 V$, $I_{OUT} = 500 mA$, $0^\circ C \leq T_j \leq 125^\circ C$)

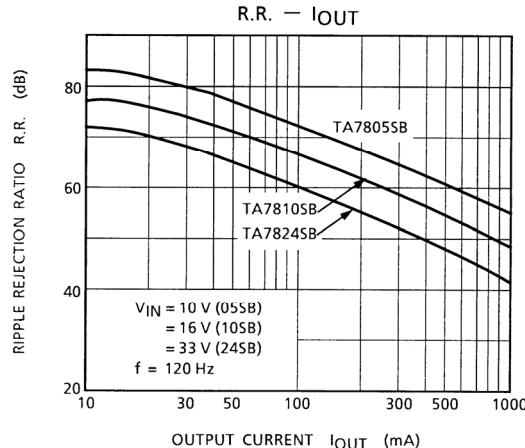
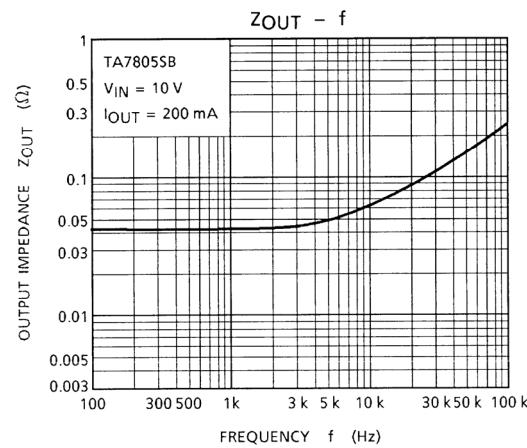
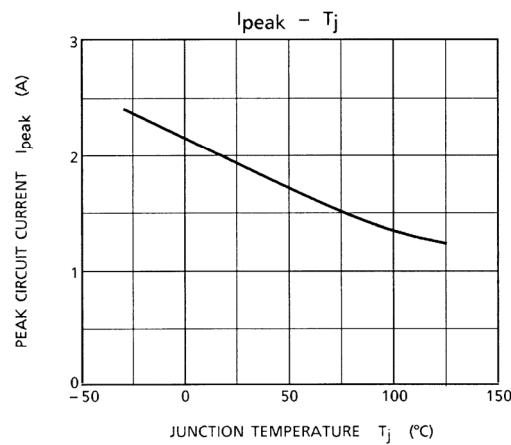
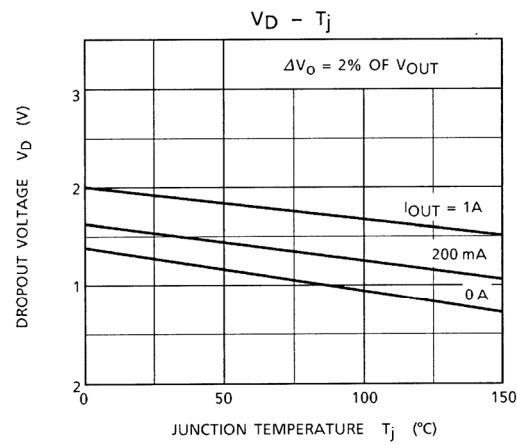
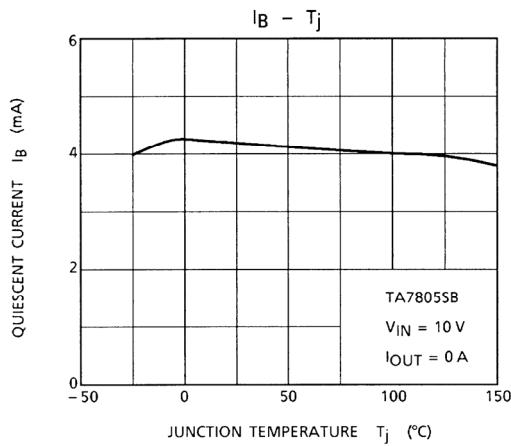
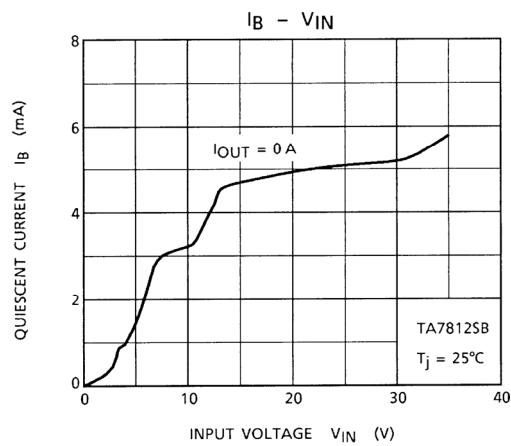
Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ C$, $I_{OUT} = 100 mA$		19.2	20.0	20.8	V
Line regulation	Reg-line	1	$T_j = 25^\circ C$	23 V $\leq V_{IN} \leq 35 V$	—	15	400	mV
				26 V $\leq V_{IN} \leq 32 V$	—	5	200	
Load regulation	Reg-load	1	$T_j = 25^\circ C$	5 mA $\leq I_{OUT} \leq 1.4 A$	—	12	400	mV
				250 mA $\leq I_{OUT} \leq 750 mA$	—	4	200	
Output voltage	V_{OUT}	1	$T_j = 25^\circ C$	23 V $\leq V_{IN} \leq 35 V$ 5.0 mA $\leq I_{OUT} \leq 1.0 A$	19.0	—	21.0	V
Quiescent current	I_B	1	$T_j = 25^\circ C$	$I_{OUT} = 5 mA$	—	4.6	8.0	mA
Quiescent current change	ΔI_B	1	23 V $\leq V_{IN} \leq 35 V$, $I_{OUT} = 5 mA$, $T_j = 25^\circ C$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ C$, 10 Hz $\leq f \leq 100 kHz$ $I_{OUT} = 50 mA$		—	135	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120 Hz$, 24 V $\leq V_{IN} \leq 35 V$ $I_{OUT} = 50 mA$, $T_j = 25^\circ C$		50	66	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0 A$, $T_j = 25^\circ C$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ C$		—	0.4	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5 mA$		—	-3.0	—	$mV/^\circ C$

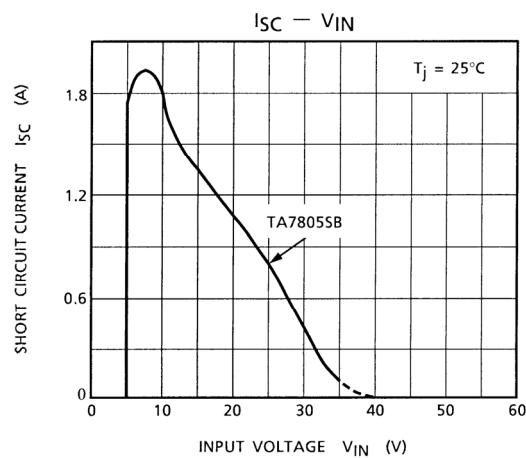
TA7824SB**Electrical Characteristics**(Unless otherwise specified, $V_{IN} = 33 V$, $I_{OUT} = 500 mA$, $0^\circ C \leq T_j \leq 125^\circ C$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ C$, $I_{OUT} = 100 mA$		23.0	24.0	25.0	V
Line regulation	Reg-line	1	$T_j = 25^\circ C$	27 V $\leq V_{IN} \leq 38 V$	—	18	480	mV
				30 V $\leq V_{IN} \leq 36 V$	—	6	240	
Load regulation	Reg-load	1	$T_j = 25^\circ C$	5 mA $\leq I_{OUT} \leq 1.4 A$	—	12	480	mV
				250 mA $\leq I_{OUT} \leq 750 mA$	—	4	240	
Output voltage	V_{OUT}	1	$T_j = 25^\circ C$	27 V $\leq V_{IN} \leq 38 V$ 5.0 mA $\leq I_{OUT} \leq 1.0 A$	22.8	—	25.2	V
Quiescent current	I_B	1	$T_j = 25^\circ C$	$I_{OUT} = 5 mA$	—	4.6	8.0	mA
Quiescent current change	ΔI_B	1	27 V $\leq V_{IN} \leq 38 V$, $I_{OUT} = 5 mA$, $T_j = 25^\circ C$		—	—	1.0	mA
Output noise voltage	V_{NO}	2	$T_a = 25^\circ C$, 10 Hz $\leq f \leq 100 kHz$ $I_{OUT} = 50 mA$		—	150	—	μV_{rms}
Ripple rejection	R.R.	3	$f = 120 Hz$, 28 V $\leq V_{IN} \leq 38 V$ $I_{OUT} = 50 mA$, $T_j = 25^\circ C$		50	66	—	dB
Dropout voltage	V_D	1	$I_{OUT} = 1.0 A$, $T_j = 25^\circ C$		—	2.0	—	V
Short circuit current limit	I_{SC}	1	$T_j = 25^\circ C$		—	0.3	—	A
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5 mA$		—	-3.5	—	$mV/^\circ C$

Test Circuit 1/Standard Application Circuit

Test Circuit 2
V_{NO}

Test Circuit 3
R.R.


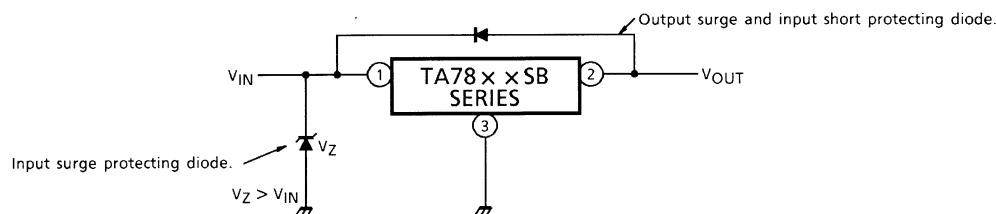




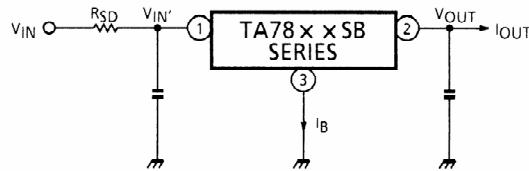


Precautions on Application

- (1) In regard to GND, be careful not to apply a negative voltage to the input/output terminal. Further, special care is necessary in the case of a voltage boost application.
- (2) If a surge voltage exceeding the absolute maximum rating is applied to the input terminal or if a voltage in excess of the input terminal voltage is applied to the output terminal, the circuit may be destroyed.
Particular care is necessary in the case of the latter.
Circuit destruction may also occur if the input terminal shorts to GND in a state of normal operation, causing the output terminal voltage to exceed the input voltage (GND potential) and the electrical charge of the chemical capacitor connected to the output terminal to flow into the input side.
Where these risks exist, take steps such as connecting zener and general silicon diodes to the circuit, as shown in the figure below.



- (3) When the input voltage is too high, the power dissipation of the three-terminal regulator, which is a series regulator, increases, causing the junction temperature to rise. In such a case, it is recommended to reduce the power dissipation, and hence the junction temperature, by inserting a power-limiting resistor RSD in the input terminal.



The power dissipation PD of the IC is expressed in the following equation.

$$P_D = (V_{IN'} - V_{OUT}) \cdot I_{OUT} + V_{IN'} \cdot I_B$$

Reducing V_{IN'} below the lowest voltage necessary for the IC will cause ripple, deterioration in output regulation and, in certain circumstances, parasitic oscillation.

To determine the resistance value of RSD, design with a margin, referring to the following equation.

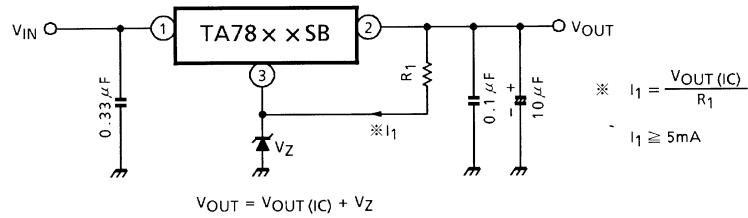
$$R_{SD} < \frac{V_{IN} - V_{IN'}}{I_{OUT} + I_B}$$

- (4) Be sure to connect a capacitor near the input terminal and output terminal between both terminals and GND. The capacitances should be determined experimentally because they depend on PCB patterns. In particular, adequate investigation should be made to ensure there is no problem even in high or low temperatures

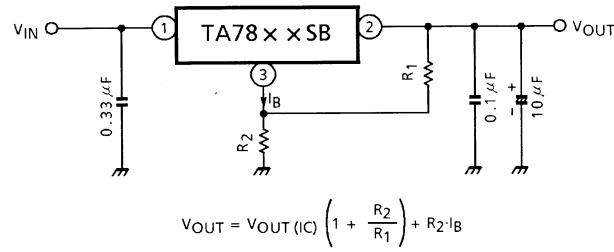
Application Circuits

(1) Voltage boost regulator

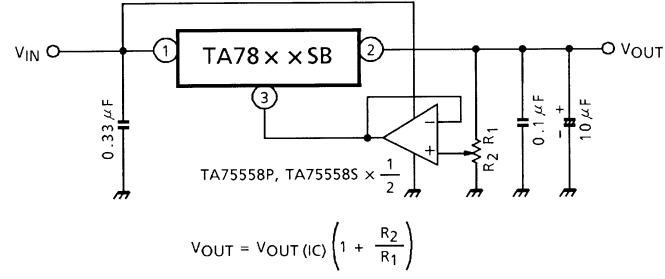
(a) Voltage boost by use of zener diode



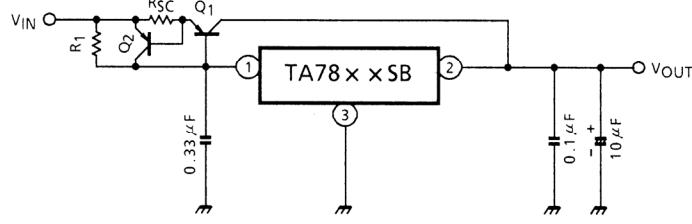
(b) Voltage boost by use of resistor



(c) Adjustable output regulator



(2) Current boost regulator



$$R_1 \leq \frac{V_{BE1}}{I_{B\ MAX}}$$

where,

V_{BE1} : V_{BE} of external transistor Q1.
 $I_{B\ MAX}$: Quiescent current of IC.

$$R_{SC} = \frac{V_{BE2}}{I_{SC}}$$

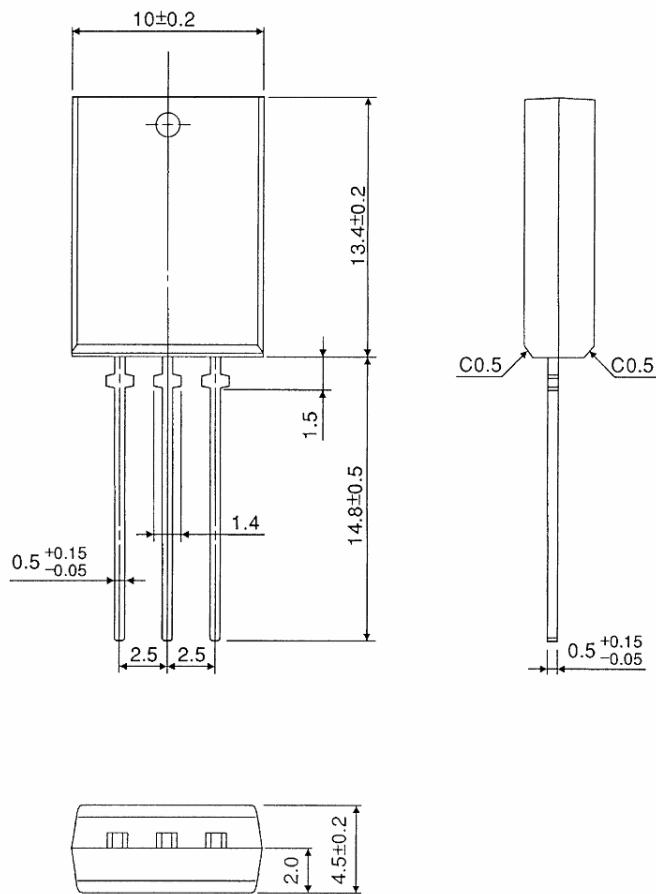
where,

I_{SC} : Short-circuit current.

Package Dimensions

SIP3-P-2.50A

Unit : mm



Weight: 1.5 g (typ.)

RESTRICTIONS ON PRODUCT USE

060925EBA

- The information contained herein is subject to change without notice. 021023_D
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc. 021023_A
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk. 021023_B
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations. 060106_Q
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. 021023_C
- The products described in this document are subject to foreign exchange and foreign trade control laws. 060925_E