


Recommended  
Panel Cut-Out

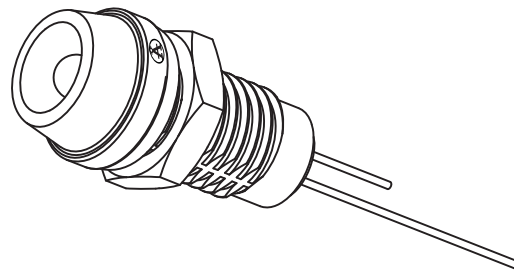

**Material:**

- Waterproof Rate: IP67
- LED Holder: PC+ABS, black
- LED:  $\varnothing 3\text{MM}$ , White
- O-ring: EPDM, black
- Screw Nut: Nylon+GF
- Operating Temperature:  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- For Panel Thickness 6.5MM Max.
- Forward Voltage: White Typ. 3.5V/Max.4V
- Forward Current: White Max. 30mA
- Reverse Voltage: 5V DC
- Luminous Intensity: Min.2,100/Typ.4,000(Mcd)

(QC) Quality Control: Important Dimension to check

Unit: MM $\pm 0.25\text{MM}$

⊕ = Assmann logo



ITEM NO.

**A-LED8-1WAAS-PR7-1-R**

TITLE

Waterproof LED - White color, M8 size connector,  
 $\varnothing 3\text{MM}$ , Plastic housing, Solder pins, IP67 unmated

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved