


Recommended
Panel Cut-Out

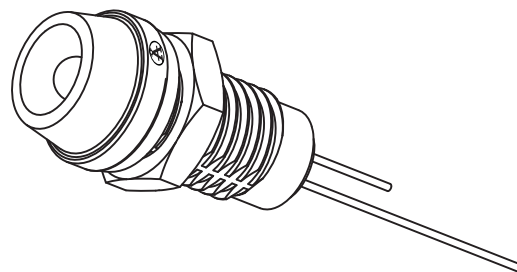

Material:

- Waterproof Rate: IP67
- LED Holder: PC+ABS, black
- LED: \varnothing 3MM, Yellow
- O-ring: EPDM, black
- Screw Nut: Nylon+GF
- Operating Temperature: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- For Panel Thickness 6.5MM Max.
- Forward Voltage: Yellow Typ. 2.0V/Max.2.4V
- Forward Current: Yellow Max. 30mA
- Reverse Voltage: 5V DC
- Luminous Intensity: Min.770/Typ.1,600(Mcd)

(QC) Quality Control: Important Dimension to check

Unit: MM \pm 0.25MM

Ⓜ = Assmann logo



ITEM NO.

A-LED8-1YAAS-PR7-1-R

TITLE

Waterproof LED - Yellow color, M8 size connector,
 \varnothing 3MM, Plastic housing, Solder pins, IP67 unmated

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved