UHF BAND POWER AMPLIFIER APPLICATIONS.

## FEATURES:

- . Output Power :  $P_0=12W(Min.)$   $(f=470MHz, V_{CC}=12.6V, P_1=3W)$
- . 100% Tested for Load Mismatch Stress at All Phase Angles with 30:1 VSWR @  $V_{CC}=12.6V$ ,  $P_i=3W$ , f=470MHz

## MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V <sub>СВО</sub>	35	v
Collector-Emitter Voltage	VCEO	17	V
Emitter-Base Voltage	VEBO	3.5	V
Collector Current	IC	2.8	A
Collector Power Dissipation (Tc=25°C)	PC	30	W
Junction Temperature	Тj	175	°.c
Storage Temperature Range	Tstg	165 ~175	°C

2-Ø3.2±0.1

Ø9.8MAX.

Ø9.8

Unit in mm


Weight: 4g

## ELECTRICAL CHARACTERISTICS (Tc=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I <sub>CBO</sub>	V <sub>CB</sub> =15V, I <sub>E</sub> =0	-	-	1.5	mA
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> =2mA, I <sub>E</sub> =0	35	-	_	V
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =0	17	-	_	V
Emitter-Base Breakdown Voltage	V(BR)EBO	I <sub>E</sub> =0.2mA, I <sub>C</sub> =0	3.5	1	_	V
DC Current Gain	hFE	V <sub>CE</sub> =5V, I <sub>C</sub> =1.5A	10	-	-	-
Collector Output Capacitance	Cob	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1MHz	-	-	45	pF
Output Power	Po	(Fig.)	12	-	-	W
Power Gain	Gpe	V <sub>CC</sub> =12.6V, f=470MHz,	7.7	-	_	dB
Collector Efficiency	η <sub>C</sub>	P <sub>1</sub> =3W	60	-	-	%
Series Equivalent Input Impedance	Z <sub>IN</sub>	V <sub>CC</sub> =12.6V, f=470MHz, P <sub>O</sub> =12W	-	1.5+ j1.3	~	Ω
Series Equivalent Output Impedance	z <sub>out</sub>		-	3.6- jl.8	-	Ω

UNINDERNINGERUNDERNING

Fig. f=470MHz Po TEST CIRCUIT

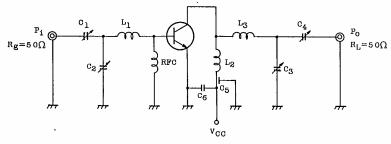


 $C_1, C_3 : 1.5 \sim 5pF$  $C_2, C_1 : 2 \sim 15pF$ 


C5 : 1000pF FEED THROUGH

C6 : 0.01µF

L1,L3 : 5mm×15mm COPPER PLATE

L2 : \$1 SILVER PLATED COPPER WIRE, 10ID, 1/2T RFC : \$1 ENAMEL COATED COPPER WIRE, 3ID, 5T





TOSHIBA CORPORATION ADDRESSAGE DESCRIPTION OF THE PROPERTY OF

This datasheet has been downloaded from:

www. Data sheet Catalog.com

Datasheets for electronic components.