

I²C BUS NTSC 1 CHIP FOR COLOR TV

The KA2163 is a monolithic integrated circuit for VIF, SIF, chroma and deflection circuit of NTSC color TV. The KA2163 also provides audio / video switch and OSD interface. It combines these functions in a 56 SDIP package and the KA2163B also includes I²C bus control functions for automatically adjustment.

FUNCTIONS

- VIF/SIF
- Video
- Chroma
- Deflection
- OSD interface
- I²C bus circuit

FEATURES

VIF CIRCUIT

- PLL type IF demodulation (bus alignment)
- Adjustment free AFT without tank coil
- RF AGC output (delay point : bus alignment)
- Dual time constant fast AGC

SIF CIRCUIT

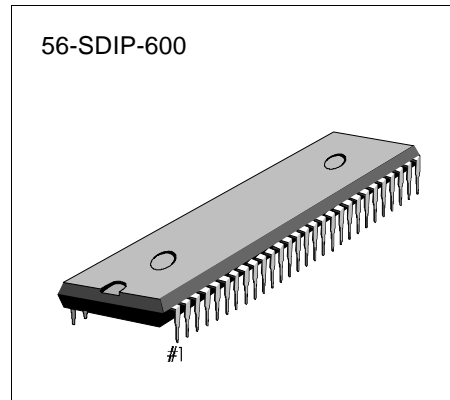
- Inter carrier SIF system
- External sound select switch (bus select)
- Attenuator circuit

VIDEO CIRCUIT

- Black stretcher
- DC Restoration circuit
- D.L aperture compensate circuit (bus control)
- Internal filter auto-adjust circuit (fsc link type)
- Uni-color circuit(bus control)
- Y delay line circuit

CHROMA CIRCUIT

- Color control circuit (bus control)
- Tint control circuit



ORDERING INFORMATION

| Device | Package | Operating Temperature |
|--------|----------|-----------------------|
| KA2163 | 56 -SDIP | -20°C ~ +65°C |

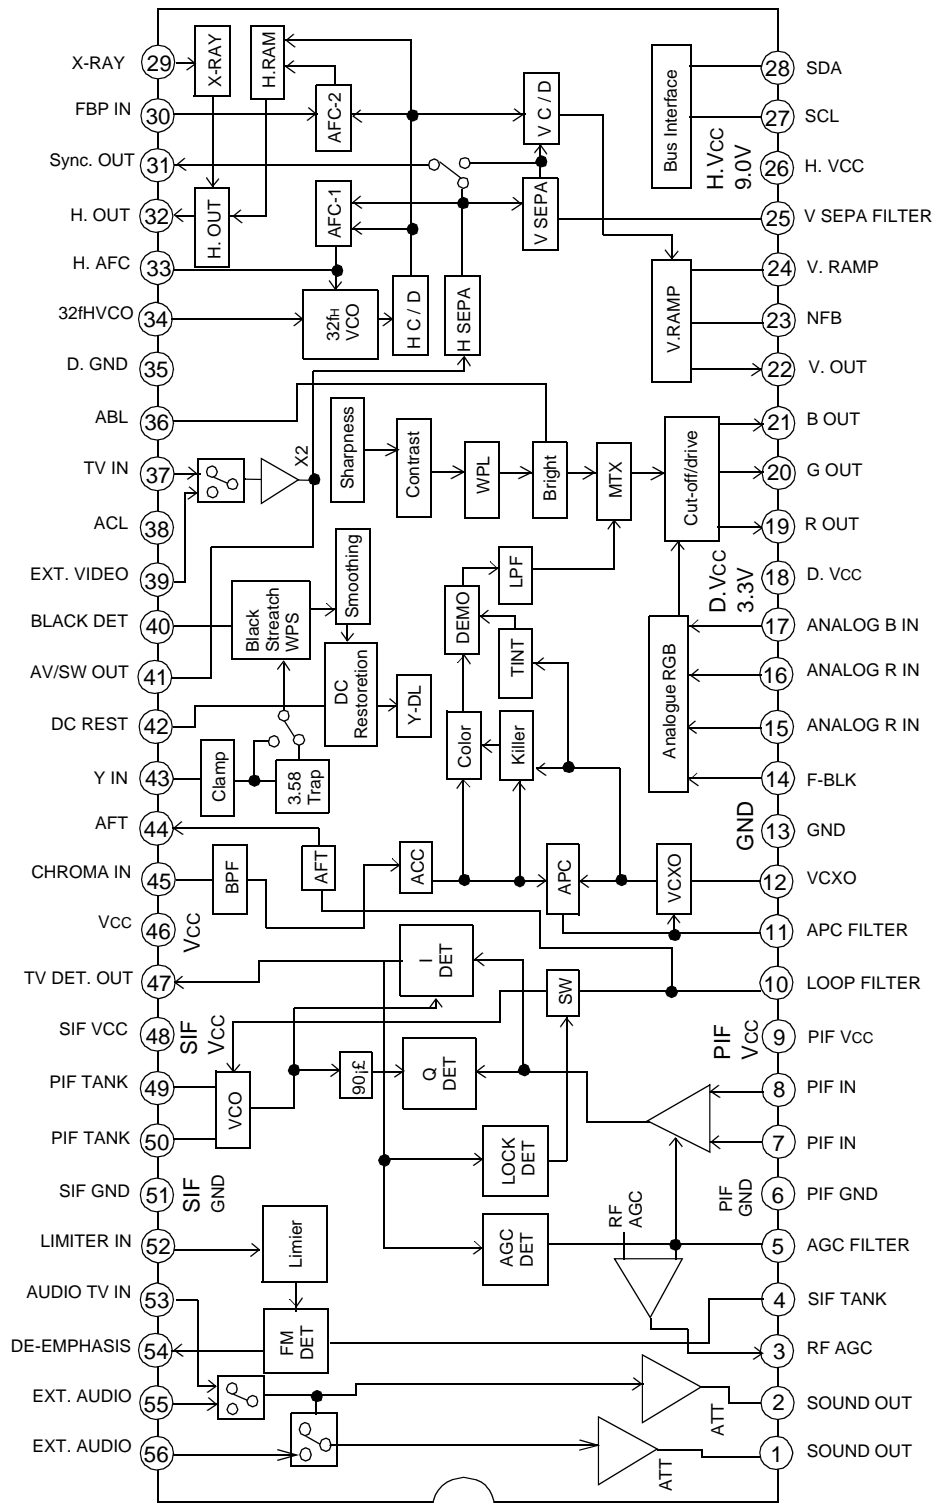
OSD CIRCUIT

- Linear RGB input
- Cut off / Drive adjustment (bus adjustment)
- RGB primary color output

DEFLECTION CIRCUIT

- Auto-slicer type high performance
- Sync. separator circuit
- Adjustment free countdown system
- Sync. separation output
- X-ray protect circuit
- Vertical ramp output
- Dual time constant AFC circuit
- Horizontal and Vertical position bus adjustment
- Vertical amplitude adjustment (bus adjustment)

BLOCK DIAGRAM








TERMINAL FUNCTION

| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|---------|---------------|---|-------------------|
| 1 2 | Sound Output | This terminal is for Sound Output. The maximum flew out current of these terminals is 3.6mA. So, the minimum load resister is 1k Ω . | |
| 3 | RF AGC | This terminal is for RF AGC output. | |
| 4 | SIF Tank Coil | This terminal is for connecting SIF detect tank coil. This terminal is for Sound Mute Switch, too. If this terminal is connected to GND, the sound output is muted. | |
| 5 | AGC Filter | This terminal is for PIF 2nd AGC filter. | |
| 6 | PIF GND | This terminal is for GND of PIF circuit. | — |
| 7 8 | PIF Input | This terminal is for IF input. The typical input value is 90dB μ V. | |





| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|---------|---------------|---|-------------------|
| 9 | PIF Vcc | This terminal is for Vcc of PIF circuit. | — |
| 10 | Loop Filter | This terminal is for PIF PLL loop filter. | |
| 11 | APC Filter | This terminal is for APC filter of fsc oscillation. | |
| 12 | VCXO | This terminal is for X'tal of 3.58MHz VCXO. | |
| 13 | GND | This terminal is for V/C/D GND. | — |
| 14 | Fast Blanking | This terminal is for fast blanking of RGB input. | |

| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|----------------|---------------------|---|-------------------|
| 15 16 17 | Analog RGB Input | These terminals are for RGB signal input. | |
| 18 | Digital Vcc | This terminal is for Vcc of digital circuit. | — |
| 19 20 21 | RGB Output | This terminal is for RGB primary color signal output. | |
| 22 | Vertical Output | This terminal is for vertical pulse output. | |
| 23 24 | NFB, Vertical Ramp. | These terminals are for NFB input and vertical ramp output. | |

| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|----------|----------------------------------|---|-------------------|
| 25 | Vertical Sync. Separation Filter | This terminal is for vertical sync. separation filter. | |
| 26 | H. Vcc | This terminal is for Vcc of horizontal circuit | — |
| 27 28 | SCL, SDA | These terminals are for input and output of I ² C Bus. | |
| 29 | X-RAY | This terminal is for input of X-RAY protect signal. The threshold voltage is 3.5V (Typ.). If applied voltage is more than threshold voltage, the X-RAY protect circuit will make horizontal output a low. | |
| 30 | Fly-back Pulse Input | This terminal is for Fly-back pulse input. The Fly-back pulse is the reference of AFC circuit, gate pulse and so on. The current needs to keep under 1mA. | |
| 31 | Sync. Pulse Output | This terminal is for Sync. pulse output. | |
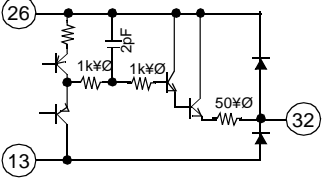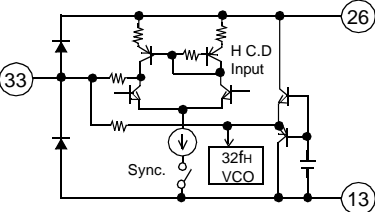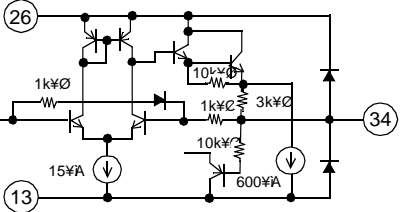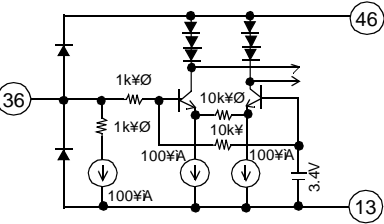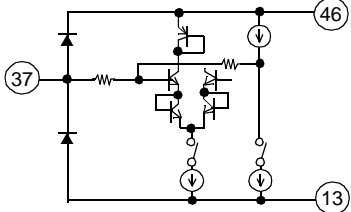
| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|---------|-------------------|---|--|
| 32 | Horizontal Output | This terminal is for horizontal pulse output. |  |
| 33 | H. AFC | This terminal is for horizontal AFC filter. The AFC circuit fits the phase between inputted horizontal sync. signal and horizontal pulse which is made by countdown 32fH. |  |
| 34 | 32fH VCO | This terminal is for connecting ceramic oscillator. That constitutes 32fH (503kHz) oscillation circuit. The CSB503F30 (Murata) is recommended. |  |
| 35 | D. GND | This terminal is for GND of digital circuit. | — |
| 36 | A.B.L | This terminal is for A.B.L circuit. |  |
| 37 | TV Input | This terminal is for input of PIF detected signal. The typical input amplitude is 1.0Vp-p. |  |

| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|---------|----------------------|--|-------------------|
| 38 | A.C.L | This terminal is for ACL circuit | |
| 39 | External Video Input | This terminal is for input of external video signal. | |
| 40 | Black Peak Detection | This terminal is for filter of black peak detection. | |
| 41 | Video Switch Output | This terminal is for output of video switch which selects TV signal or external video. Amplifier Gain is (Min.) 1.7 (Typ.) 1.9, (Max.) 2.1 . | |
| 42 | D.C. Restoration | This terminal is for filter of APL detection. | |
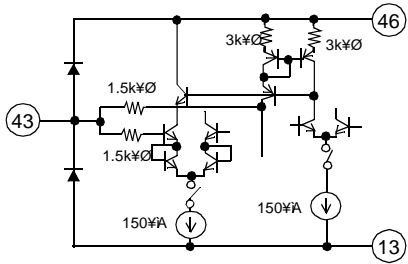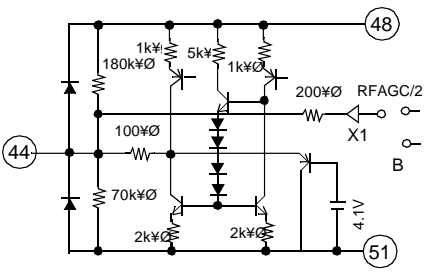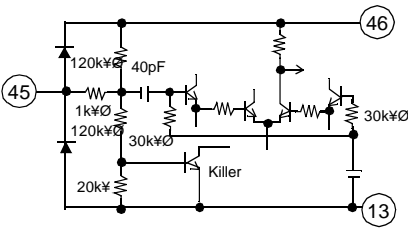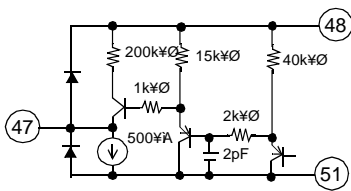
| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT | | | | | | | | | | | | | | | |
|---------|---------------------|---|--|----|--------|---|---|-----|---|---|-------------------|---|---|---|---|---|----------|--|
| 43 | Y Input | This terminal is for Y signal input. The typical input amplitude is 1.0Vp-p. |  | | | | | | | | | | | | | | | |
| 44 | A.F.T. | This terminal is for AFT output. Monitor signal output mode can be selected via Bus. <table border="1" data-bbox="592 808 909 1018"> <thead> <tr> <th>B0</th> <th>B1</th> <th>OUTPUT</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>AFT</td> </tr> <tr> <td>0</td> <td>1</td> <td>TEST purpose only</td> </tr> <tr> <td>1</td> <td>0</td> <td>B</td> </tr> <tr> <td>1</td> <td>1</td> <td>RF AGC/2</td> </tr> </tbody> </table> | B0 | B1 | OUTPUT | 0 | 0 | AFT | 0 | 1 | TEST purpose only | 1 | 0 | B | 1 | 1 | RF AGC/2 |  |
| B0 | B1 | OUTPUT | | | | | | | | | | | | | | | | |
| 0 | 0 | AFT | | | | | | | | | | | | | | | | |
| 0 | 1 | TEST purpose only | | | | | | | | | | | | | | | | |
| 1 | 0 | B | | | | | | | | | | | | | | | | |
| 1 | 1 | RF AGC/2 | | | | | | | | | | | | | | | | |
| 45 | Chroma Input | This terminal is for chrominance signal input. The typical input signal amplitude is 286mVp-p (at burst signal). This IC is to go to test mode with this terminal voltage higher than 4.5V. |  | | | | | | | | | | | | | | | |
| 46 | V / C / D Vcc | This terminal is for Vcc of video, Chroma and Deflection circuit. | — | | | | | | | | | | | | | | | |
| 47 | TV Detection Output | This terminal is for PIF detected signal output. |  | | | | | | | | | | | | | | | |
| 48 | S.I.F. Vcc | This terminal is for Vcc of SIF circuit. | — | | | | | | | | | | | | | | | |

| PIN NO. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|----------|-----------------------|--|-------------------|
| 49 50 | P.I.F. Tank Coil | These terminals are for connecting a tank coil of PIF detection circuit. TOKO Corp. products 292GJAS-7475BS(45.75MHz), 292GJAS-7476BS (58.75MHz) are recommended. | |
| 51 | S.I.F. GND | This terminal is for GND of SIF circuit. | — |
| 52 | Limiter Input | This terminal is for input of SIF limiter amplifier circuit. | |
| 53 | TV Audio Signal Input | This terminal is for input of SIF detected signal. This terminal is connected to pin 54 via capacitor. | |
| 54 | De-emphasis | This terminal for filter of SIF de-emphasis. | |
| 55 56 | External Audio Input | These terminals are for external audio input. | |

Slave address : 88H

| SUB ADDRESS | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | PRESET | | |
|-------------|----------------|------------|--------------------------|------------------|----|----|------|------|--------|------|------|
| 00 | Trap | Color | | | | | | 0000 | 0000 | | |
| 01 | C.Filter | Tint | | | | | | 1100 | 0000 | | |
| 02 | A. SW | Brightness | | | | | | 0000 | 0000 | | |
| 03 | BLK | Uni-color | | | | | | 0000 | 0000 | | |
| 04 | Mute | | Sharpness | | | | | | 0110 | 0000 | |
| 05 | Vertical Phase | | | Horizontal Phase | | | | | | 0001 | 0000 |
| 06 | B0 | B1 | Audio Attenuator | | | | | | 0000 | 0000 | |
| 07 | B2 | B3 | DONT USE (Fix on 100000) | | | | | | 0010 | 0000 | |
| 08 | B4 | V. SW | RF AGC | | | | | | 0000 | 0000 | |
| 09 | AFC | WPL | Vertical Amplitude | | | | | | 0010 | 0000 | |
| 0A | V.Fixed | PIF VCO | | | | | | 0100 | 0000 | | |
| 0B | R Cut OFF | | | | | | 0000 | 0000 | | | |
| 0C | G Cut OFF | | | | | | 0000 | 0000 | | | |
| 0D | B Cut Off | | | | | | 0000 | 0000 | | | |
| 0E | R Gain | | | | | | 0000 | 0000 | | | |
| 0F | B Gain | | | | | | 0000 | 0000 | | | |

| FUNCTION | RANGE (MIN. ~ MAX.) | DEFAULT |
|----------------|--|---------|
| Color | -60 ~ 0dB | -60dB |
| TINT | 0 ~ 42% | 0% |
| Brightness | 1.34 ~ 2.6 ~ 3.86V | 1.34V |
| Uni-Color | -24 ~ 0dB | -24dB |
| Sharpness | -18 ~ 6dB ~ 14dB (4MHz Gain) | 6dB |
| Audio ATT | -85 ~ 6dB | -85dB |
| RF AGC | 65dB ~ 105dB (0.6dB / bit), 000000 : IF Mute | IF Mute |
| Ver. Amplitude | 1.6 ~ 2.4V | Center |
| PIF VCO | 0 ~ 2.2MHz (35kHz / bit) | Center |
| RGB Cut-off | -0.4 ~ 0.4V | -0.4V |
| RB Gain | -3.1 ~ 3.1dB | -3.1dB |

| FUNCTION | RANGE (MIN. ~ MAX.) | DEFAULT |
|---------------------------|---|----------------|
| 3.58 Trap | (0) : On / (1) : Off | On |
| Chroma Filter | (0) : Band Pass Filter / (1) : Take Off Filter | TOF |
| A, V SW | (0) : TV Mode / (1) : EXT. Mode | TV |
| BLK | (0) : BLK On / (1) : BLK Off | On |
| MUTE | (00) : Off / (01) : Y MUTE / (10) : Hout Stop / (11) : Y MUTE + V Stop | (01) |
| H. AFC | (0) : AFC2 Normal / (1) : AFC2 x 3 | (0) |
| WPL | (0) : On / (1) : Off | Off |
| V. Fixed Mode | (0) : Normal / (1) : V Frequency 60Hz Fix | Normal |
| B0, B1 (Monitor) | Pin 44's output is selectable. (00) : AFT Voltage / (01) : Test Mode / (10) : Blue Output / (11) : Half of RF AGC Voltage | AFT Voltage |
| B2, B3, B4 (Test Mode) | Bits for Test Mode. Use this IC with these bits (000). | (000) |

Read Mode

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----|-----|---------|-----|----|--------|--------|-------|
| POR | AFT | IF Lock | AFT | - | V Lock | H Lock | X-RAY |

| FUNCTION | CONTENTS |
|----------------------|---|
| POR (Power On Reset) | (0) : SECOND / (1) : FIRST |
| AFT | Refer to Following Figure |
| IF LOCK | (0) : LOCK OUT / (1) : LOCK IN |
| V LOCK | (0) : LOCK IN / (1) : LOCK OUT Det. Window : 262H ~ 263H |
| H LOCK | (0) : LOCK OUT / (1) : LOCK IN This function is forced to unlock at Vp, so data is valid after 50H. |
| X-RAY | (0) : X-RAY OFF / (1) : X-RAY ON |


Vertical Phase (3bit)

This mode is for changing vertical output timing.
(Vertical picture position is changed 0 ~ 7H as right Table.)

Horizontal Phase (5bit)

This mode is for changing horizontal picture position.
Horizontal output phase is changed 1/4 3% as maximum.

AFT Read Bus




| D7 | D6 | D5 | MODE |
|----|----|----|-----------|
| 0 | 0 | 0 | Reference |
| 0 | 0 | 1 | 1H Delay |
| 0 | 1 | 0 | 2H Delay |
| 0 | 1 | 1 | 3H Delay |
| 1 | 0 | 0 | 4H Delay |
| 1 | 0 | 1 | 5H Delay |
| 1 | 1 | 0 | 6H Delay |
| 1 | 1 | 1 | 7H Delay |

I²C BUS CONTROLLED FORMAT SUMMARY


Bus controlled format of KA2163B is based on I²C Bus Control format of Philips.

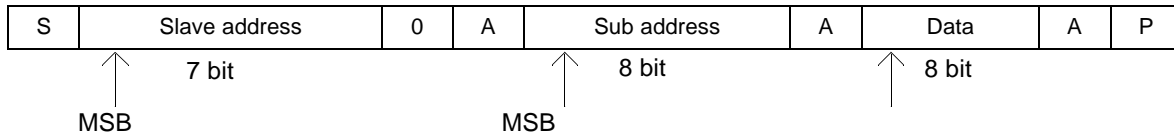Data Transfer Format




S : Start Condition
 P : Stop Condition
 A : Acknowledge

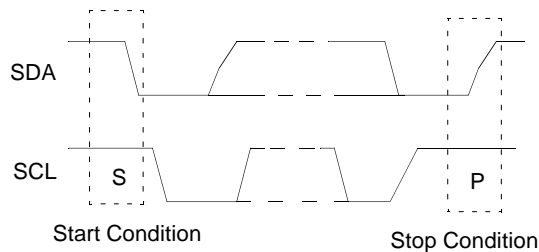
(1) Start and Stop Condition



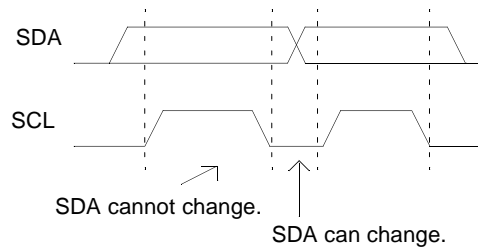(2) Bit Transfer



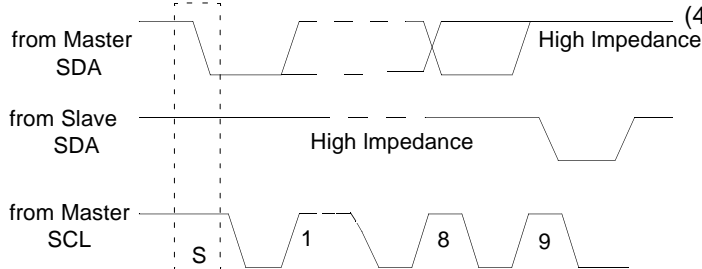(3) Acknowledge



(4) Slave Address

| A6 | A5 | A4 | A3 | A2 | A1 | A0 | R/W |
|----|----|----|----|----|----|----|-----|
| 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |

Purchase of SAMSUNG I²C components conveys a license under the Philips license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

MAXIMUM RATING (Ta = 25°C)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|------------------------|-------------------|-----------------------------------|------------------|
| Power Supply Voltage | V _{cc} | 12 | V |
| Power Dissipation | PD _{max} | 2.19 (Note1) | W |
| Input Terminal Voltage | V _{in} | GND - 0.3 ~ V _{cc} + 0.3 | V |
| Input Signal Amplitude | e _{in} | 4 | V _{p-p} |
| Operating Temperature | T _{opr} | -20 ~ 65 | °C |
| Storage Temperature | T _{stg} | -55 ~ 150 | °C |

(Note 1) When using the device at above Ta = 25°C, decrease the power dissipation by 17.5mW for each increase of 1°C.

(Note 2) As this IC is weak in a surge voltage, handle it with care from being damage.

RECOMMENDED OPERATING CONDITION

| CHARACTERISTIC | SYMBOL | MIN. | TYP. | MAX. | UNIT | REMARKS |
|---|----------------------|------|------|------|-------------------|--|
| PIF Power Supply Voltage | V _{CCP} | 8.5 | 9.0 | 9.5 | V | - |
| SIF Power Supply Voltage | V _{CCS} | 8.5 | 9.0 | 9.5 | V | - |
| V/C/D Power Supply Voltage | V _{CCV} | 8.5 | 9.0 | 9.5 | V | - |
| H.Vcc Power Supply Voltage | H.V _{CC} | 8.5 | 9.0 | 9.5 | V | - |
| D.Vcc Power Supply Voltage | D.V _{CC} | 2.7 | 3.3 | 3.8 | V | - |
| TV External Video Input Level | V _{in37/39} | - | 1.0 | - | V _{p-p} | including sync. |
| Standard Video Input Level | V _{in43} | - | 1.0 | - | V _{p-p} | including sync. |
| Standard Chroma Input Level | V _{in45} | - | 286 | - | mV _{p-p} | at burst signal |
| FBP Width | TFBP | 10 | 12 | - | µs | V _{th} = 1.4V, V _{cc} - 1.4V |
| FBP Input Flow in Current | IFBP _{max} | - | - | 2 | mA | - |
| PIF Output Load Resister | ROP | 2 | 8.2 | - | kΩ | - |
| SIF Output Load Resister | ROS | 1 | 8.2 | - | kΩ | - |
| RGB Output Load Resister | RORGB | - | 1.8 | - | kΩ | - |
| Horizontal Output Load Resistor | RHOUT | 330 | 800 | - | Ω | maximum 10mA |
| Vertical Output Load Resister | RVOUT | 4.1 | 5.7 | - | kΩ | - |
| Sync. Separation Output Flow In Current | I _{syncmax} | - | - | 1 | mA | - |

ELECTRICAL CHARACTERISTICS

DC CHARACTERISTICS (Unless Otherwise Specified, V_{CC} = 9V, Ta = 25°C)

| PIN No. | CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------|----------------------|-----------------|----------------|------|------|------|------|
| 2 | Sound Output | V ₂ | - | 3.20 | 3.70 | 4.20 | V |
| 3 | RF AGC | V ₃ | - | - | 0.00 | 0.50 | V |
| 4 | SIF TANK | V ₄ | - | - | - | - | V |
| 5 | AGC Filter | V ₅ | - | 7.00 | 7.50 | 8.00 | V |
| 6 | PIF GND | GND | - | - | 0.00 | - | V |
| 7 | PIF Input | V ₇ | - | 1.50 | 2.00 | 2.50 | V |
| 8 | PIF Input | V ₈ | - | - | 0.00 | 0.50 | V |
| 9 | PIF Vcc | V _{CC} | - | - | 9.00 | - | V |
| 10 | Loop Filter | V ₁₀ | - | - | 4.50 | - | V |
| 11 | APC Filter | V ₁₁ | - | 6.00 | 6.50 | 7.00 | V |
| 12 | VCXO | V ₁₂ | - | 5.30 | 5.80 | 6.30 | V |
| 13 | V/C/D GND | GND | - | - | 0.00 | - | V |
| 14 | F-BLK | V ₁₄ | - | - | 0.00 | - | V |
| 15 | Analog R Input | V ₁₅ | - | 4.40 | 4.90 | 5.40 | V |
| 16 | Analog G Input | V ₁₆ | - | 4.40 | 4.90 | 5.40 | V |
| 17 | Analog B Input | V ₁₇ | - | 4.40 | 4.90 | 5.40 | V |
| 18 | D.Vcc | V _{CC} | - | - | 3.30 | - | V |
| 19 | R Output | V ₁₉ | BRT, C. O Cent | 2.40 | 2.70 | 2.90 | V |
| 20 | G Output | V ₂₀ | BRT, C. O Cent | 2.40 | 2.70 | 2.90 | V |
| 21 | B Output | V ₂₁ | BRT, C. O Cent | 2.40 | 2.70 | 2.90 | V |
| 22 | V out | V ₂₂ | - | - | - | - | - |
| 23 | NFB | V ₂₃ | - | - | - | - | - |
| 24 | V. Ramp | V ₂₄ | - | - | - | - | - |
| 25 | V SEPA | V ₂₅ | - | 5.80 | 6.30 | 6.80 | V |
| 26 | H. V _{CC} | V ₂₆ | - | - | 9.00 | - | V |
| 27 | SCL | V ₂₇ | - | 4.50 | 5.00 | 5.50 | V |
| 28 | SDA | V ₂₈ | - | 4.50 | 5.00 | 5.50 | V |
| 29 | X-RAY | V ₂₉ | - | - | 0.00 | - | V |
| 30 | FBP Input | V ₃₀ | - | - | - | - | - |
| 31 | Sync. Output | V ₃₁ | - | - | - | - | - |
| 32 | H. Output | V ₃₂ | - | - | - | - | - |
| 33 | H. AFC | V ₃₃ | - | 7.00 | 7.50 | 8.00 | V |
| 34 | 32f _H VCO | V ₃₄ | - | 5.50 | 6.00 | 6.50 | V |
| 35 | D. GND | GND | - | - | 0.00 | - | V |
| 36 | ABL | V ₃₆ | BRT, COL Cent | 2.90 | 3.40 | 3.90 | V |
| 37 | TV Input | V ₃₇ | - | 2.90 | 3.00 | 3.90 | V |
| 38 | ACL | V ₃₈ | BRT, COL Cent | 2.90 | 3.40 | 3.90 | V |

| PIN NO. | CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX | UNIT |
|---------|------------------|-----------------|----------------|------|------|------|------|
| 39 | EXT. Video Input | V ₃₉ | - | 1.10 | 1.60 | 2.10 | V |
| 40 | Black DET | V ₄₀ | - | 6.10 | 6.60 | 7.10 | V |
| 41 | AV/SW Output | V ₄₁ | - | 1.80 | 2.30 | 2.80 | V |
| 42 | DC Rest | V ₄₂ | - | 5.50 | 6.00 | 6.50 | V |
| 43 | Y Input | V ₄₃ | - | 4.00 | 4.50 | 5.00 | V |
| 44 | AFT | V ₄₄ | - | 2.00 | 2.50 | 3.00 | V |
| 45 | Chroma Input | V ₄₅ | - | 1.60 | 1.85 | 2.10 | V |
| 46 | V / C / D Vcc | V ₄₆ | - | - | 9.00 | - | V |
| 47 | TV DET. Output | V ₄₇ | - | 4.70 | 5.20 | 5.70 | V |
| 48 | SIF Vcc | V ₄₈ | - | - | 9.00 | - | V |
| 49 | PIF Tank | V ₄₉ | - | - | - | - | V |
| 50 | PIF Tank | V ₅₀ | - | - | - | - | V |
| 51 | SIF GND | Vcc | - | - | 0.00 | - | V |
| 52 | Limiter Input | V ₅₂ | - | - | 0.00 | 0.50 | V |
| 53 | Audio TV Input | V ₅₃ | - | 2.50 | 3.00 | 3.50 | V |
| 54 | De-emphasis | V ₅₄ | Pin4 GND | 4.00 | 4.50 | 5.00 | V |
| 55 | EXT. Audio Input | V ₅₅ | - | 2.50 | 3.00 | 3.50 | V |

Current Consumption

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------------------|------------------|----------------|------|------|------|------|
| IF Power Supply Current | I _{cci} | - | 32.8 | 46 | 52.0 | mA |
| V/C/D Power Supply Current | I _{ccv} | - | 52.7 | 71 | 76.8 | mA |
| H.Vcc Power Supply Current | I _{ccH} | - | 10.7 | 14 | 18.4 | mA |
| D.Vcc Power Supply Current | I _{ccd} | - | 5.2 | 10 | 11.6 | mA |

AC CHARACTERISTICS (Unless Otherwise Specified, V_{CC} = 9V, T_a = 25°C)

PIF

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-------------------------------------|----------------------|----------------|-----|-----|-----|-------|
| Video Detected Output level | V ₀₁ | Note 1 | 1.7 | 2.0 | 2.3 | Vp-p |
| | V ₀₂ | | 2.0 | 2.5 | 3.0 | |
| Input Sensitivity | V _{IN MIN} | Note 2 | - | 42 | - | dBµV |
| | V _{IN MAX} | | 100 | 107 | - | |
| Sync Tip Level | V _{SYNC} | Note 3 | 2.6 | 2.9 | 3.2 | V |
| Output Level For No Input | V _{IF} | Note 4 | 4.8 | 5.2 | 5.6 | V |
| Differential Gain | DG | Note 5 | - | 2 | 5 | % |
| Differential Phase | DP | | - | 2 | 5 | ° |
| PIF Output Frequency Characteristic | f _C | Note 6 | 5 | 7 | - | MHz |
| Carrier Wave Compression Ratio | CR | Note 7 | 50 | 55 | - | dB |
| 2nd Harmonics Compression Ratio | HR | | 50 | 55 | - | |
| PIF Input Resistance | R _{PIF} | Note 8 | - | 1.5 | - | kΩ |
| PIF Input Capacitance | C _{PIF} | | - | 3.8 | - | pF |
| S/N | S/N | Note 9 | 52 | 55 | - | dB |
| 920kHz Beat | I ₉₂₀ | Note 10 | 42 | 45 | - | dB |
| IF AGC Range | R _{WAGC} | Note 11 | 61 | 65 | 69 | dB |
| IF AGC Voltage | V _{5MEAN} | Note 12 | 4.2 | 4.5 | 4.8 | V |
| | V _{5MAX} | | 7.4 | 7.6 | - | |
| | V _{5MIN} | | - | 3.8 | - | |
| RF AGC Voltage | V _{3MAX} | Note 13 | 7.7 | 8.2 | - | V |
| | V _{3MIN} | | - | 0 | 0.5 | |
| RF AGC Control Range | Δ _{GRFAGC} | Note 14 | 35 | 40 | - | dB |
| AFT Center Voltage | V _{4CENT} | Note 15 | 2.2 | 2.5 | 2.8 | V |
| AFT Voltage | V _{4MAX} | Note 16 | 4.4 | 4.8 | - | V |
| | V _{4MIN} | | - | 0.2 | 0.5 | |
| AFT Sensitivity | Δ _{AFT} | Note 17 | - | 40 | - | kHz/V |
| AFT Output Resistance | RAFTOUT | Note 18 | 40 | 50 | 60 | kΩ |
| PIF VCO Control Sensitivity | Δ _{fVCO} | Note 19 | 2.0 | 2.5 | - | MHz/V |
| PIF VCO Pull-in Range | f _{ph} | Note 20 | 1.0 | 1.5 | - | MHz |
| | f _{pl} | | 1.0 | 1.5 | - | |
| PIF VCO Control Range | Δ _{fPIFVCO} | Note 21 | - | 4.4 | - | MHz |

SIF

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--|---------|----------------|------|------|------|----------------------|
| Sound Output Level | VAAC | Note 22 | 400 | 500 | 600 | mVrms |
| | VADC | | - | 4.5 | - | V |
| Sound Distortion | VAUDIO | Note 23 | - | 0.3 | 1.0 | % |
| AMR | AMR | Note 24 | 50 | 60 | - | dB |
| Limiting Sensitivity | VLIM | Note 25 | - | 35 | - | dB \neq V |
| Sound Output Frequency Characteristics | fAUDIOH | Note 26 | - | 130 | - | kHz |
| | fAUDIOL | | - | -130 | - | |
| Sound Output Resistance | RSOUT | Note 27 | 24 | 30 | 36 | k \neq \emptyset |

ATT

| | | | | | | |
|------------------|----------|---------|------|-----|-----|----------------------|
| ATT Gain | GATTMAXE | Note 28 | -2.0 | 0.0 | 2.0 | dB |
| | GATTMAXT | | 4.0 | 6.0 | 8.0 | |
| | GATTMEAN | | -16 | -12 | -9 | |
| | GATTMIN | | -99 | -85 | - | |
| DC Voltage Drift | V1VAR | Note 29 | - | - | 50 | mV |
| | V1DC | | 3.2 | 3.7 | 4.2 | V |
| Input Impedance | Ri53 | Note 30 | - | 30 | - | k \neq \emptyset |
| | Ri55 | | - | 47 | - | |

Video

| | | | | | | |
|-----------------------------------|---------|---------|------|--------|------|----------------------|
| Input Impedance | Ri41 | Note 31 | 100 | - | - | k \neq \emptyset |
| Input Dynamic Range | Vdi41 | Note 32 | 1.0 | 1.2 | 1.5 | V |
| Video Total Gain | Gy | Note 33 | 4.5 | 5.0 | - | |
| Video Frequency Characteristic | fy | Note 34 | 6.0 | 7.0 | - | MHz |
| Maximum Output | Vdo1 | Note 35 | 7.5 | 8.0 | - | V |
| Blackexpansion Amp. Gain | GBAMP | Note 36 | 1.18 | 1.43 | 1.68 | IRE |
| Black Expansion Start Point | GBSTP | | 40 | 50 | 60 | |
| Dc Restoration | Tbc | Note 37 | 100 | 103 | 105 | % |
| Sharpness Control Characteristics | GSHcent | Note 38 | 1 | 4 | 7 | dB |
| | GSHmax | | 9 | 12 | 15 | |
| | GSHmin | | - | -18 | -15 | |
| Sharpness Delay Time | tSHDLY | Note 39 | - | 125 | - | ns |
| Cnotrast Control Characteristics | GcNcent | Note 40 | 4.5 | 6 | 7.5 | dB |
| | GcNmin | | 22.5 | 24 | 28.5 | |
| H. V - BLK Output Voltage | VBLK | Note 41 | - | 0.7 | 1.0 | V |
| V-BLK Width | TVBLK | Note 42 | - | 3.5~24 | - | H |
| fsc Trap Gain | GTRAP | Note 43 | - | -28 | -20 | dB |

OSD

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------|--------|----------------|---------|------|------|------|
| Osd Switching Voltage | VthOSD | Note 44 | 0.7 | 1.0 | 1.3 | V |
| Osd Delay Time | tOSDDL | Note 45 | - | 15 | 30 | ns |
| Osd Delay Time Difference | tOSDD | | - | 5 | 10 | |
| Osd Rising Time | ¥óR | | - | 15 | 30 | |
| OSD Falling Time | ¥óF | | - | 15 | 30 | |
| Input Clamp Voltage | VOSDC | | Note 46 | 4.4 | 4.9 | |
| OSD Gain | GOSD | Note 47 | 1.8 | 2.0 | 2.2 | V |
| Input Dynamic Range | VdiOSD | Note 48 | 2.0 | 2.2 | 2.4 | V |

Cutoff Drive

| | | | | | | |
|---|---------|---------|------|-------|------|----|
| Brightness Control Characteristics | VBRTmax | Note 49 | 3.6 | 4.0 | 4.3 | V |
| | VBRTcen | | 2.4 | 2.7 | 3.0 | |
| | VBRTmin | | 1.0 | 1.4 | 1.7 | |
| Brightness Control Difference Between 3Axes | ¥ÄVRGB | Note 50 | -50 | 0 | 50 | mV |
| Cutoff Control Characteristics | Vcutmax | Note 51 | 0.5 | 0.65 | 0.8 | V |
| | Vcutcen | | - | 0.00 | - | |
| | Vcutmin | | -0.8 | -0.65 | -0.5 | |
| Drive Control Characteristics | Gdrvmax | Note 52 | 3.75 | 4.25 | 4.75 | dB |
| | Gdrvmin | | -4.0 | -3.5 | -3.0 | |

Chroma

| | | | | | | |
|------------------------------------|---------|---------|-----------|-----------|------|-------|
| Input Dynamic Range | Vdi45 | Note 53 | 0.95 | 1.5 | 1.7 | V |
| ACC Characteristic | ea | Note 54 | -23 | -20 | -17 | dB |
| | eb | | 3 | 6 | 9 | |
| | A | | 0.9 | 1.0 | 1.1 | |
| Killer Point | EK | Note 55 | -48 | -46 | -43 | dB |
| VCXO Frequency Control Range | ¥Äfvcxo | Note 56 | ¾ 50 0 | ¾ 60 0 | - | Hz |
| VCXO Frequency Control Sensitivity | ¥ävvcxo | Note 57 | - | 1.0 | - | Hz/mV |
| VCXO Pull-in Range | fvcxopl | Note 58 | ¾ 30 0 | ¾ 45 0 | - | Hz |
| Demodulate Relative Gain | R / B | Note 59 | 0.80 | 0.84 | 0.90 | ° |
| | G / B | | 0.25 | 0.29 | 0.33 | |
| Demodulate Relative Phase | R - B | | 101 | 108 | 115 | |
| | G - B | | 236 | 243 | 250 | |
| Carrier Wave Remain | ECR | Note 60 | - | 20 | 40 | mVp-p |
| | ECB | | - | 20 | 40 | |
| | ECG | | - | 20 | 40 | |


| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP | MAX. | UNIT |
|----------------------------------|----------|----------------|------------|------------|--------|------|
| Color Control Characteristic | VCLRmax | Note 61 | 3.9 | 4.1 | 4.3 | Vp-p |
| | GCLRcen | | 4.5 | 6 | 7.5 | dB |
| | GCLRmin | | 38 | 40 | - | |
| Uni-color Control Characteristic | GUNicen | Note 62 | 4.5 | 6 | 7.5 | dB |
| | GUNlmin | | 22 | 24 | 26 | |
| TINT Control Characteristic | ƳĒTNTcen | Note 63 | -7 | 0 | 7 | ƒ |
| | ƳĒTNT | | Ƴ/4 3 5 | Ƴ/4 4 5 | Ƴ/4 55 | |
| Video Chroma Delay Time | tv - c | Note 64 | -30 | 0 | 30 | ns |

Deflection

| | | | | | | |
|------------------------------------|---------|---------|---------|-------------|------|------|
| Horizontal Free Run Freq. | fH | Note 65 | -100 | 0 | 100 | Hz |
| H. Out Pulse Duty | TH | Note 66 | 38 | 41 | 44 | % |
| H. Out Voltage | VHL | Note 67 | - | 0.2 | 0.3 | V |
| | VHH | | 2.5 | 3.0 | 3.5 | |
| VCO Osc. Start Voltage | VOSCmin | Note 68 | 3.0 | 3.5 | 4.0 | V |
| H. Out Start Voltage | VHST | Note 69 | 3.7 | 4.0 | - | V |
| H. Frequency Control Range | ƳĒfH | Note 70 | Ƴ/4 500 | Ƴ/4 650 | - | Hz |
| H. Freq. Control Sensitivity | ƳĒH | Note 71 | - | 500 | - | Hz/V |
| H. Sync. Pull-in Range | ƳĒfHPUL | Note 72 | Ƴ/4 450 | Ƴ/4 500 | - | Hz |
| H. Pull-in Stop Period | THSTP | Note 73 | - | 259 ~272 | - | H |
| AFC-2 Control Range | TAFC2 | Note 74 | 16 | 17 | - | ƳĒ |
| Horizontal Position Adjustment | TPAFC2 | Note 75 | - | Ƴ/4 3 | - | ƳĒ |
| X-RAY Protection Detection Voltage | VXDET | Note 76 | 3.35 | 3.5 | 3.65 | V |
| X-RAY Protection Hold Voltage | VXHLD | | 3.9 | 4.2 | 4.5 | |
| X-RAY Protection Hold Current | VXLD | | 80 | 100 | 120 | ƳĒA |
| Vertical Free Run Freq. | fV | Note 77 | - | 295 | - | H |
| V. Sync. Pull-in Range | TVST | Note 78 | - | 224 | - | H |
| | TVEND | | - | 295 | - | |
| V. Out Pulse Width | TV | Note 79 | - | 8 | - | H |
| V. Ramp Amplitude Control | VVL | Note 80 | 2.2 | 2.4 | - | V |
| | VVH | | - | 1.6 | 1.8 | |
| H. Sync. Separation Level | Rsepa | Note 81 | 30 | 35 | 40 | % |
| Forced V. Osc. (262.5H) | fv60 | Note 82 | - | 60 | - | Hz |

SIGNAL FOR MEASUREMENT

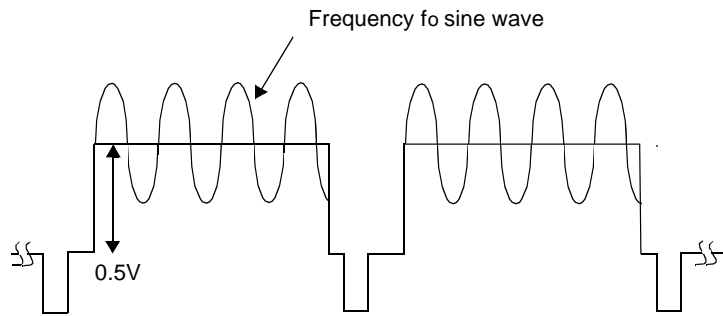"ç Input Signal 1



"è Input Signal 2

