TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

# TC7MBD3245AFK

#### Octal Bus Switch

The TC7MBD3245AFK provides eight bits of high-speed TTL-compatible bus switching in a standard '245 device pinout. The low on-state resistance of the switch allows connections to be made with minimal propagation delay.


The device is organized as one 8-bit switch. When output enable  $(\overline{OE})$  is low, the switch is on and port A is connected to port B. When  $\overline{OE}$  is high, the switch is open and a high-impedance state exists between the two ports.

The device is enable to realize the shift of signal level from  $5~\mathrm{V}$  to  $3.3~\mathrm{V}$ .

All inputs are equipped with protection circuits against static discharge.


#### **Features**

- Operating voltage:  $V_{CC} = 4.5 \sim 5.5 \text{ V}$
- High speed:  $t_{pd} = 0.32 \text{ ns (max)}$
- Low on resistance:  $R_{ON} = 5 \Omega$  (typ.)
- Compatible with TTL outputs (control inputs)
- Low Power Dissipation: Icc = 10 μA (max.)
- Package: VSSOP (US20)
- Pin compatible with the 74xx245 type.
- Functionally equivalent to (FST/CBT) 3245.



Weight: 0.03 g (typ.)

#### Pin Assignment (top view)




NC-No Internal Connection



#### **Truth Table**

Inputs	Function
ŌĒ	T directori
L	A port = B port
Н	Disconnect

## **System Diagram**



#### **Absolute Maximum Ratings (Note)**

Characteristics	Symbol	Rating	Unit	
Power supply range	V <sub>CC</sub>	-0.5~7.0	V	
DC input voltage	V <sub>IN</sub>	-0.5~7.0	V	
DC switch voltage	V <sub>S</sub>	-0.5~7.0	V	
Input diode current	I <sub>IK</sub>	-50	mA	
Continuous channel circuit	IS	128	mA	
Power dissipation	P <sub>D</sub>	180	mW	
DC V <sub>CC</sub> /ground current	I <sub>CC</sub> /I <sub>GND</sub>	±100	mA	
Storage temperature	T <sub>stg</sub>	-65~150	°C	

Note: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

## **Operating Ranges (Note)**

Characteristics	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	4.5~5.5	٧
Input voltage	$V_{IN}$	0~5.5	V
Switch voltage	VS	0~5.5	V
Operating temperature	T <sub>opr</sub>	-40~85	°C
Input rise and fall time	dt/dv	0~10	ns/V

Note: The operating ranges must be maintained to ensure the normal operation of the device.

2



#### **Electrical Characteristics**

## DC Characteristics ( $Ta = -40 \sim 85$ °C)

Charac	teristics	Symbol	Test Condition		V <sub>CC</sub> (V)	Min	Typ. (Note 1)	Max	Unit	
Input voltage	"H" level	V <sub>IH</sub>	_		4.5~5.5	2.0	_	_	V	
input voitage	"L" level	V <sub>IL</sub>	_		4.5~5.5	_	_	0.8	ď	
High-level outp	ut voltage		IOH = -1 μA		4.75	2.3	2.8	3.2		
riigri-ievei outp	(Note 2)	V <sub>OH</sub>	$V_{IS} = V_{CC}$		5.0	2.5	3.0	3.4	V	
	(14010-2)		VIS - VCC	= ACC		2.7	3.2	3.6		
Input leakage of	current	I <sub>IN</sub>	V <sub>IN</sub> = 0~5.5 V		4.5~5.5		_	±1.0	μА	
Power off leaka	ige current	I <sub>OFF</sub>	A, B, $\overline{OE} = 0 \sim 5.5 \text{ V}$		0		_	±1.0	μΑ	
Off-STATE leal (switch off)	kage current	I <sub>SZ</sub>	A, B = $0 \sim 5.5 \text{ V}$ , $\overline{OE} = V_{CC}$		4.5~5.5			±1.0	μА	
				I <sub>IS</sub> = 64 mA	4.5		5	9		
			V <sub>IS</sub> = 0 V	V:- 0.V	115 - 04 1117	4.75	_	5	8	
ON resistance	(Note 3)	Pau	VIS = 0 V	I <sub>IS</sub> = 30 mA	4.5		5	9	Ω	
ON Tesistance		R <sub>ON</sub>	V <sub>IS</sub> = 2.3 V, I <sub>IS</sub> = 15 mA	IIS – 30 IIIA	4.75		5	8	52	
				^	4.5		35	65		
			V  S - 2.5 V, I S - 15 III	•	4.75		35	50		
Quiescent supp	oly current	ICC	VIN = VCC or GND,I <sub>OUT</sub> = 0		5.5	_	_	10	μА	
Increase in I <sub>CC</sub>	per input	Δl <sub>CC</sub>	V <sub>IN</sub> = 3.4 V (one input)		5.5		_	2.5	mA	

Note 1: Typical values are at  $V_{CC} = 5 \text{ V}$ ,  $Ta = 25^{\circ}\text{C}$ .

Note 2: It recommends that this device uses Pull-up resistance when adding and using resistance for an output terminal. Since it couses to drop a VOH voltage level when using Pull-down resistance for an output terminal.

Note 3: Measured by the voltage drop between A and B pins at the indicated current through the switch. On resistance is determined by the lower of the voltages on the two (A or B) pins.

## AC Characteristics ( $Ta = -40 \sim 85$ °C)

Characteristics	Symbol	Test Condition	V <sub>CC</sub> (V)	Min	Max	Unit
Propagation delay time (bus to bus)	t <sub>pLH</sub> t <sub>pHL</sub>	Figure 1, Figure 2 (Note)	4.5	ı	0.32	ns
Output enable time	t <sub>pZL</sub> t <sub>pZH</sub>	Figure 1, Figure 3	4.5		7.0	ns
Output disable time	t <sub>pLZ</sub> t <sub>pHZ</sub>	Figure 1, Figure 3	4.5		7.0	ns

Note: The propagation delay time is calculated by the RC (on-resistance and load capacitance) time constant.


## **Capacitive Characteristics (Ta = 25°C)**

Characteristics	Symbol	Test Condition	V <sub>CC</sub> (V)	Тур.	Unit
Control pin input capacitance	C <sub>IN</sub>	(Note)	5.0	3	pF
Switch terminal capacitance	C <sub>I/O</sub>	$\overline{OE} = V_{CC}$ (Note)	5.0	10	pF

Note: This parameter is guaranteed by design.



#### **AC Test Circuit**



Parameter	Switch	
t <sub>pLH</sub> , t <sub>pHL</sub>	Open	
t <sub>pLZ</sub> , t <sub>pZL</sub>	7.0 V	
t <sub>pHZ</sub> , t <sub>pZH</sub>	GND	

Figure 1

#### **AC Waveform**

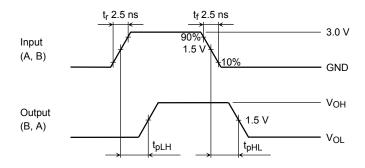


Figure 2 t<sub>pLH</sub>, t<sub>pHL</sub>

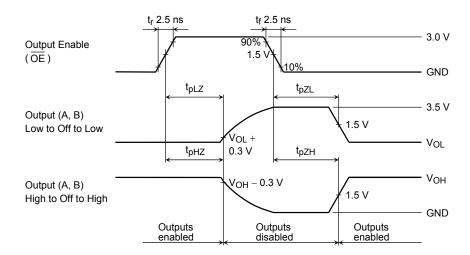






Figure 3  $t_{pLZ}$ ,  $t_{pHZ}$ ,  $t_{pZL}$ ,  $t_{pZH}$ 


## V<sub>OH</sub> - V<sub>CC</sub> Characteristics (typ.)















Figure 4

5 2007-10-19

# **Package Dimensions**

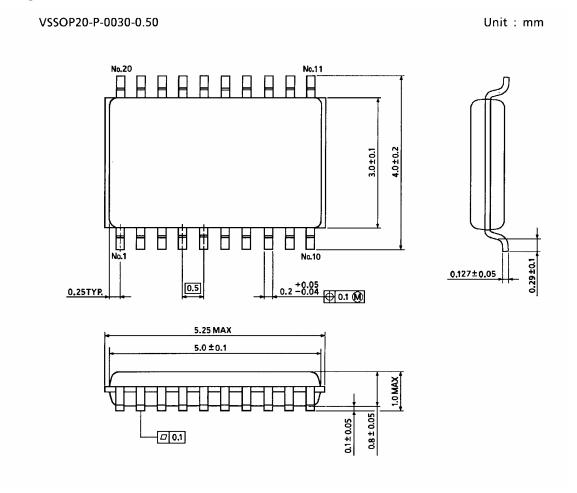

Weight: 0.03 g (typ.)

#### **RESTRICTIONS ON PRODUCT USE**

20070701-EN GENERAL

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which
  manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No
  responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
  may result from its use. No license is granted by implication or otherwise under any patents or other rights of
  TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS
  compatibility. Please use these products in this document in compliance with all applicable laws and regulations
  that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses
  occurring as a result of noncompliance with applicable laws and regulations.

2007-10-19