



3rd Angle System Unit : mm Drawing Not to Scale

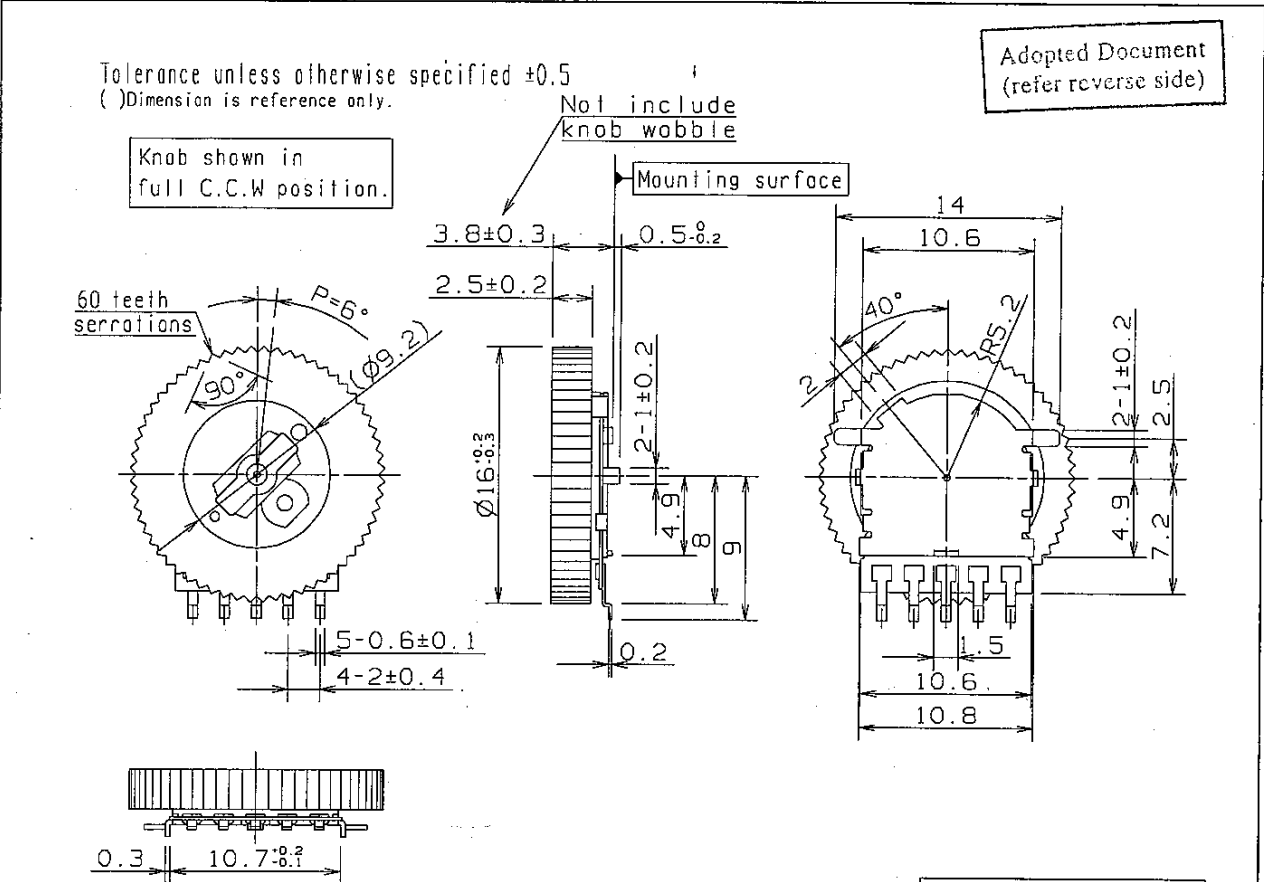

Knob color : BLACK


P.W.B. piercing plan.(Tolerance: $\pm 0.1$ )

(View from mounting side)  
 (Recommended land pattern)

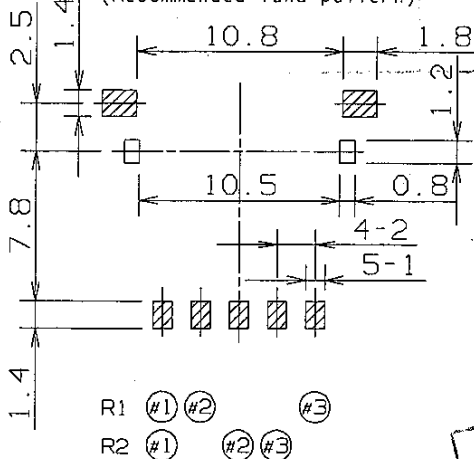

25 MAR 2008  
 TECHNICAL DEPARTMENT

Element circuit diagram

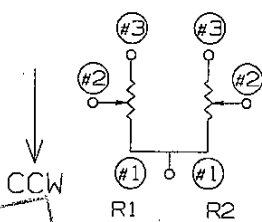

**REFERENCE ONLY**  
 EMCD - TECHNICAL  
 THIS DOCUMENT WILL  
 VARIABLE RESISTOR BE UPDATED  
 NON CONTROL DOCUMENT.  
 EVU TUA B16-B54

DESIGN	Y. Sakamoto	Mar 26, 2001	NAME			
DRAW			TYPE NO.		REVISIONS	DATE
CHECK	A. Ohtsuka	Mar 26, 2001				
APPROVAL	C.J. Ohtsuka	Mar 26, 2001				
			DRAWING NO.	RV-H- 02443		1 / 5

Tsuyama Matsushita Electric Co.,Ltd.

Scope :

- Control shown is designed in reference with our specifications.
- Also see samples attached.

Mechanical Specifications :


- Knob rotation angle :  $270^\circ \pm 5^\circ$
- Knob stopper strength : 60.0 mN·m min. (State of mounting a volume on the P.W.B.)
- Knob rotation torque : 0.5 mN·m to 10.0 mN·m (At 5 °C to 35 °C)  
(Knob shall be rotated at -10 °C)
- Knob wobble : Inclination of the knob shall be  $\pm 0.3$  mm max.  
(Without external force.)

Electrical Specifications :

\*1

Resistor No.s	Nominal total res. value and tolerance	Taper (Our code)	Minimum resistance between terminals		Rated power (W)	Rated Voltage(V)	Noise level (mV)
			#1 & #2	#2 & #3			
R1	50k $\Omega \pm 30\%$	B	10 $\Omega$ max.	25 $\Omega$ max.	0.01	AC 20	100max.
R2	50k $\Omega \pm 30\%$	B	10 $\Omega$ max.	25 $\Omega$ max.	0.01	AC 20	100max.

Power Derating Curve

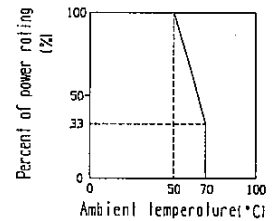

\*1 For potentiometers operated in ambient temperatures above 50 °C, Power Rating shall be derated in accordance with the Power Derating Curve.

- Taper : Output voltage ratio is 40 % to 60 % at  $135^\circ \pm 3^\circ$  position. Percentage of input voltage between terminal 1 and 3 versus output voltage between terminal 1 and 2.
- Tracking : An AC voltage of 2 V at 1 kHz shall be applied between terminals 1 and 3 of each resistor. The ratio of the out-put between terminals 1 and 2 to the applied voltage shall be within 3 dB from -20 dB to 0 dB within 3 dB from -40 dB to -20 dB regarding the resistor as
- Insulation resistance : 100 M $\Omega$  min. (At DC 100 V)
- Withstand voltage : AC 100 V , 1 min min.

Durability :

- Rotation life : 10000 T min.
- Soldering heat : No intermittent and breakdown after soldering.  
In case of hand soldering  
... 260 °C max. , 3 s max. , 30 W max.  
In case of reflow soldering  
... Refer to the clause of Soldering conditions. (Only 1 time)


Notes :

- Marking :
  - Our identification mark (M)
  - Nominal resistance value
  - Taper code and Nominal resistance value · Date code  
    ↳ (Last 3 characters of our part No.)
  - (Packing case only)
- Caution :
  - Do not use in D C voltage condition.
  - Please give consideration for providing construction to hold knob in order to prevent knob from side force.
  - Please don't apply excessive stress to terminals to avoid electric intermittence.
  - Please don't place the products in a location where corrosive gas may be generated.
- Others : Correspond to JIS-C-6443 requirements.

NAME	VARIABLE RESISTOR	<b>REFERENCE ONLY</b>	
		ISSUE	EMCD - TECHNICAL REVISIONS
TYPE NO.	EVU TUA B16 B54	DRAWING NOT DOCUMENT WILL NOT BE UPDATED	
		RV-H- 02448	2 / 5

Tsuyama Matsushita Electric Co., Ltd. NON CONTROL DOCUMENT.

Soldering conditions :

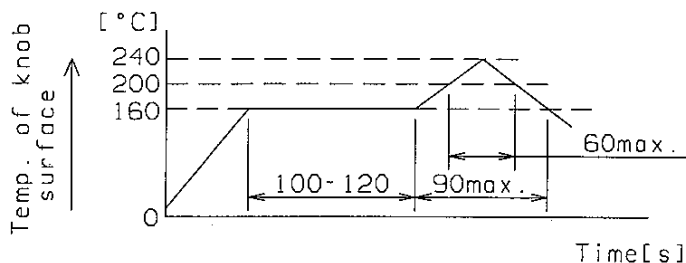


- Please solder mounting metal certainly.
- Re-soldering by soldering iron shall be allowed under 260 °C max. , 3 s max. , 1 time. Soldering iron for re-soldering have to be 30 W max.
- Please avoid washing after soldering, it may cause electrical contact failure.
- However the reflow temperature curve is the same as above profile, real thermal stress for part(s) and solderability are depend on each reflow system. Please do enough pre-checking for the reflow conditions on your system.

**REFERENCE ONLY**  
 EMCD - TECHNICAL  
 THIS DOCUMENT WILL  
 NOT BE UPDATED  
 NON CONTROL DOCUMENT.

NAME VARIABLE RESISTOR		
TYPE NO. EVU TUA B16 B54	ISSUE DRAWING NO. RV-H- 02443	REVISIONS DATE 3 / 5

Carrier tape

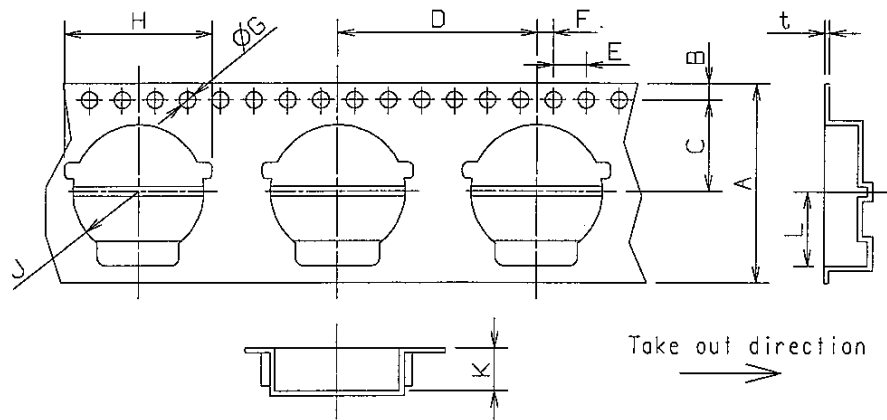


Unit : mm

A	B	C	D	E	F	G	H	J	K	L	t
±0.3	±0.2	±0.1	±0.2	±0.1	±0.1	±0.1	±0.3	±0.3	±0.3	±0.3	±0.1
24	1.75	11.5	24	4	2	1.5	18	8.1	4.8	9.3	0.4

\* Top tape (sheet tape) strip strength : 0.3 N to 1.0 N

\* Dimension "H" and "J" should be defined of the bottom face.

Reel  
(800 pcs./reel)

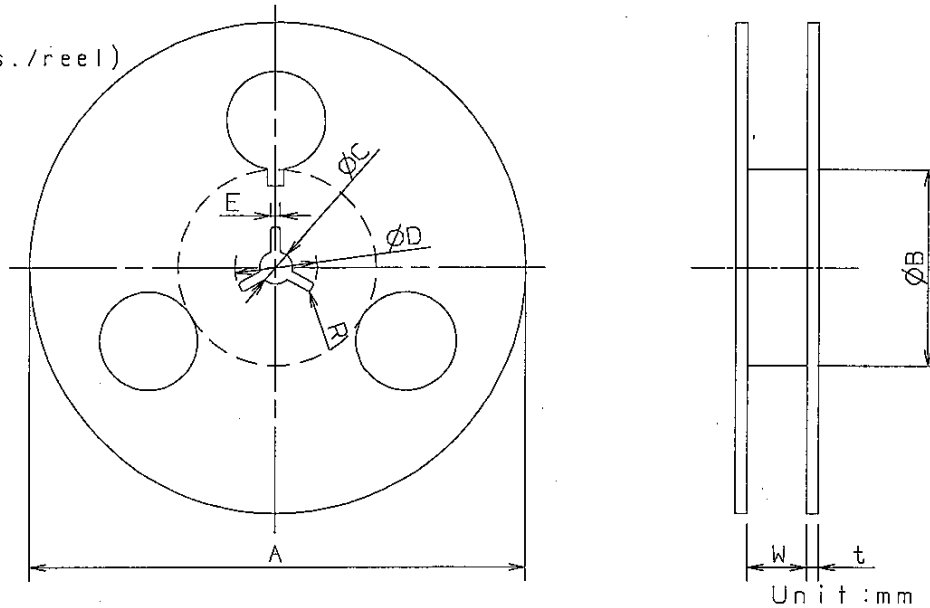

Unit : mm

A	B	C	D	E	W	t	R
±2	±0.5	±1	±0.5	±2	±1	±0.5	
Ø380	Ø50min	Ø13	Ø21	2	26	3	1

REFERENCE ONLY

NAME	VARIABLE RESISTOR	EMCD - TECHNICAL		DATE
		ISSUE	THIS DOCUMENT REVISIONS WILL	
TYPE NO.	EVU TUA B16 B54	DRAWING NO. NOT BE UPDATED		4 / 5
		RV-H-02443 CONTROL DOCUMENT.		

Tsuyama Matsushita Electric Co., Ltd.

Prohibitions and precautions for handling.

1) Prohibited items on fire and smoking

- Absolutely avoid use of a potentiometer beyond its rated range because doing so may cause a fire. If misuse or abnormal use may result in conditions in which the potentiometer is used out of its rated range, take proper measures such as current interruption using a protective circuit.
- The grade of nonflammability for resin used in potentiometers is "94HB," which is based on UL94 Standards (flammability test for plastic materials). Prohibit use in a location where a spreading fire may be generated or prepare against a spreading fire.

2) For use in equipment for which safety requested

- Although care is taken to ensure potentiometer quality, inferior characteristics, short circuits, open circuits are some problems that might be generated. To design a set which places maximum emphasis on safety, review the affect of any single fault of a potentiometer in advance and preform virtually fail-safe design to ensure maximum safety by:
  - Preparing a protective circuit or a protective device to improve system safety, and
  - Preparing a redundant circuit to improve system safety so that the single fault of a potentiometer does not cause a dangerous situation.

3) Reliability

- The item designed mainly corresponds to JIS (Japan Industry Standard) on the reliability conditions.
  - Operation temperature range: -10 °C to +70 °C
  - Preservative temperature range: -40 °C to +70 °C

Handling of approval specification.

- This specification form specify this item only. Please perform your approval test in the actual application conditions beforehand.
- Please return one copy of this specification form with your approval stamp or signature to us.

Otherwise, it might be happened that the item can not be supplied.

The terms to return back us after receipt of this product specificatin shall be one year from the issued date. In case more than one year past, please request us new specifications again before ordering this product.

- Writings in this specification form are subject to change through precautions.

NAME VARIABLE RESISTOR		REFERENCE ONLY	
		EMCO - TECHNICAL	
TYPE NO. EVU TUA B16 B54		THIS DOCUMENT WILL	
		ISSUE	DATE
		NOT BE UPDATED	
		REVISTONS	
		NON CONTROL DOCUMENT.	
		DRAWING NO. RV-H- 02443	
		5 / 5	

Tsuyama Matsushita Electric Co.,Ltd.