


DUAL POWER OPERATIONAL AMPLIFIER

The KA9256 is a dual power operational amplifier with an output maximum current of 1.0A ($V_S = \pm 15V$). It can be used as an arm driver for player, a driver for brush motors forward and reverse rotation control and an output driver for a hole motor.

10 SIP H/S

FEATURES


- Internal current limiting: $I_{SC} = 350mA$ ($R_{SC} = 2.2$)
- High output current: $I_O = 500mA$ max
- 10 SIP H/S package
- Internal phase compensation type



4

ORDERING INFORMATION

Device	Package	Operating Temperature
KA9256	10 SIP H/S	-25°C ~ +75°C

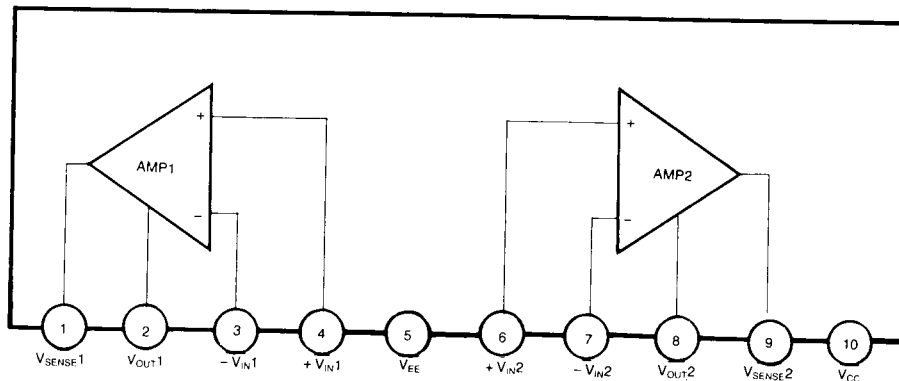BLOCK DIAGRAM

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	± 8	V
Output Current	I_O	1.0	A
Power Dissipation	P_D	12.5	W
Operating Temperature Range	T_{OPR}	$-25 \sim +75$	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	$-65 \sim +150$	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

(V_{CC} = +15V, V_{EE} = -15V, T_a = 25 $^{\circ}\text{C}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Offset Voltage	V_{IO}			2	6	mV
Input Offset Current	I_{IO}			10	200	nA
Input Bias Current	I_{BIAS}			100	700	nA
Supply Current	I_{CC}			10	20	mA
Output Voltage Swing	$V_{O(P-P)}$	$R_L = 33\Omega$	± 12	± 13		V
Large Signal Voltage Gain	A_V			100		dB
Input Voltage Range	V_I		± 12	± 14		V
Common Mode Rejection Ratio	CMRR		70	90		dB
Power Supply Rejection Ratio	PSRR			50	150	$\mu\text{V/V}$
Bandwidth	BW			1.0		MHz
Slew Rate	SR	$A_V = 1, R_L = 33\Omega, R = 10\Omega, C = 0.1\mu\text{F}$		0.15		V/ μS
Limiting Current	I_{LM}	$R_{SC} = 2.2\Omega$		0.35		A
Cross Talk	CT	$R_L = 33\Omega, V_O = 1V_{P-P}$		60		dB