




PHASE NOISE (1 Hz BW, typical)

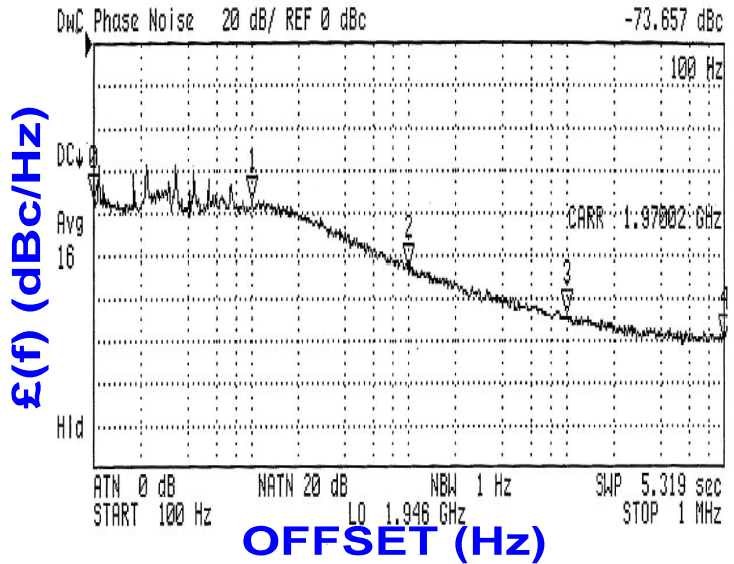

FEATURES

- Frequency Range: 1970 - 2030 MHz
- Step Size: 100 KHz
- PLL-24H - Style Package

APPLICATIONS

- Telecommunications
- Satellite
- Telemetry

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Frequency Range	1970 - 2030	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-107	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Sideband Spurs (typ.)	-70	dBc
Power Output	2±2.5	dBm
Load Impedance	50	Ω
Step Size	100	KHz
Charge Pump Output Current	5000	μA
Switching Speed (typ., adjacent channel)	2.5	mSec
Startup Lock Time (typ.)	2.5	mSec
Operating Temperature Range	-40 to 85	°C
Package Style	PLL-24H	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	25	mA

All specifications are typical unless otherwise noted and subject to change without notice.


APPLICATION NOTES

- AN-107 : How to Solder Z-COMM VCOs / PLLs
- AN-200 : Mounting and Grounding of Z-COMM PLLs
- AN-201 : PLL Fundamentals AN-202 : PLL Functional Description


NOTES:

Reference Oscillator Signal: 5 MHz f_{osc} <math>< 100</math> MHz Prescaler: 32
 Frequency Synthesizer: Analog Devices - ADF4106


VCO TUNING CURVE, typ.

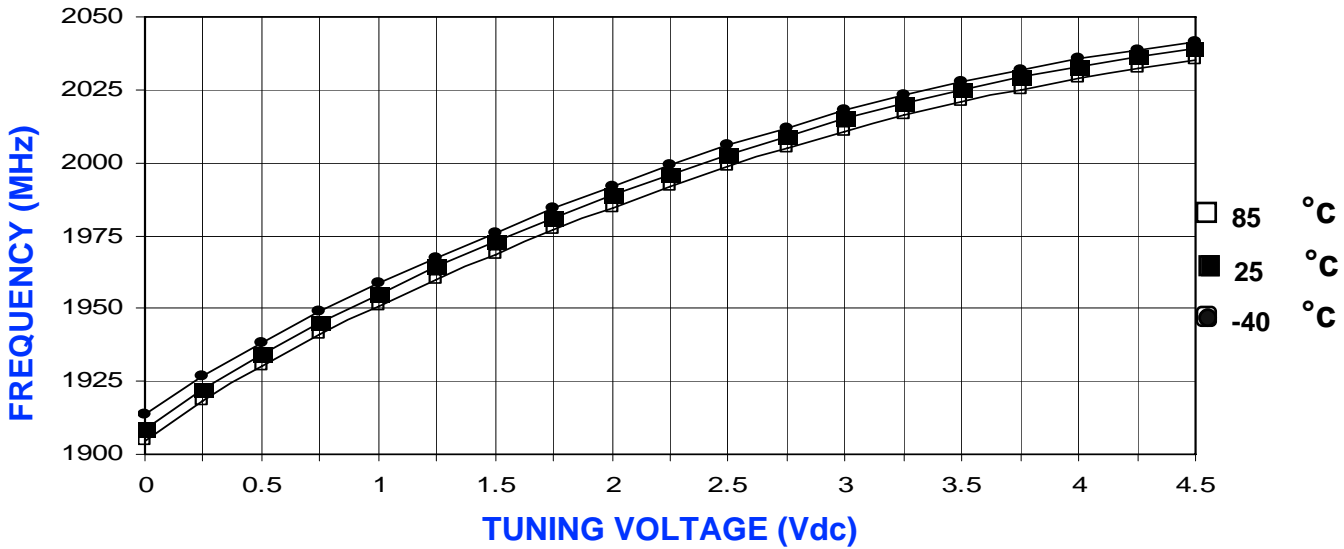

VCO POWER CURVE, typ.

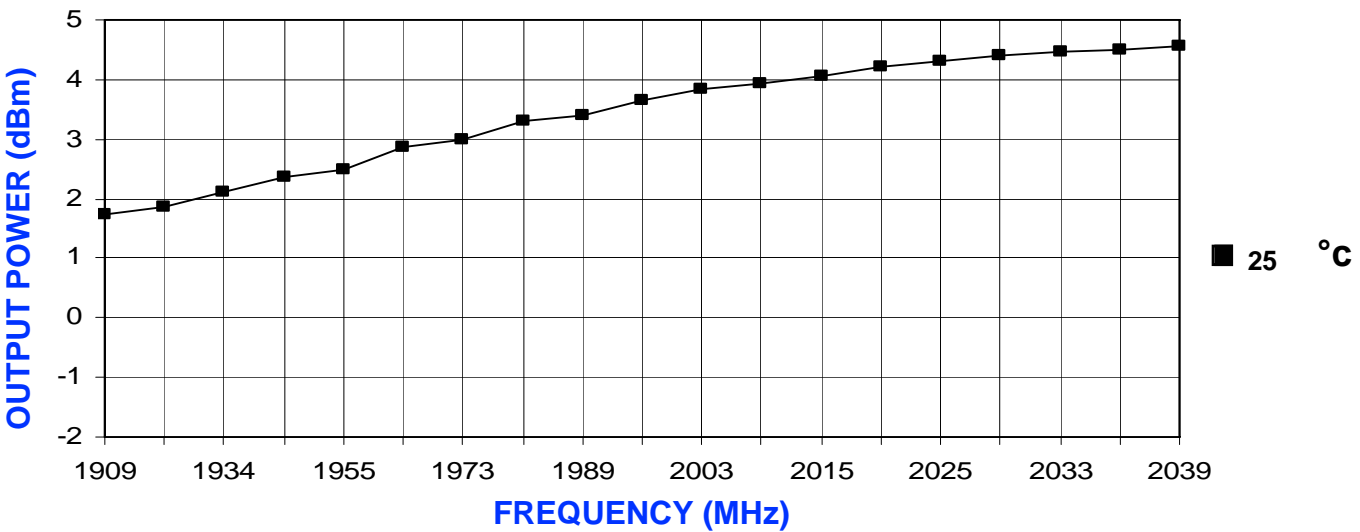

PHYSICAL DIMENSIONS

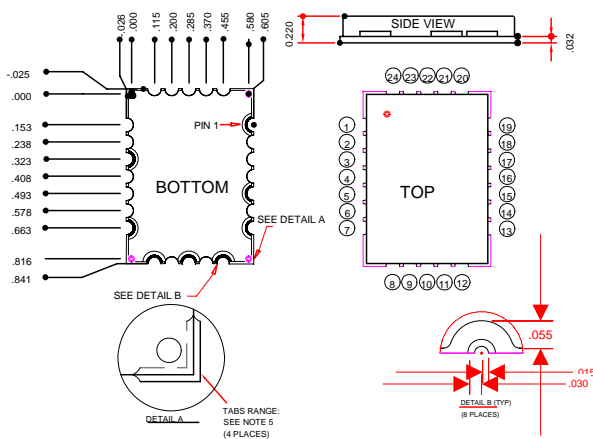

1. The inside radius of all 24 half holes at the perimeter of the board are plated to provide a surface for the attachment of the PLL Module to the PCB. 16 pads are for grounding, 8 pads are for signal interface.
2. The surface of the shield is tin-plated and may be soldered to. The shield's base metal is cold-rolled steel.
3. The ground plane on the bottom side is ground and attaches to a ground track on the top side of the board as well as to the shield.
4. Unless otherwise noted all dimensions are in inches.
5. Unless otherwise noted all tolerances are as follows:
.xxx = ± .010.

- P1 RF OUTPUT
- P2-4 GROUND
- P5 REFERENCE OSCILLATOR INPUT
- P6 GROUND
- P7 CLOCK
- P8 DATA
- P9 GROUND
- P10 LOAD ENABLE
- P11 GROUND
- P12 LOCK DETECT
- P13 VCC
- P14 GROUND
- P15 GROUND
- P16 GROUND
- P17 NO CONNECTION
- P18-24 GROUND