




**NEW!**


Coupled Inductors—MSD7342 Series

For SEPIC
Applications

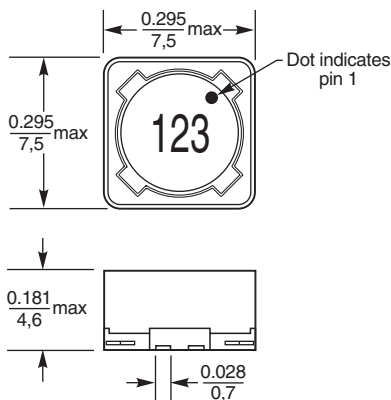

Dimensions are in $\frac{\text{inches}}{\text{mm}}$


Recommended Land Pattern



The excellent coupling coefficient ($k \geq 0.94$) makes the MSD7342 series of coupled inductors ideal for use in SEPIC applications. In SEPIC topologies, the required inductance for each winding in a coupled inductor is half the value needed for two separate inductors, allowing selection of a part with lower DCR and higher current handling.

These inductors provide high inductance, high efficiency and excellent current handling in a rugged, low cost part.

They can also be used as two single inductors connected in series or parallel, as a common mode choke or as a 1 : 1 transformer.

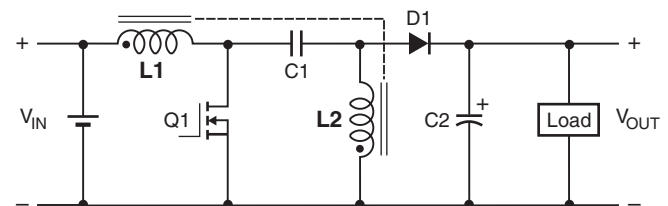

Typical SEPIC schematic

Refer to Application Note, Document 639,
"Selecting Coupled Inductors for SEPIC Applications"

Core material Ferrite

Terminations RoHS compliant matte tin over nickel over phos bronze. Other terminations available at additional cost.

Weight 0.76 – 0.87g

Ambient temperature -40°C to $+85^{\circ}\text{C}$ with I_{rms} current, $+85^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ with derated current

Storage temperature Component: -40°C to $+125^{\circ}\text{C}$.
Packaging: -40°C to $+80^{\circ}\text{C}$

Winding to winding isolation 200 Vrms

Resistance to soldering heat Max three 40 second reflows at $+260^{\circ}\text{C}$, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}\text{C}$ / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)
38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 250/7" reel; 1000/13" reel Plastic tape: 16 mm wide, 0.4 mm thick, 12 mm pocket spacing, 4.9 mm pocket depth

PCB washing Only pure water or alcohol recommended

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 621-1 Revised 11/10/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>

**NEW!**

Coupled Inductors for SEPIC Applications – MSD7342 Series

Part number ¹	Inductance ² ±20% (µH)	DCR max ³ (Ohms)	SRF typ ⁴ (MHz)	Isat (A) ⁵			Irms (A)	
				10% drop	20% drop	30% drop	both windings ⁶	one winding ⁷
MSD7342-252ML	2.5	0.033	55	6.0	6.2	6.3	2.17	3.06
MSD7342-332ML	3.3	0.037	43	5.2	5.3	5.4	2.05	2.89
MSD7342-472ML	4.7	0.051	35	4.1	4.3	4.6	1.74	2.46
MSD7342-562ML	5.6	0.063	32	3.9	4.1	4.2	1.57	2.22
MSD7342-682ML	6.8	0.070	30	3.7	3.8	3.9	1.49	2.10
MSD7342-822ML	8.2	0.075	27	3.3	3.4	3.5	1.44	2.03
MSD7342-103ML	10	0.100	22	2.8	2.9	3.0	1.24	1.76
MSD7342-123ML	12	0.120	20	2.5	2.6	2.7	1.14	1.61
MSD7342-153ML	15	0.130	18	2.2	2.3	2.4	1.09	1.54
MSD7342-183ML	18	0.170	15	2.0	2.2	2.3	0.95	1.35
MSD7342-223ML	22	0.220	13.5	1.9	2.0	2.1	0.84	1.19
MSD7342-273ML	27	0.250	12.0	1.7	1.8	1.9	0.79	1.11
MSD7342-333ML	33	0.270	11.0	1.5	1.6	1.7	0.76	1.07
MSD7342-393ML	39	0.380	10.0	1.3	1.4	1.5	0.64	0.90
MSD7342-473ML	47	0.420	9.5	1.2	1.3	1.4	0.61	0.86
MSD7342-563ML	56	0.460	8.7	1.1	1.2	1.3	0.58	0.82
MSD7342-683ML	68	0.600	7.3	1.0	1.1	1.2	0.51	0.72
MSD7342-823ML	82	0.680	6.2	0.90	1.00	1.1	0.48	0.67
MSD7342-104ML	100	0.770	5.5	0.80	0.92	0.98	0.45	0.63
MSD7342-124ML	120	1.03	4.5	0.70	0.80	0.90	0.39	0.55
MSD7342-154ML	150	1.35	4.0	0.65	0.76	0.80	0.34	0.48
MSD7342-184ML	180	1.52	3.8	0.62	0.66	0.73	0.32	0.45
MSD7342-224ML	220	1.72	3.5	0.59	0.62	0.66	0.30	0.42
MSD7342-274ML	270	2.41	3.3	0.55	0.57	0.60	0.25	0.36
MSD7342-334ML	330	2.70	3.0	0.49	0.52	0.54	0.24	0.34
MSD7342-394ML	390	3.05	2.8	0.45	0.47	0.50	0.23	0.32
MSD7342-474ML	470	4.00	2.6	0.41	0.43	0.46	0.20	0.28
MSD7342-564ML	560	4.43	2.5	0.38	0.40	0.42	0.19	0.26
MSD7342-684ML	680	5.00	2.3	0.36	0.37	0.38	0.18	0.25
MSD7342-824ML	820	6.80	2.2	0.30	0.32	0.35	0.15	0.21
MSD7342-105ML	1000	7.80	2.0	0.27	0.29	0.31	0.14	0.20

1. Please specify **termination** and **packaging** codes:

MSD7342-105M L C

Termination: **L** = RoHS compliant matte tin over nickel over phos bronze. Special order: **T** = RoHS tin-silver-copper (95.5/4/0.5) or **S** = non-RoHS tin-lead (63/37).

Packaging: **C** = 7" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (1000 parts per full reel).

- Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4284A LCR meter or equivalent. When leads are connected in parallel, inductance is the same value. When leads are connected in series, inductance is four times the value.
- DCR is for each winding. When leads are connected in parallel, DCR is half the value. When leads are connected in series, DCR is twice the value.
- SRF measured using an Agilent/HP 4191A or equivalent. When leads are connected in parallel, SRF is the same value.
- DC current, at which the inductance drops the specified amount from its value without current. It is the sum of the current flowing in both windings.
- Equal current when applied to each winding simultaneously that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- Maximum current when applied to one winding that causes a 40°C temperature rise from 25°C ambient. See temperature rise calculation.
- Electrical specifications at 25°C.

Refer to Doc 639 "Selecting Coupled Inductors for SEPIC Applications."

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Temperature rise calculation based on specified Irms

Winding power loss = $(I_{L1}^2 + I_{L2}^2) \times \text{DCR}$ in Watts (W)

Temperature rise (Δt) = Winding power loss $\times \frac{129^\circ\text{C}}{\text{W}}$

$\Delta t = (I_{L1}^2 + I_{L2}^2) \times \text{DCR} \times \frac{129^\circ\text{C}}{\text{W}}$

Example 1. MSD7342-123ML (Equal current in each winding)

Winding power loss = $(1.14^2 + 1.14^2) \times 0.120 = 0.312 \text{ W}$

$\Delta t = 0.312 \text{ W} \times \frac{129^\circ\text{C}}{\text{W}} = 40^\circ\text{C}$

Example 2. MSD7342-123ML ($I_{L1} = 1.4 \text{ A}$, $I_{L2} = 0.6 \text{ A}$)

Winding power loss = $(1.4^2 + 0.6^2) \times 0.120 = 0.278 \text{ W}$

$\Delta t = 0.278 \text{ W} \times \frac{129^\circ\text{C}}{\text{W}} = 36^\circ\text{C}$

Coupled Inductor Core and Winding Loss Calculator

This web-based utility allows you to enter frequency, peak-to-peak (ripple) current, and Irms current to predict temperature rise and overall losses, including core loss. Visit www.coilcraft.com/coupledloss.

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 621-2 Revised 11/10/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469


E-mail info@coilcraft.com Web <http://www.coilcraft.com>




NEW!

Coupled Inductors for SEPIC Applications – MSD7342 Series


Typical L vs Current

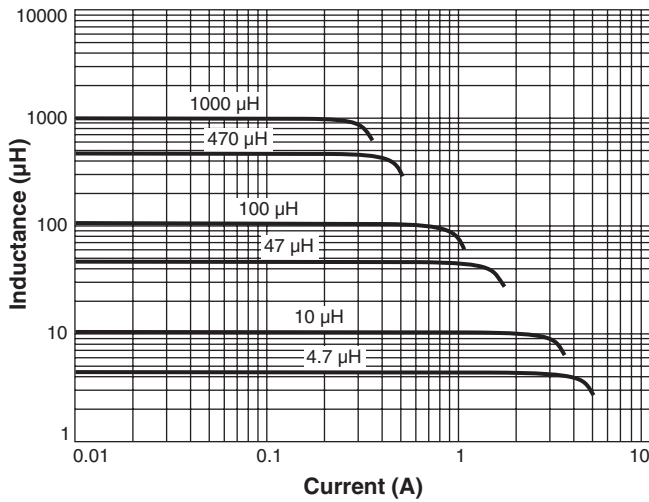

Typical L vs Frequency

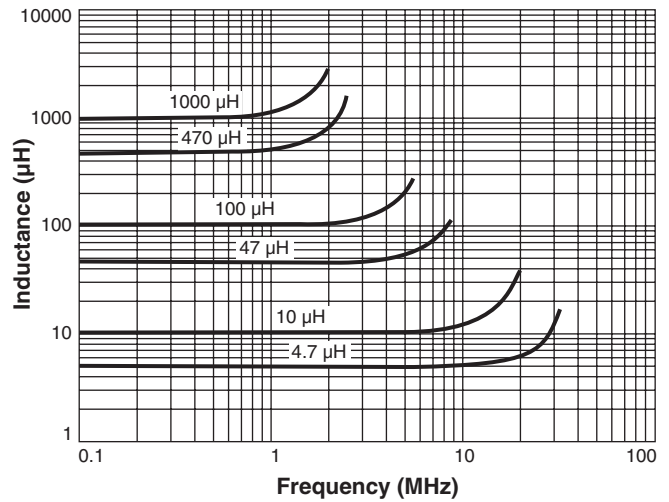

Irms Derating

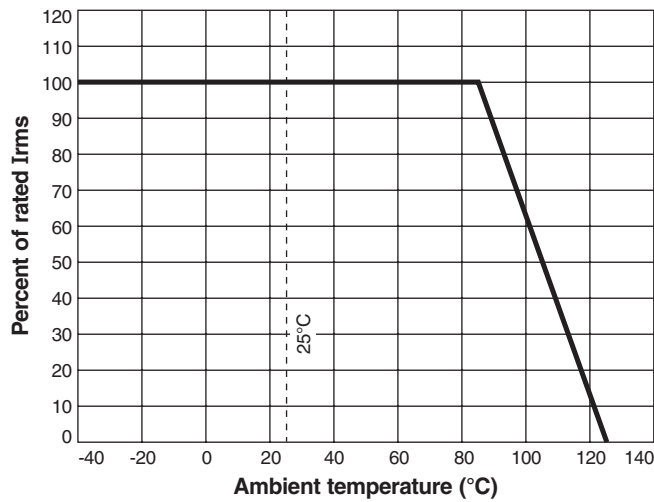

Specifications subject to change without notice.
Please check our website for latest information.

Document 621-3 Revised 11/10/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>