

# Dual General Purpose Transistors

The LMBT3946DW1T1 device is a spin-off of our popular SOT-23/SOT-323 three-leaded device. It is designed for general purpose amplifier applications and is housed in the SOT-363 six-leaded surface mount package. By putting two discrete devices in one package, this device is ideal for low-power surface mount applications where board space is at a premium.

- $h_{FE}$ , 100-300
- Low  $V_{CE(sat)}$ ,  $\leq 0.4$  V
- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- Available in 8 mm, 7-inch/3,000 Unit Tape and Reel
- Device Marking: LMBT3946DW1T1 = 46

### MAXIMUM RATINGS



Rating	Symbol	Value	Unit
Collector-Emitter Voltage (NPN) (PNP)	$V_{CEO}$	40 -40	Vdc
Collector-Base Voltage (NPN) (PNP)	$V_{CBO}$	60 -40	Vdc
Emitter-Base Voltage (NPN) (PNP)	$V_{EBO}$	6.0 -5.0	Vdc
Collector Current-Continuous (NPN) (PNP)	$I_C$	200 -200	mAdc
Electrostatic Discharge	$E_{SD}$	HBM>16000, MM>2000	V

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Package Dissipation <sup>(1)</sup> $T_A = 25^\circ\text{C}$	$P_D$	150	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range	$T_J, T_{stg}$	-55 to +150	$^\circ\text{C}$

1. Device mounted on FR4 glass epoxy printed circuit board using the minimum recommended footprint.

## LMBT3946DW1T1



LMBT3946DW1T1\*  
\*Q1 PNP  
Q2 NPN

### ORDERING INFORMATION

Device	Package	Shipping
LMBT3946DW1T1	SOT-363	3000Units/Reel

**LMBT3946DW1T1**
**ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

**OFF CHARACTERISTICS**

Collector–Emitter Breakdown Voltage <sup>(2)</sup>	$V_{(BR)CEO}$			Vdc
( $I_C = 1.0\text{ mAdc}$ , $I_B = 0$ ) (NPN)		40	–	
( $I_C = -1.0\text{ mAdc}$ , $I_B = 0$ ) (PNP)		–40	–	
Collector–Base Breakdown Voltage	$V_{(BR)CBO}$			Vdc
( $I_C = 10\ \mu\text{Adc}$ , $I_E = 0$ ) (NPN)		60	–	
( $I_C = -10\ \mu\text{Adc}$ , $I_E = 0$ ) (PNP)		–40	–	
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$			Vdc
( $I_E = 10\ \mu\text{Adc}$ , $I_C = 0$ ) (NPN)		6.0	–	
( $I_E = -10\ \mu\text{Adc}$ , $I_C = 0$ ) (PNP)		–5.0	–	
Base Cutoff Current	$I_{BL}$			nAdc
( $V_{CE} = 30\text{ Vdc}$ , $V_{EB} = 3.0\text{ Vdc}$ ) (NPN)		–	50	
( $V_{CE} = -30\text{ Vdc}$ , $V_{EB} = -3.0\text{ Vdc}$ ) (PNP)		–	–50	
Collector Cutoff Current	$I_{CEX}$			nAdc
( $V_{CE} = 30\text{ Vdc}$ , $V_{EB} = 3.0\text{ Vdc}$ ) (NPN)		–	50	
( $V_{CE} = -30\text{ Vdc}$ , $V_{EB} = -3.0\text{ Vdc}$ ) (PNP)		–	–50	

**ON CHARACTERISTICS (2)**

DC Current Gain	$h_{FE}$			–
( $I_C = 0.1\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ ) (NPN)		40	–	
( $I_C = 1.0\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ )		70	–	
( $I_C = 10\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ )		100	300	
( $I_C = 50\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ )		60	–	
( $I_C = 100\text{ mAdc}$ , $V_{CE} = 1.0\text{ Vdc}$ )		30	–	
( $I_C = -0.1\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ ) (PNP)		60	–	
( $I_C = -1.0\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ )		80	–	
( $I_C = -10\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ )		100	300	
( $I_C = -50\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ )		60	–	
( $I_C = -100\text{ mAdc}$ , $V_{CE} = -1.0\text{ Vdc}$ )		30	–	
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$			Vdc
( $I_C = 10\text{ mAdc}$ , $I_B = 1.0\text{ mAdc}$ ) (NPN)		–	0.2	
( $I_C = 50\text{ mAdc}$ , $I_B = 5.0\text{ mAdc}$ )		–	0.3	
( $I_C = -10\text{ mAdc}$ , $I_B = -1.0\text{ mAdc}$ ) (PNP)		–	–0.25	
( $I_C = -50\text{ mAdc}$ , $I_B = -5.0\text{ mAdc}$ )		–	–0.4	
Base–Emitter Saturation Voltage	$V_{BE(sat)}$			Vdc
( $I_C = 10\text{ mAdc}$ , $I_B = 1.0\text{ mAdc}$ ) (NPN)		0.65	0.85	
( $I_C = 50\text{ mAdc}$ , $I_B = 5.0\text{ mAdc}$ )		–	0.95	
( $I_C = -10\text{ mAdc}$ , $I_B = -1.0\text{ mAdc}$ ) (PNP)		–0.65	–0.85	
( $I_C = -50\text{ mAdc}$ , $I_B = -5.0\text{ mAdc}$ )		–	–0.95	

 2. Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ ; Duty Cycle  $\leq 2.0\%$ .

**LMBT3946DW1T1**

**ELECTRICAL CHARACTERISTICS**( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

**SMALL-SIGNAL CHARACTERISTICS**

Current-Gain – Bandwidth Product ( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 20 \text{ Vdc}$ , $f = 100 \text{ MHz}$ ) (NPN) ( $I_C = -10 \text{ mAdc}$ , $V_{CE} = -20 \text{ Vdc}$ , $f = 100 \text{ MHz}$ ) (PNP)	$f_T$	300 250	– –	MHz
Output Capacitance ( $V_{CB} = 5.0 \text{ Vdc}$ , $I_E = 0$ , $f = 1.0 \text{ MHz}$ ) (NPN) ( $V_{CB} = -5.0 \text{ Vdc}$ , $I_E = 0$ , $f = 1.0 \text{ MHz}$ ) (PNP)	$C_{obo}$	– –	4.0 4.5	pF
Input Capacitance ( $V_{EB} = 0.5 \text{ Vdc}$ , $I_C = 0$ , $f = 1.0 \text{ MHz}$ ) (NPN) ( $V_{EB} = -0.5 \text{ Vdc}$ , $I_C = 0$ , $f = 1.0 \text{ MHz}$ ) (PNP)	$C_{ibo}$	– –	8.0 10.0	pF
Input Impedance ( $V_{CE} = 10 \text{ Vdc}$ , $I_C = 1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (NPN) ( $V_{CE} = -10 \text{ Vdc}$ , $I_C = -1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (PNP)	$h_{ie}$	1.0 2.0	10 12	$k\Omega$
Voltage Feedback Ratio ( $V_{CE} = 10 \text{ Vdc}$ , $I_C = 1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (NPN) ( $V_{CE} = -10 \text{ Vdc}$ , $I_C = -1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (PNP)	$h_{re}$	0.5 0.1	8.0 10	$\times 10^{-4}$
Small-Signal Current Gain ( $V_{CE} = 10 \text{ Vdc}$ , $I_C = 1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (NPN) ( $V_{CE} = -10 \text{ Vdc}$ , $I_C = -1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (PNP)	$h_{FE}$	100 100	400 400	–
Output Admittance ( $V_{CE} = 10 \text{ Vdc}$ , $I_C = 1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (NPN) ( $V_{CE} = -10 \text{ Vdc}$ , $I_C = -1.0 \text{ mAdc}$ , $f = 1.0 \text{ kHz}$ ) (PNP)	$h_{oe}$	1.0 3.0	40 60	$\mu\text{mhos}$
Noise Figure ( $V_{CE}=5.0 \text{ Vdc}$ , $I_C=100 \mu\text{Adc}$ , $R_S=1.0 \text{ k}\Omega$ , $f=1.0\text{kHz}$ ) (NPN) ( $V_{CE}=-5.0 \text{ Vdc}$ , $I_C=-100 \mu\text{Adc}$ , $R_S=1.0 \text{ k}\Omega$ , $f=1.0\text{kHz}$ ) (PNP)	NF	– –	5.0 4.0	dB

**SWITCHING CHARACTERISTICS**

Delay Time	( $V_{CC} = 3.0 \text{ Vdc}$ , $V_{BE} = -0.5 \text{ Vdc}$ ) (NPN)	$t_d$	–	35	ns
	( $V_{CC} = -3.0 \text{ Vdc}$ , $V_{BE} = 0.5 \text{ Vdc}$ ) (PNP)		–	35	
Rise Time	( $I_C = 10 \text{ mAdc}$ , $I_{B1} = 1.0 \text{ mAdc}$ ) (NPN)	$t_r$	–	35	
	( $I_C = -10 \text{ mAdc}$ , $I_{B1} = -1.0 \text{ mAdc}$ ) (PNP)		–	35	
Storage Time	( $V_{CC} = 3.0 \text{ Vdc}$ , $I_C = 10 \text{ mAdc}$ ) (NPN)	$t_s$	–	200	ns
	( $V_{CC} = -3.0 \text{ Vdc}$ , $I_C = -10 \text{ mAdc}$ ) (PNP)		–	225	
Fall Time	( $I_{B1} = I_{B2} = 1.0 \text{ mAdc}$ ) (NPN)	$t_f$	–	50	
	( $I_{B1} = I_{B2} = -1.0 \text{ mAdc}$ ) (PNP)		–	75	

**LMBT3946DW1T1**

**TYPICAL ELECTRICAL CHARACTERISTICS**  
**LMBT3946DW1T1**  
**(NPN)**

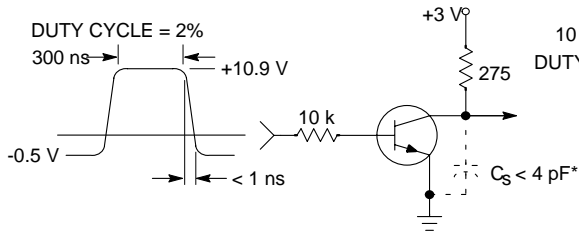


Figure 1. Delay and Rise Time Equivalent Test Circuit

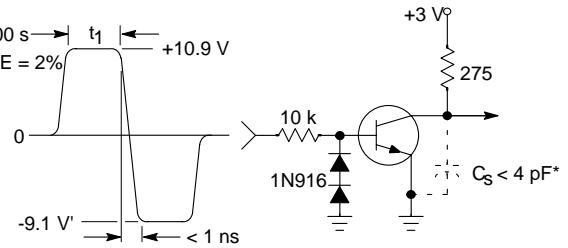


Figure 2. Storage and Fall Time Equivalent Test Circuit

\* Total shunt capacitance of test jig and connectors

**TYPICAL TRANSIENT CHARACTERISTICS**

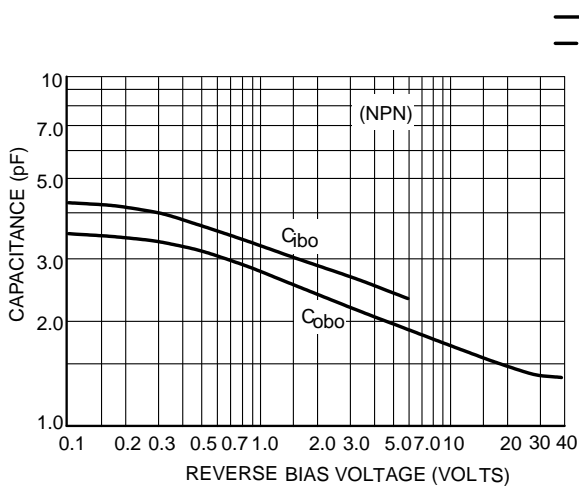


Figure 3. Capacitance


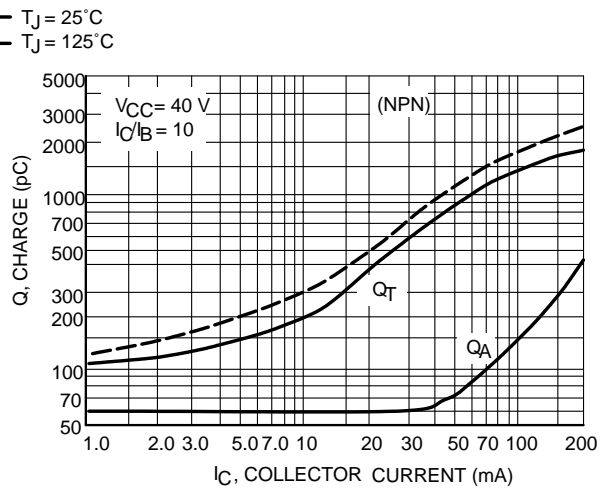


Figure 4. Charge Data


**LMBT3946DW1T1**

**TYPICAL ELECTRICAL CHARACTERISTICS**  
**LMBT3946DW1T1**


(NPN)

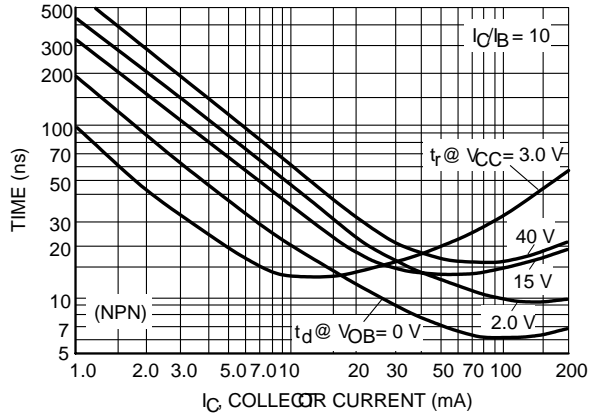


**Figure 5. Turn-on Time**

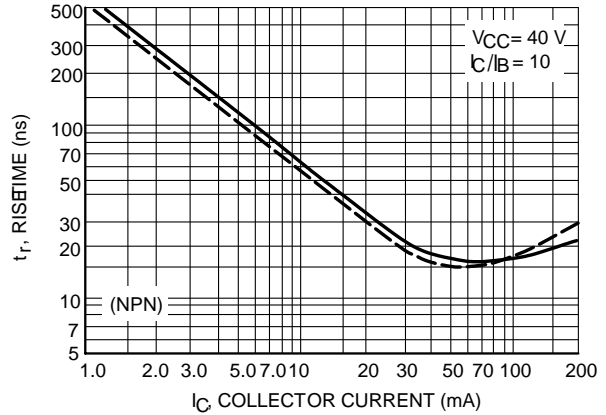

**Figure 6. Rise Time**

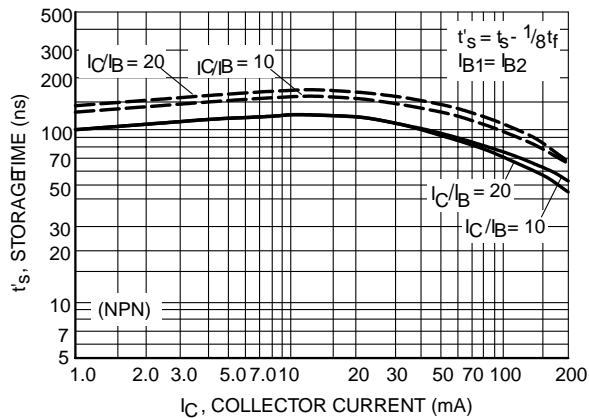


**Figure 7. Storage Time**

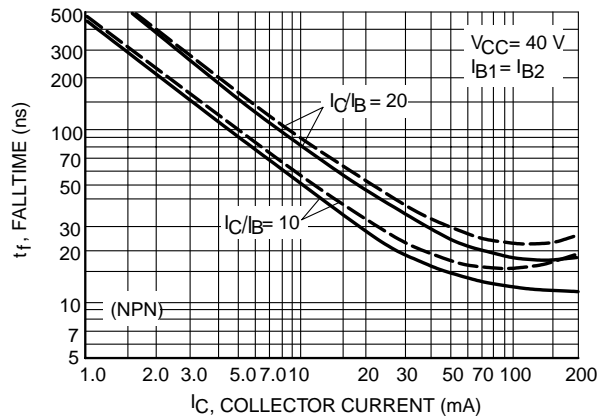


**Figure 8. Fall Time**

**TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS**  
**NOISE FIGURE VARIATIONS**

( $V_{CE} = 5.0 \text{ Vdc}$ ,  $T_A = 255^\circ\text{C}$ , Bandwidth = 1.0 Hz)

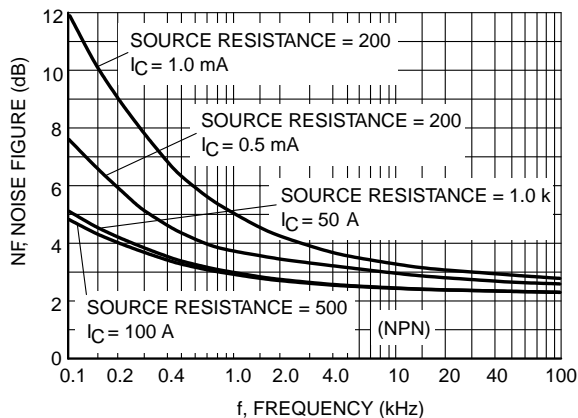

**Figure 9. Noise Figure**

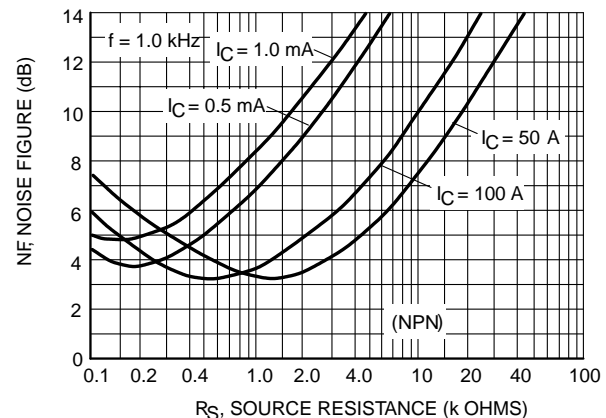

**Figure 10. Noise Figure**

**LMBT3946DW1T1**


**TYPICAL ELECTRICAL CHARACTERISTICS**

**LMBT3946DW1T1**


**(NPN)**

**h PARAMETERS**


( $V_{CE} = 10 \text{ Vdc}$ ,  $f = 1.0 \text{ kHz}$ ,  $T_A = 25^\circ\text{C}$ )

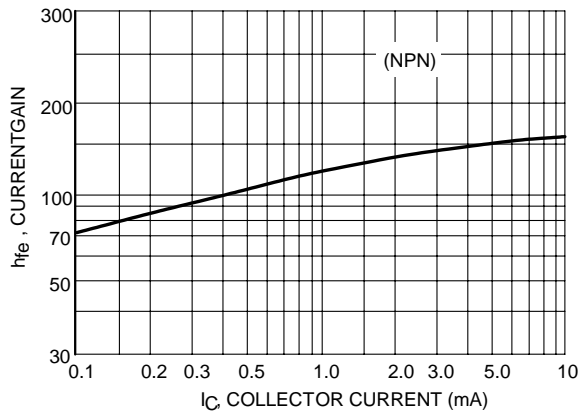


**Figure 11. Current Gain**

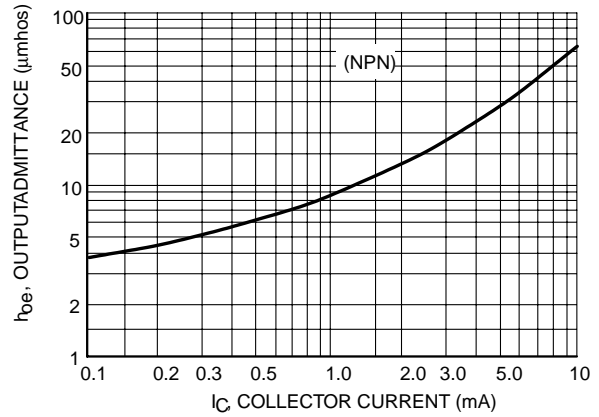

**Figure 12. Output Admittance**

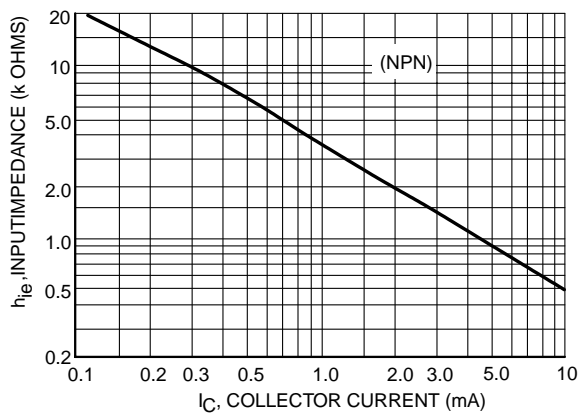

**Figure 13. Input Impedance**

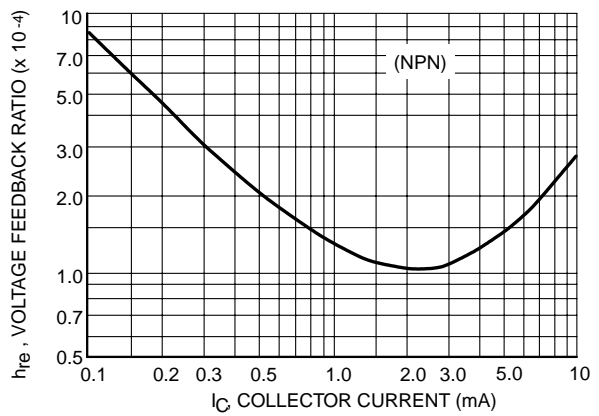


**Figure 14. Voltage Feedback Ratio**

**LMBT3946DW1T1**


**TYPICAL ELECTRICAL CHARACTERISTICS**

**LMBT3946DW1T1**


**(NPN)**

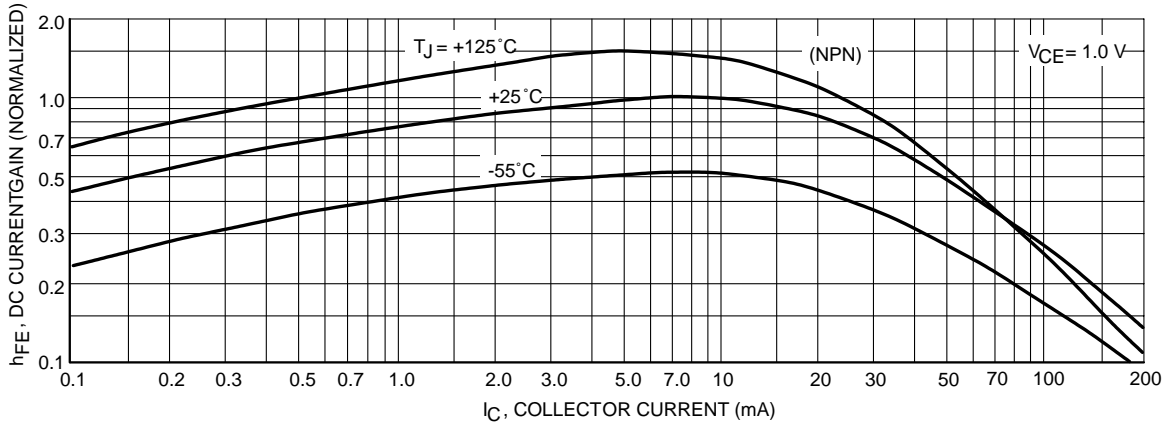


**Figure 15. DC Current Gain**

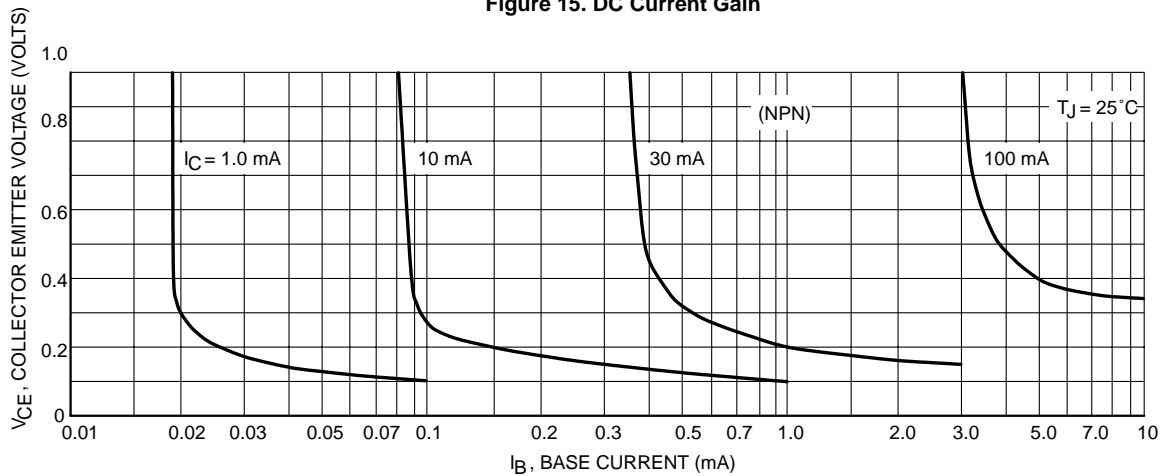

**Figure 16. Collector Saturation Region**

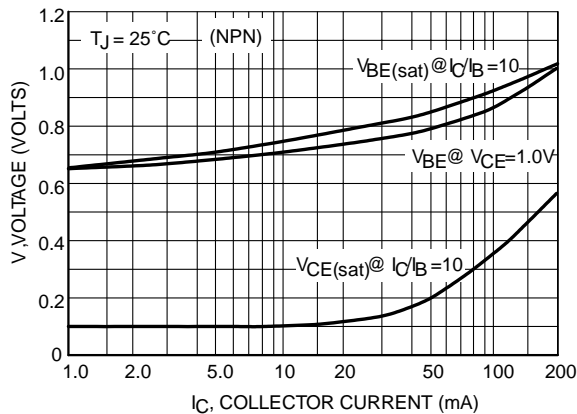

**Figure 17. "ON" Voltages**

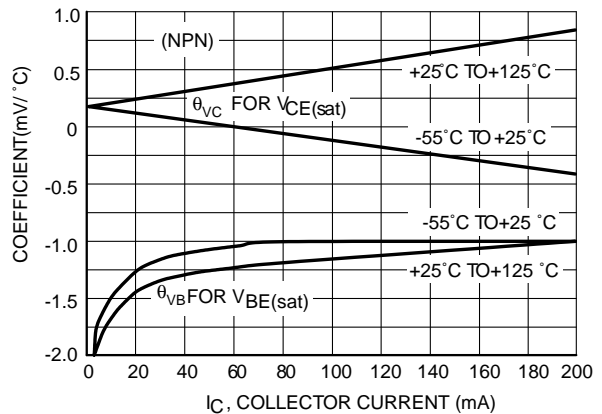


**Figure 18. Temperature Coefficients**


**LMBT3946DW1T1**

**TYPICAL ELECTRICAL CHARACTERISTICS**

**LMBT3946DW1T1  
(PNP)**

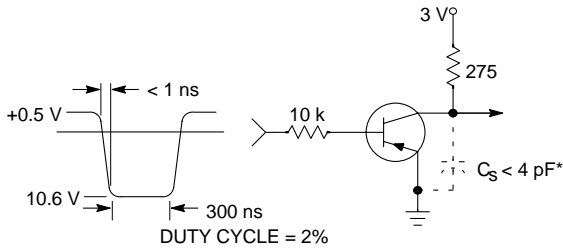

**Figure 19. Delay and Rise Time  
Equivalent Test Circuit**

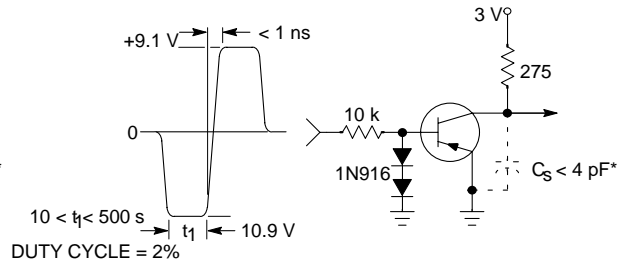


**Figure 20. Storage and Fall Time  
Equivalent Test Circuit**


\* Total shunt capacitance of test jig and connectors

**TYPICAL TRANSIENT CHARACTERISTICS**


—  $T_J = 25^\circ\text{C}$   
- -  $T_J = 125^\circ\text{C}$

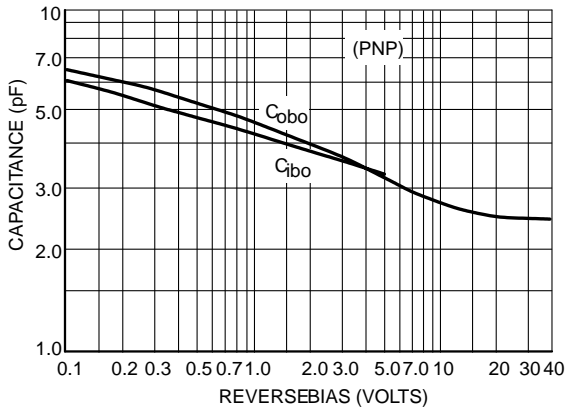


**Figure 21. Capacitance**

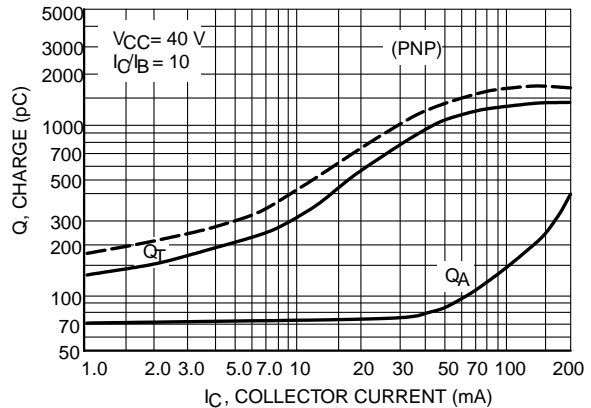

**Figure 22. Charge Data**

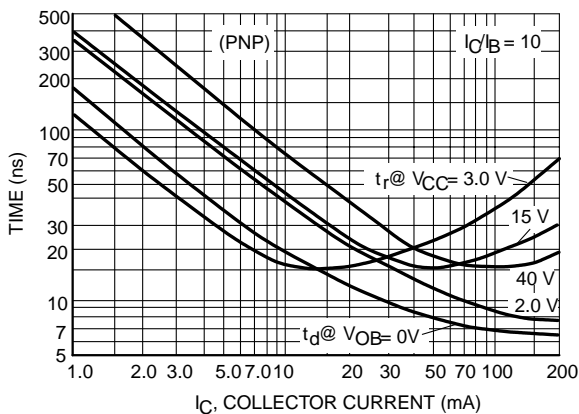

**Figure 23. Turn-On Time**

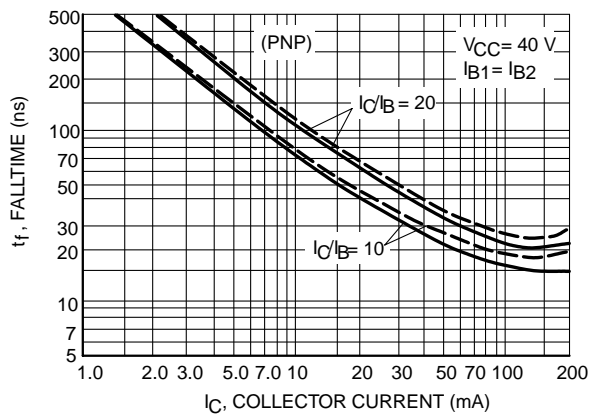

**Figure 24. Fall Time**



**LMBT3946DW1T1**

**TYPICAL ELECTRICAL CHARACTERISTICS**


**LMBT3946DW1T1**

**(PNP)**


**TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS**

**NOISE FIGURE VARIATIONS**

( $V_{CE} = \pm 5.0$  Vdc,  $T_A = 25^\circ\text{C}$ , Bandwidth = 1.0 Hz)

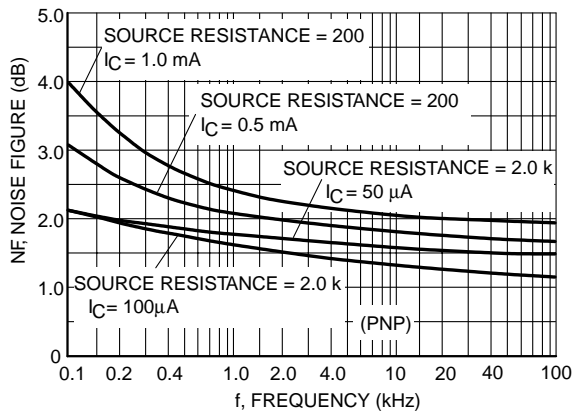


**Figure 25.**

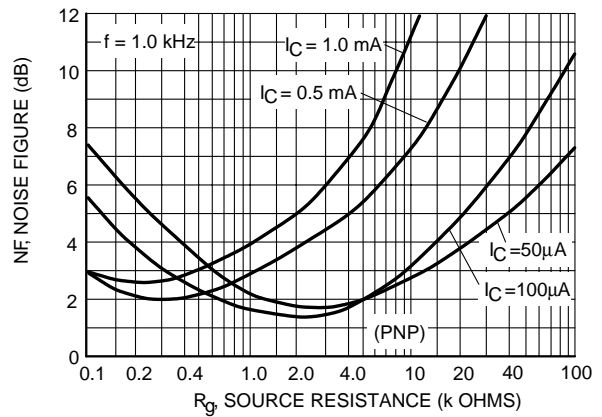


**Figure 26.**

**h PARAMETERS**


( $V_{CE} = \pm 10$  Vdc,  $f = 1.0$  kHz,  $T_A = 25^\circ\text{C}$ )

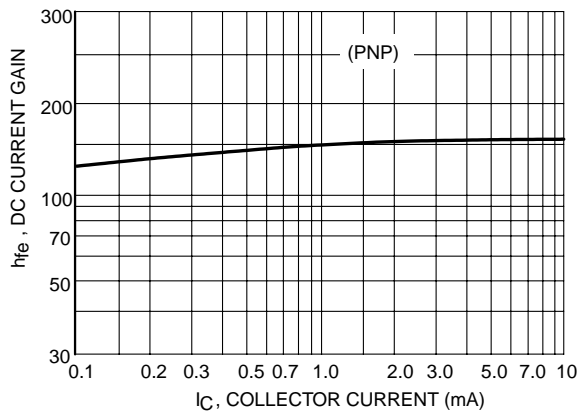


**Figure 27. Current Gain**

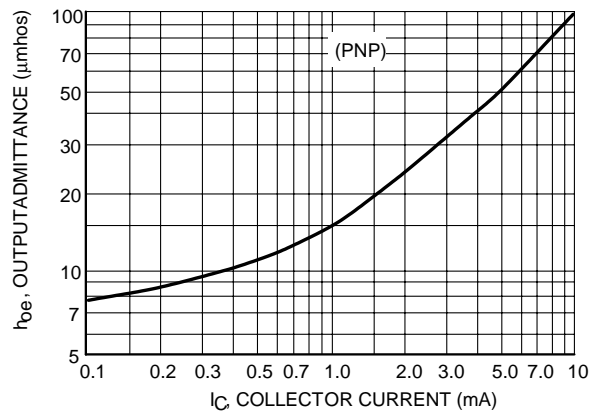

**Figure 28. Output Admittance**

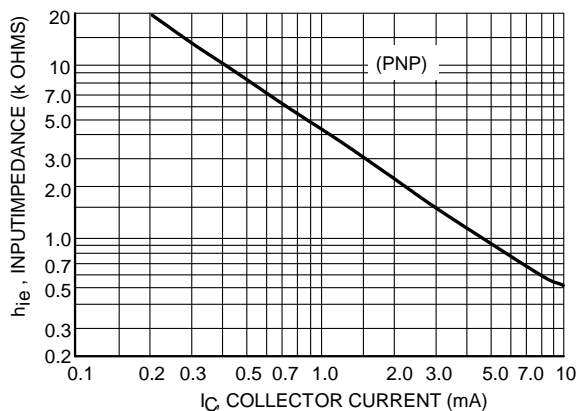

**Figure 29. Input Impedance**

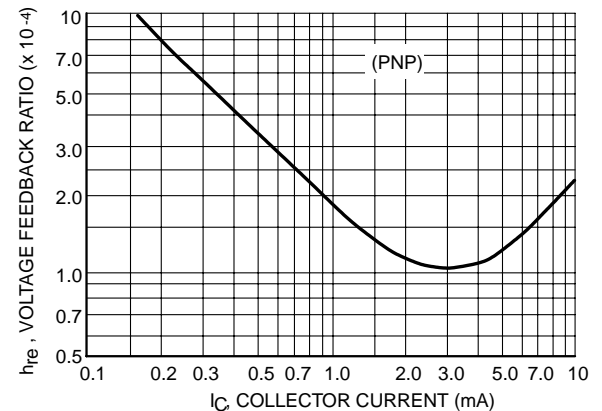

**Figure 30. Voltage Feedback Ratio**

**LMBT3946DW1T1**

**TYPICAL ELECTRICAL CHARACTERISTICS**  
**LMBT3946DW1T1**  
**(PNP)**

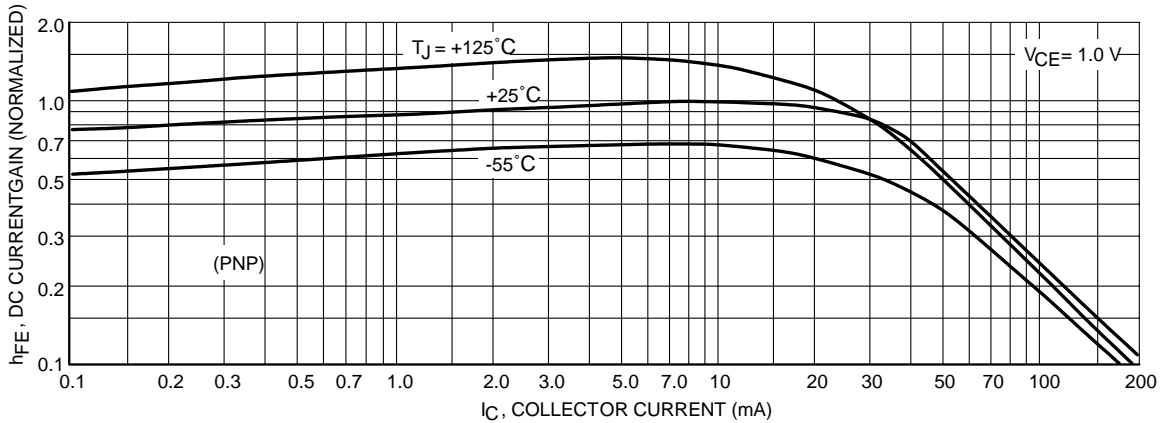


Figure 31. DC Current Gain

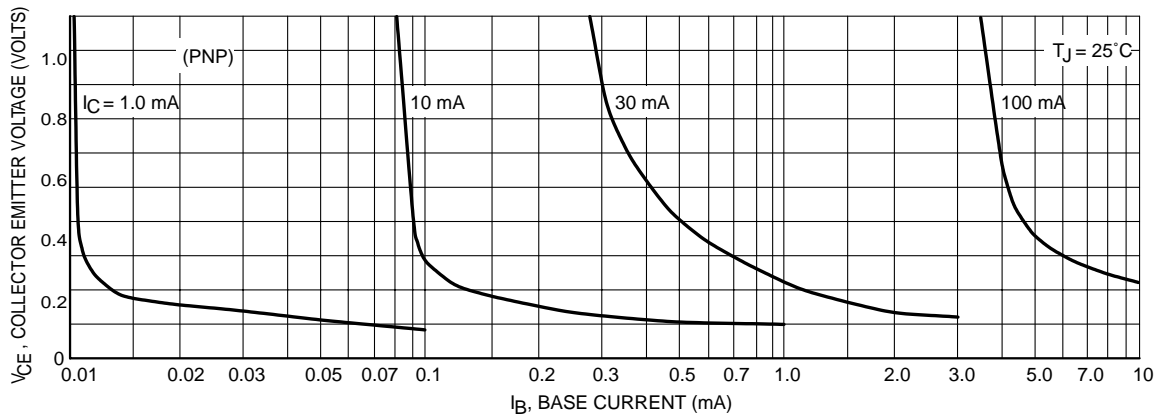


Figure 32. Collector Saturation Region

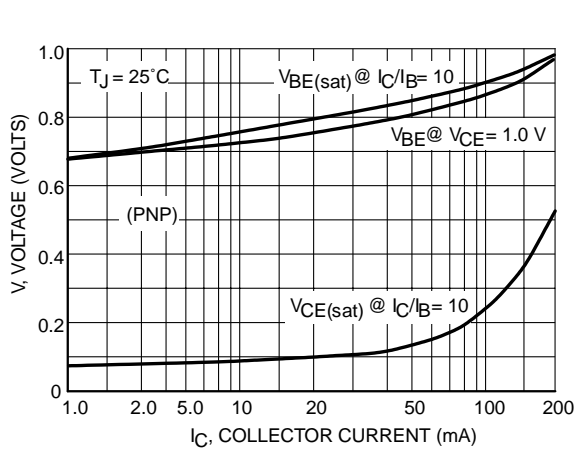


Figure 33. "ON" Voltages

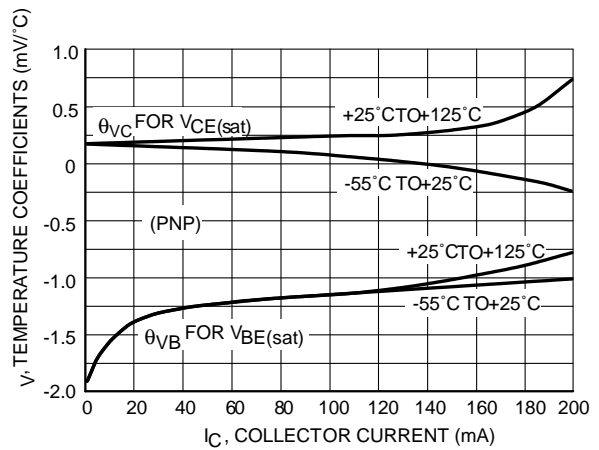



Figure 34. Temperature Coefficients

**LMBT3946DW1T1**

SC-88/SOT-363

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

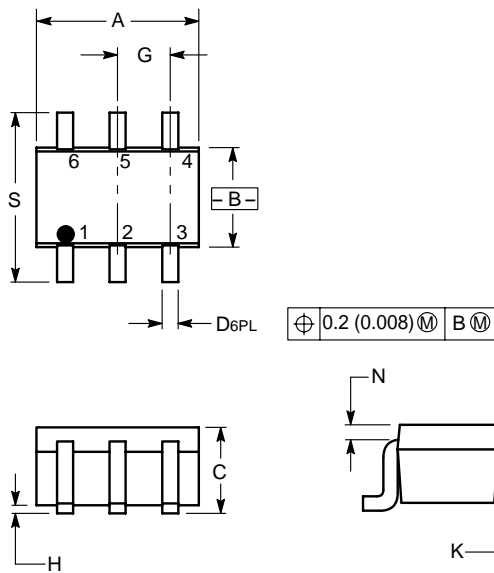

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.031	0.043	0.80	1.10
D	0.004	0.012	0.10	0.30
G	0.026 BSC		0.65 BSC	
H	---	0.004	---	0.10
J	0.004	0.010	0.10	0.25
K	0.004	0.012	0.10	0.30
N	0.008 REF		0.20 REF	
S	0.079	0.087	2.00	2.20

- PIN 1. EMITTER 2  
 2. BASE 2  
 3. COLLECTOR 1  
 4. EMITTER 1  
 5. BASE 1  
 6. COLLECTOR 2

