

## Features

## ICE Technology\*

- Up to 96°C ambient, no derating
- 120°C Maximum Case Temperature
- -45°C Minimum Operating Temperature
- Built-in FCC/EN55022 Class B Filter
- 2:1 Wide Input Voltage Range
- Six Sided Shielded Enclosure
- Compact 50.8x30.5x11.7mm Package
- Efficiency to 92%
- 3kVDC Isolation
- Fully Protected
- Low Quiescent Current

### Description

The RPP30 series 2:1 input range DC/DC converters are ideal for high end industrial applications and COTS Military applications where a high ambient operating temperature converter is required.

Although the case size is compact, the converter contains a built-in EN55022 Class B / FCC Level B EMC filter without the need for any external components.


### Selection Guide 12V, 24V and 48V Input Types

| Part Number  | Input Range VDC | Output Voltage VDC | Output Current mA | Input <sup>(1)</sup> Current mA | Efficiency <sup>(2)</sup> | Max <sup>(3)</sup> Operating Temp |
|--------------|-----------------|--------------------|-------------------|---------------------------------|---------------------------|-----------------------------------|
| RPP30-123.3S | 9-18            | 3.3                | 8500              | 78/2666                         | 87.5%                     | 86°C                              |
| RPP30-1205S  | 9-18            | 5                  | 6000              | 109/2768                        | 90.3%                     | 91°C                              |
| RPP30-1212S  | 9-18            | 12                 | 2500              | 26/2784                         | 89.8%                     | 89°C                              |
| RPP30-1215S  | 9-18            | 15                 | 2000              | 31/2775                         | 90.1%                     | 91°C                              |
| RPP30-243.3S | 18-36           | 3.3                | 8000              | 59/1394                         | 89.7%                     | 89°C                              |
| RPP30-2405S  | 18-36           | 5                  | 6000              | 62/1372                         | 91.1%                     | 93°C                              |
| RPP30-2412S  | 18-36           | 12                 | 2500              | 18/1400                         | 90.4%                     | 91°C                              |
| RPP30-2415S  | 18-36           | 15                 | 2000              | 18/1380                         | 91.4%                     | 94°C                              |
| RPP30-483.3S | 36-75           | 3.3                | 8000              | 24/697                          | 89.6%                     | 89°C                              |
| RPP30-4805S  | 36-75           | 5                  | 6000              | 37/680                          | 92.0%                     | 96°C                              |
| RPP30-4812S  | 36-75           | 12                 | 2500              | 11/687                          | 91.0%                     | 94°C                              |
| RPP30-4815S  | 36-75           | 15                 | 2000              | 12/682                          | 91.6%                     | 94°C                              |
| RPP30-1212D  | 9-18            | ±12                | ±1250             | 29/2790                         | 89.6%                     | 89°C                              |
| RPP30-1215D  | 9-18            | ±15                | ±1000             | 33/2784                         | 89.8%                     | 89°C                              |
| RPP30-2412D  | 18-36           | ±12                | ±1100             | 20/1300                         | 88.4%                     | 86°C                              |
| RPP30-2415D  | 18-36           | ±15                | ±1000             | 10/1392                         | 89.8%                     | 89°C                              |
| RPP30-2424D  | 18-36           | ±24                | ±600              | 10/1384                         | 90.3%                     | 91°C                              |
| RPP30-4812D  | 36-75           | ±12                | ±1150             | 11/647                          | 88.8%                     | 87°C                              |
| RPP30-4815D  | 36-75           | ±15                | ±1000             | 12/689                          | 90.7%                     | 94°C                              |
| RPP30-4824D  | 36-75           | ±24                | ±550              | 26/622                          | 88.4%                     | 86°C                              |

### Derating Graph (Ambient Temperature)

#### RPP30-4805S

Derating graphs are valid only for the shown part numbers. Please contact Technical Support for more information [info@recom-development.at](mailto:info@recom-development.at)

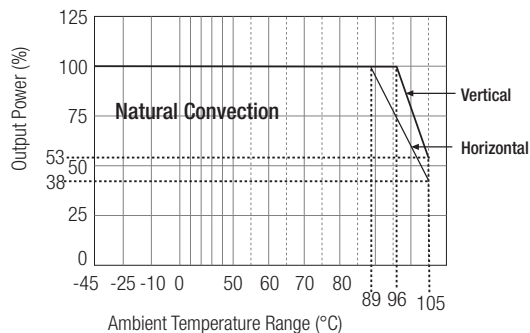

#### \* ICE Technology

**ICE (Innovation in Converter Excellence) uses state-of-the-art techniques to minimise internal power dissipation and to increase the internal temperature limits to extend the ambient operating temperature range to the maximum. Refer to end of section for more details.**

## POWERLINE+ DC/DC-Converter

**RECOM**

## 30 Watt Single & Dual Output



**UL-60950-1 Pending**

# RPP30

Refer to Application Notes

# POWERLINE+

## DC/DC-Converter

# RPP30-S\_D

## Series

### Specifications (typical at nominal input and 25°C unless otherwise noted)

|  |   |  |         |
|--|---|--|---------|
| Input Voltage Range  | 12V nominal input   | 9-18VDC                                |         |
|  | 24V nominal input   | 18-36VDC                               |         |
|  | 48V nominal input   | 36-75VDC                               |         |
| Under Voltage Lockout  | 12V input   | DC-DC ON (min.)                        | 8.5VDC  |
|  |   | DC-DC OFF (max.)                       | 8VDC    |
|  | 24V input   | DC-DC ON (min.)                        | 17.5VDC |
|  |   | DC-DC OFF (max.)                       | 17VDC   |
|  | 48V input   | DC-DC ON (min.)                        | 35VDC   |
|  |   | DC-DC OFF (max.)                       | 34VDC   |
| Input Filter   | Common Mode EMCType   |  |         |
| Input Voltage Variation dv/dt (Complies with ETS300 132 part 4.4)                          | 5V/ms max   |  |         |
| Input Surge Voltage (100 ms max.)  | 12V, 24V Input  | 50VDC                                  |         |
|  | 48V Input   | 100VDC                                 |         |
| Input Reflected Ripple   | nominal Vin and full load                                   | 30mAp-p                                |         |
| Start Up Time  | nominal Vin and constant resistor load                      | 2ms typ., 5ms max.                     |         |
| Remote ON/OFF <sup>(4)</sup>   | DC-DC ON  | Open or 3.0V < Vr < 5.5V               |         |
|  | DC-DC OFF   | Short or 0V < Vr < 1.2V                |         |
| Remote OFF input current   | Nominal input   | 2mA typ.                               |         |
| Output Power   | 30W max.  |  |         |
| Output Voltage Accuracy  | 50% Load and nominal Vin                                    | ±1.5%                                  |         |
| Voltage Adjustability  | Single Output only  | ±10%                                   |         |
| Minimum Load   | 0%  |  |         |
| Line Regulation  | low line, high line at full load                            | ±0.3%                                  |         |
| Load Regulation  | 10% to 100% full load                                       | ±0.5%                                  |         |
| Cross Regulation (10% <> 100% Load)  | Dual Outputs only   | 3% typ./ 5% max.                       |         |
| Ripple and Noise (20MHz bandwidth limited)<br>(measured with 1µF capacitor across outputs) | 3.3V, 5V  | 60mVp-p typ.                           |         |
|  | All others  | 25mV-45mVp-p max.                      |         |
| Temperature Coefficient  | ±0.04%/°C max.  |  |         |
| Transient Response   | 25% load step change  | 800µs                                  |         |
| Over Load Protection   | % of full load at nominal Vin                               | 120% typ.                              |         |
| Short Circuit Protection   | Hiccup, automatic recovery                                  |  |         |
| Output Over Voltage Protection (refer to block diagram in Application Notes)               | Converter shutdown if Vout > Vout nominal + 20%             |  |         |
| Isolation Voltage  | Rated at 2250VDC/1 minute, Flash tested at 3000VDC/1 second |  |         |
| Isolation Resistance   | 10MΩ min.   |  |         |
| Isolation Capacitance (refer to block diagram in Application Notes)                        | 3000pF max.   |  |         |
| Operating Frequency  | 260kHz ± 40kHz  |  |         |
| Operating Temperature Range  | Ambient, Free Convection                                    | -45°C to +96°C max (without derating)  |         |
|  |   | -45°C to +105°C max (without derating) |         |
| Maximum Case Temperature   | +120°C  |  |         |
| Storage Temperature Range  | -55°C to +125°C   |  |         |
| Over Temperature Protection (refer to block diagram in Application Notes)                  | internal thermistor   |  |         |
| Thermal Impedance<br>(Natural convection)  | Vertical  | 7.3°C/Watt                             |         |
|  | Horizontal  | 10°C/Watt                              |         |
| Relative Humidity  | 5% to 95% RH  |  |         |
| Case Material <sup>(7)</sup>   | Aluminium   |  |         |
| Potting Material   | Silicone (UL94-V0)  |  |         |

continued on next page

RPP30

# POWERLINE+

## DC/DC-Converter

# RPP30-S\_D Series

**Specifications** (typical at nominal input and 25°C unless otherwise noted)

|  |  |  |
|--|--|--|
| Weight   |  | 34g                                      |
| Packing Quantity   | Refer to App Notes for tube dimensions | 7 pcs per Tube                           |
| Dimensions   |  | 2" x 1.2" x 0.48" (50.8 x 30.5 x 11.7mm) |
| Safety Standards   |  | UL-60950-1 Pending                       |
| Thermal Cycling  |  | complies with MIL-STD-810F               |
| Vibration  |  | 10-55Hz, 12G, 30 Min. along X, Y and Z   |
| Conducted Emissions  | EN55022                                | Class B                                  |
| Radiated Emissions   | EN55022                                | Class B                                  |
| ESD  | EN61000-4-2                            | Perf. Criteria B                         |
| Radiated Immunity  | EN61000-4-3                            | Perf. Criteria A                         |
| Fast Transient <sup>(5)</sup>                                      | EN61000-4-4                            | Perf. Criteria B                         |
| Surge <sup>(5)</sup>   | EN61000-4-5                            | Perf. Criteria B                         |
| Conducted Immunity   | EN61000-4-6                            | Perf. Criteria A                         |
| MTBF calculated according to BELLCORE TR-NWT-000332 <sup>(6)</sup> |  | 2195 x 10 <sup>3</sup> hours             |


### Notes :

1. Typical values at nominal input voltage and no load/full load.
2. Typical values at nominal input voltage and full load.
3. Typical values at nominal input voltage and full load in vertical orientation and with Eurocard-sized PCB ground planes to assist in heat dissipation. For horizontal orientation, reduce the maximum temperatures by 10°C.
4. The ON/OFF control function can be positive or negative logic. The pin voltage is referenced to negative input.
  - Positive logic ON/OFF is standard, no suffix (Ex. RPP20-2405S)
  - Negative logic ON/OFF option has suffix /N (Ex. RPP20-2405S/N)
5. Requires an external 100µF/100V low ESR capacitor to meet EN61000-4-4 and EN61000-4-5
6. Case I: 50% Stress, Temperature at 50°C (Ground Benign).
7. To ensure a good all-round electrical contact, the baseplate is pressed firmly into place within the aluminium housing. The hydraulic press can leave tooling marks and deformations to both the housing and baseplate. The case is anodised aluminium, so there will be natural variations in the case colour and the aluminium is not scratch resistant. Any resultant marks, scratches and colour variations are cosmetic only and do not affect the operation or performance of the converters.


RPP30

### Recommended PCB Layout

#### Single Output

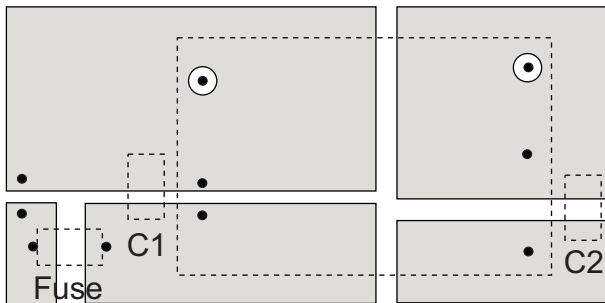

#### Dual Output

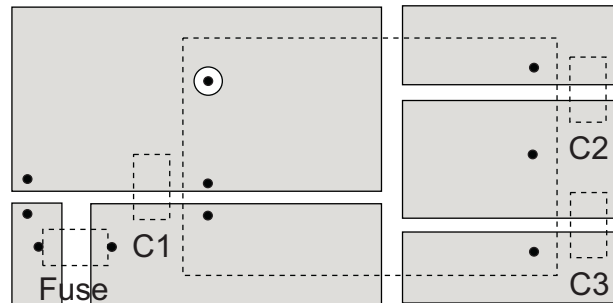

Input Fuse is recommended, but optional. Recommended fuse rating = double maximum input current, time delay type.



Input Capacitor, C1, is required to meet EN61000 Surge and Fast Transient, otherwise it is not required for normal operation.

Output Capacitors C2/C3 are recommended, but not required for normal operation. Typical capacitor values are 1µF/100V MLCC

To ensure optimum thermal performance, use large areas of copper on the PCB to assist with heat dissipation and mount the converter vertically.




Typical Characteristics

## RPP30-4805S

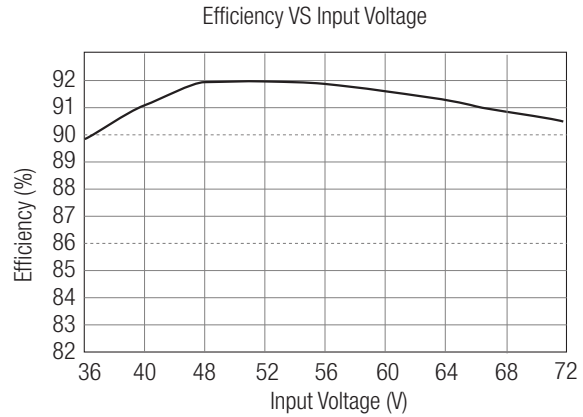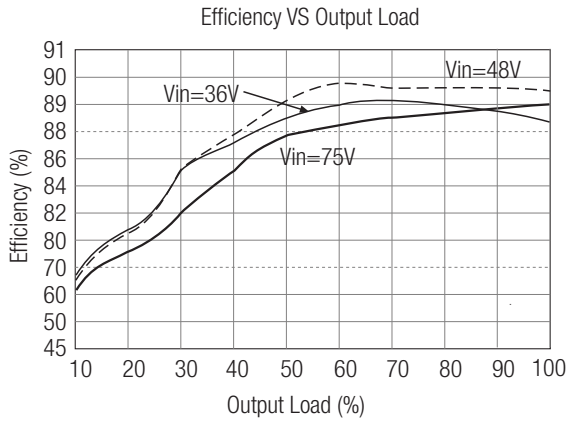

Package Style and Pinning (mm)

RPP-30

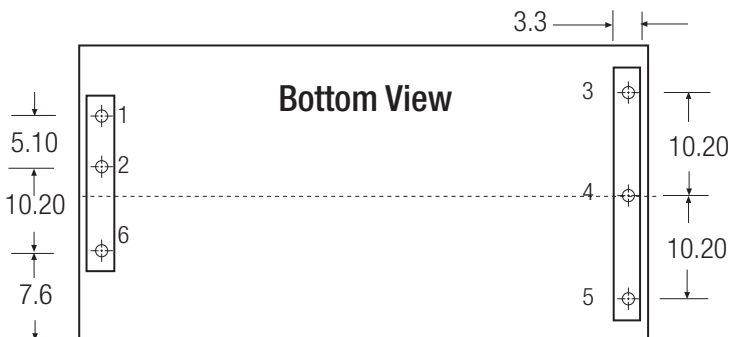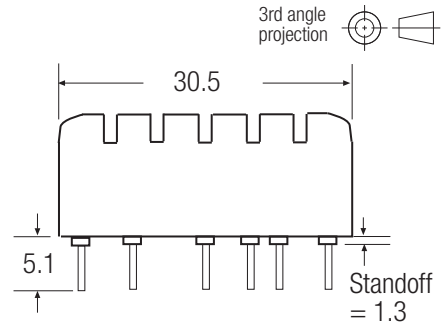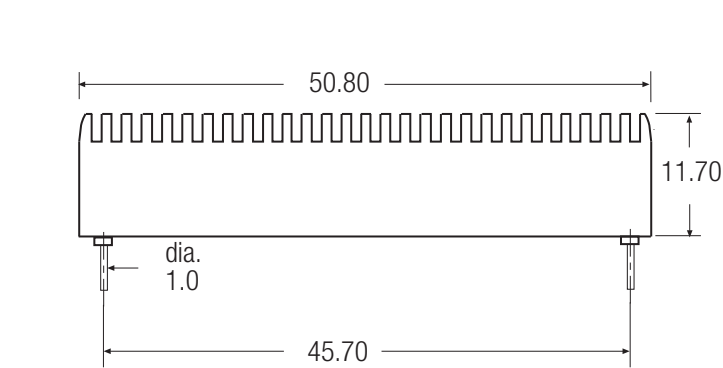

Pin Connections

| Pin # | Single | Dual  |
|-------|--------|-------|
| 1     | +Vin   | +Vin  |
| 2     | -Vin   | -Vin  |
| 3     | +Vout  | +Vout |
| 4     | -Vout  | Com   |
| 5     | Trim   | -Vout |
| 6     | CTRL   | CTRL  |

Pin Pitch Tolerance  $\pm 0.35$  mm

### External Output Trimming

Refer to Application Notes for suggested resistor values

