


SANTA ANA, CA

SCOTTSDALE, AZ For more information call: (602) 941-6300

SAC5.0 thru SAC50

LOW CAPACITANCE **TRANSIENT ABSORPTION ZENER**

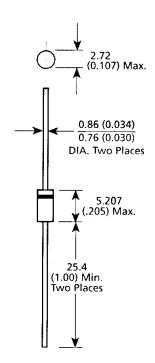

NOTE: Cathode indicated by band.

Mechanical Characteristics

CASE: Void Free Transfer Molded Thermosetting Plastic. (DO-41)

FINISH: All External Surfaces Are Corrosion Resistant And Leads Solderable.

POLARITY: Cathode Marked With Band.

WEIGHT: 0.5 Grams (Appx.).

4-61

MOUNTING POSITION:

Any.

Features

- 500 WATTS PEAK PULSE POWER
- LOW CAPACITANCE
- SMALL SIZE (DO-41)
- ECONOMICAL SERIES

Maximum Ratings

Peak Pulse Power Dissipation at 25°C: 500 Watts Steady State Power Dissipation at $T_1 = +75^{\circ}C$: 2.5 Watts (Lead Length=3/8") Clamping Speed (0 volts to V_(BR) Min.) less than 5 nanoseconds Operating and Storage Temperature: -65°C to +175°C

Application

The SAC series TAZ is a low capacitance transient voltage suppressor rated at 500 Watts, providing board level protection for data or signal lines. The low capacitance rating of 50 pF minimizes the amount of signal loss or deformation up through 70 MHz.

Electrical Characteristics at 25°C

MICROSEMI PART NUMBER	REVERSE STAND-OFF VOLTAGE (Note 1) V WM Volts	BREAKDOWN VOLTAGE O IT 1.0mA V(BR) Volts Min.	MAXIMUM REVERSE LEAKAGE Vwm ID µA	MAXIMUM CLAMPING VOLTAGE * Ip = 5.0A Vc Volts	MAXIMUM PEAK PULSE CURRENT * RATING IPP Amps	CAPACITANCE © 0 Voits pf	WORKING INVERSE BLOCKING VOLTAGE VWIB Volts	INVERSE BLOCKING LEAKAGE CUHRENT WW18 I _{IB} mA	PEAK INVERSE BLOCKING VOLTAGE V _{PIB} Volts
SAC5.0	5.0	7.60	300	10.0	44	50	75	1	100
SAC6.0	6.0	7.90	300	11.2	41	50	75	1	100
SAC7.0	7.0	8.33	300	12.6	38	50	75	1	100
SAC8.0	8.0	8.89	100	13.4	36	50	75		100
SAC8.5	8.5	9, 44	50	14.0	34	50	75	1	100
SAC10	10	11.10	5.0	16.3	29	50	75		100
SAC12	12	13.30	5.0	19.0	25	50	75	1	100
SAC15	15	16.70	5.0	23.6	20	50	75		100
SAC18	18	20.00	5.0	28.8	15	50	75	1	100
SAC22	22	24.40	5.0	35.4	14	50	75		100
SAC26	26	28.90	5.0	42.3	11.1	50	75	1	100
SAC36	36	40.00	5.0	60.0	8.6	50	75		100
SAC45	45	50.00	5.0	77.0	6.8	50	150	1	200
SAC50	50	55.50	5.0	88.0	5.8	50	150		200

^{*} See Figure 4.

Clamping Factor: 1.4 @ full rated power, 1.20 @ 50% rated power. The ratio of the actual clamping voltage (V_C) to the actual breakdown voltage (V_(BR)).

 $\textbf{Note1:} \ \ \textbf{A transient voltage suppressor is normally selected according voltage (V_{wm}), which}$ should be equal to or greater than the dc or continuous peak operating voltage level.

Note 2: When pulse testing, test in TVS avalanche direction. Do not pulse in "forward" direction.

Note 3: For bidirectional devices, consult factory.

All dimensions in millimeters (inches).

SAC5.0 thru SAC50

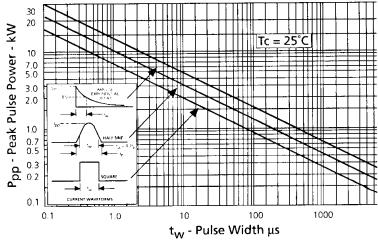


FIGURE 2

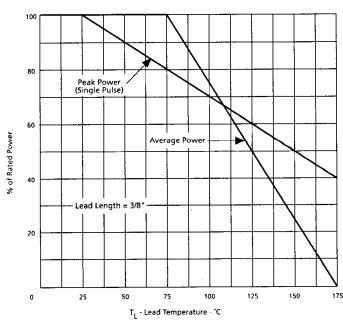


FIGURE 3

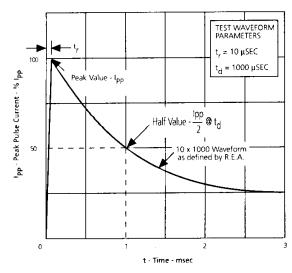


FIGURE 4
Pulse Waveform

