


## ADVANCED PRODUCT DATA

### FEATURES

- Small 8-pin DIP package
- 200ns max. acquisition time to ±0.01%
- 100ns max. sample-to-hold settling time to ±0.01%
- 16MHz small signal bandwidth
- 74dB feedthrough attenuation
- ±25 picoseconds aperture uncertainty
- 415mW maximum power dissipation



### GENERAL DESCRIPTION

Murata Power Solution's SHM-49 is a high-speed, highly accurate sample/hold designed for precision, high-speed analog signal processing applications. The SHM-49 features excellent dynamic specifications including a maximum acquisition time of only 200 nanoseconds for a 10V step to ±0.01%.

Sample-to-hold settling time, to ±0.01% accuracy, is 100 nanoseconds maximum with an aperture uncertainty of ±2 picoseconds.

The SHM-49 is a complete sample/hold circuit, containing a precision MOS hold capacitor and a MOSFET switching configuration which results in faster switching and better feedthrough attenuation. Additionally, a FET input amplifier design allows faster acquisition and settling times while maintaining a considerably lower droop rate.

### INPUT/OUTPUT CONNECTIONS

Pin	Function
1	+5v Digital Supply
2	S/H Control
3	Analog Input
4	Analog Return
5	-15v Supply
6	Analog Output
7	+15v Analog Supply
8	Power Ground

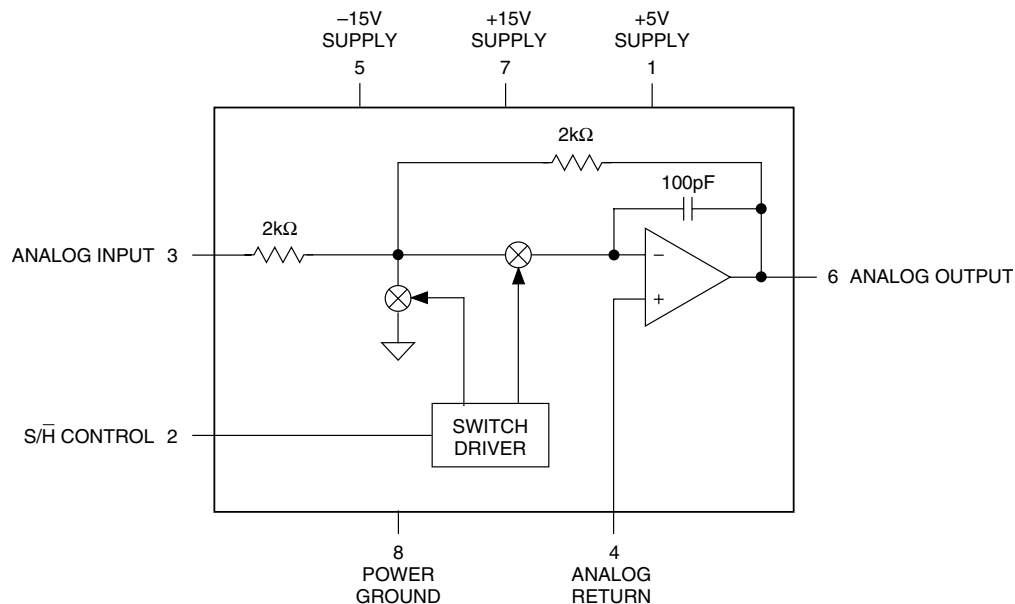


Figure 1. Functional Block Diagram

**Absolute Maximum Ratings**

±15V Supply Voltages	±18V
+5V Supply Voltages	-0.5V to +7V
Analog Input	±18V
Digital Input	-0.5V to +5.5V
Output Current	±65 mA

**Functional Specifications**

(Apply over the operating temperature range with ±15V and +5V supplies unless otherwise specified.)

ANALOG INPUT/OUTPUT	MIN.	TYP.	MAX.	UNITS
<b>Input/Output Voltage Range</b>				
±15V Nominal Supply	±10	±11.5	—	Volts
±12V Nominal Supply	±7	±8.5	—	Volts
<b>Input Impedance</b>	—	1000	—	Ω
<b>Output Current</b>	—	—	±65	mA
<b>Output Impedance</b>	—	0.1	—	Ω
<b>Capacitive Load</b>	100	250	—	pF

DIGITAL INPUT				
<b>Input Logic Levels</b>				
Logic 1	+2.0	—	+5.0	Volts
Logic 0	0	—	+0.8	Volts
<b>Loading</b>				
Logic 1	—	—	+5	μA
Logic 0	—	—	-5	μA

TRANSFER CHARACTERISTICS				
<b>Gain</b>	—	-1	—	V/V
<b>Gain Error, +25°C</b>	—	±0.05	±0.5	%
<b>Linearity Error ①</b>	—	±0.005	±0.01	%FS
<b>Sample Mode Offset, +25°C</b>	—	±2	7	mV
<b>Sample-to-Hold Offset (Pedestal), +25°C ②</b>	—	±2.5	±25	mV
<b>Gain Drift</b>	—	±0.5	±15	ppm/°C
<b>Sample Mode Offset Drift ①</b>	—	±3	±15	ppm of FSR/°C
<b>Sample-to-Hold Off. (Pedestal) Drift</b>	—	±5	±20	ppm of FSR/°C

DYNAMIC CHARACTERISTICS				
<b>Acquisition Time</b>				
10V to ±0.01%FS (±1 mV)				
+25°C	—	160	200	ns
-55 to +125°C	—	—	265	ns
10V to ±0.1%FS (±10 mV)				
+25°C	—	100	150	ns
-55 to +125°C	—	—	215	ns
10V to ±0.01%FS (±100 mV)				
1V to ±1%FS (±10 mV)	—	75	—	ns
<b>Sample-to-Hold Settling Time</b>				
10V to ±1%FS (±100 mV)	—	60	100	ns
1V to ±0.01%FS (±10 mV)	—	40	80	ns
<b>Sample-to-Hold Transient</b>	—	100	—	mVp-p
<b>Aperture Delay Time</b>	—	10	15	ns
<b>Aperture Uncertainty (Jitter)</b>	—	±25	±50	ps
<b>Output Slew Rate</b>	±200	±300	—	V/μs
<b>Small Signal BW (-3dB)</b>	10	16	—	MHz
<b>Output Droop</b>				
+25°C	—	±0.5	±15	μV/μs
0 to +70°C	—	±15	±30	μV/μs
-55 to +125°C	—	±1.2	±2.4	mV/μs
<b>Feedthrough Rejection</b>	69	74	—	dB

POWER REQUIREMENTS	MIN.	TYP.	MAX.	UNITS
<b>Voltage Range</b>				
+15V Supply	+11.5	+15.0	+15.5	Volts
-15V Supply	-11.5	-15.0	-15.5	Volts
+5V Supply	+4.75	+5.0	+5.25	Volts
<b>Power Supply Rejection Ratio</b>	—	±0.5	±1	mV/V
<b>Quiescent Current Drain</b>				
+15V Analog Supply	—	+12	+13.5	mA
-15V Supply	—	-12	-13.5	mA
+5V Supply	—	+1	-1.5	Volts
<b>Power Consumption</b>	—	365	415	mW
PHYSICAL/ENVIRONMENTAL				
<b>Operating Temp. Range, Case</b>				
SHM-49MC			0 to +70°C	
SHM-49MM			-55 to +125°C	
<b>Storage Temperature Range</b>			-65 to +150°C	
<b>Thermal Impedance</b>				
θjc			15°C/W	
θca			35°C/W	
<b>Package Type</b>			8-pin ceramic DIP	

**Footnotes:**

- ① Full Scale (FS) = 10V. Full Scale Range (FSR) = 20V.
- ② Sample-to-hold offset error (pedestal) is constant regardless of input/output level.

**Ordering Information**

MODEL	OPERATING TEMP. RANGE
<b>SHM-49MC</b>	0 to +70°C
<b>SHM-49MM</b>	-55 to +125°C
For availability of high-reliability versions of the SHM-49, contact Murata Power Solutions.	

**TECHNICAL NOTES**

- All ground pins should be tied together and connected to system analog ground as close to the package as possible. It is recommended to use a ground plane under the device and solder ground pins directly to it. Take care to ensure that no ground potentials can exist between ground pins.
- External 0.1μF to 4.7μF tantalum bypass capacitors are required in critical applications.
- A logic 1 on S/H puts the unit in the sample mode. A logic 0 puts the unit in hold mode. \_
- The maximum capacitive load to avoid oscillation is typically 250pF. Recommended resistive load is 500Ω, although values as low as 250Ω may be used. Acquisition and sample-to-hold settling times are relatively unaffected by resistive loads down to 250Ω and capacitive loads up to 50pF. Greater load capacitances will affect both acquisition and settling time.
- Gain and offset adjusting can be accomplished using the external circuitry shown in Figure 2. Adjust offset with a 0V input. Adjust gain with a ±FS input. Adjust so that the output in the hold mode matches the input.


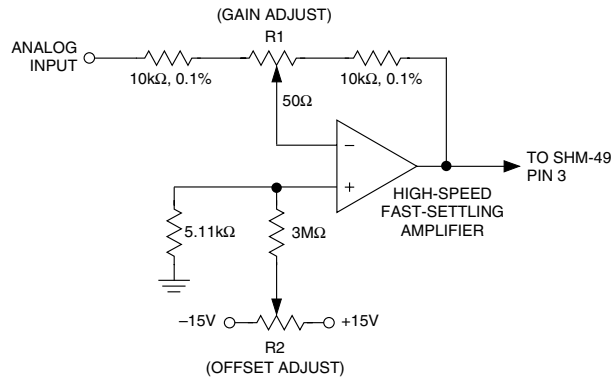


Figure 2. Offset and Gain Adjustments

**MECHANICAL DIMENSIONS** Inches (mm)

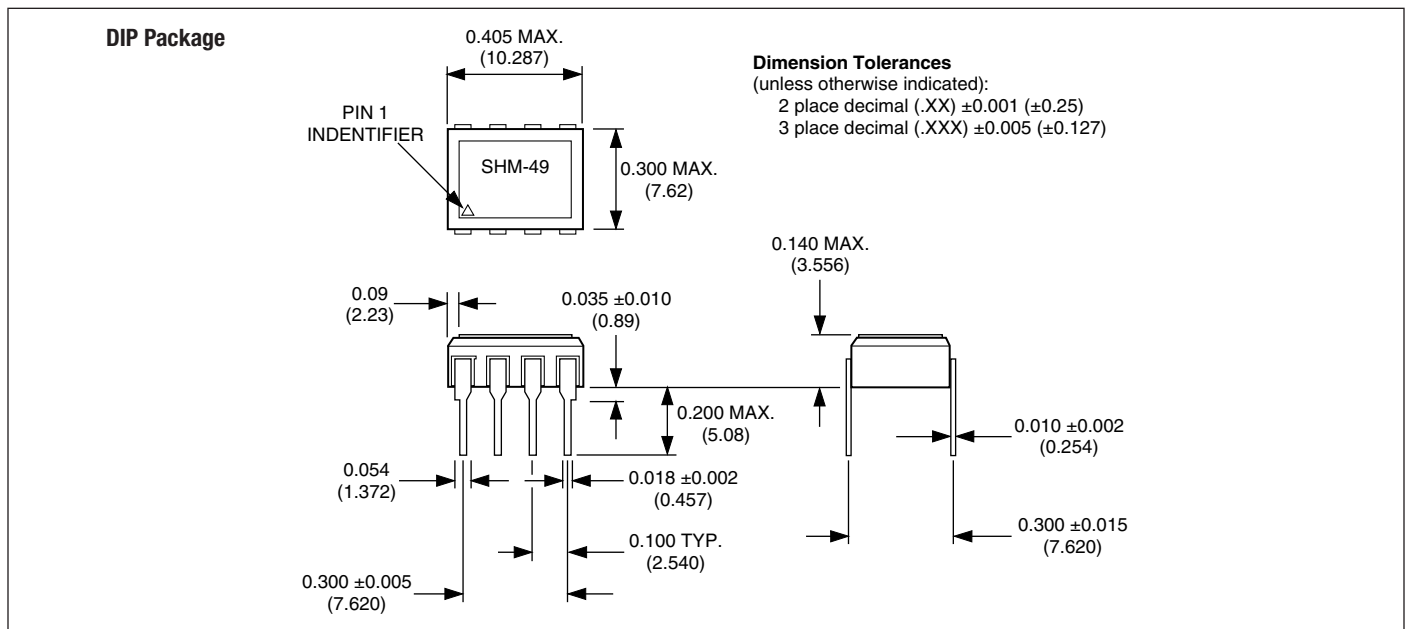

**ISO 9001**  
REGISTERED

Murata Power Solutions, Inc.  
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356  
[www.murata-ps.com](http://www.murata-ps.com) email: [sales@murata-ps.com](mailto:sales@murata-ps.com)  
ISO 9001 REGISTERED

3/13/08

- USA:** Tucson (AZ), Tel: (800) 547 2537, email: [sales@murata-ps.com](mailto:sales@murata-ps.com)
- Canada:** Toronto, Tel: (866) 740 1232, email: [toronto@murata-ps.com](mailto:toronto@murata-ps.com)
- UK:** Milton Keynes, Tel: +44 (0)1908 615232, email: [mk@murata-ps.com](mailto:mk@murata-ps.com)
- France:** Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: [france@murata-ps.com](mailto:france@murata-ps.com)
- Germany:** München, Tel: +49 (0)89-544334-0, email: [ped.munich@murata-ps.com](mailto:ped.munich@murata-ps.com)
- Japan:** Tokyo, Tel: 3-3779-1031, email: [sales\\_tokyo@murata-ps.com](mailto:sales_tokyo@murata-ps.com)  
Osaka, Tel: 6-6354-2025, email: [sales\\_osaka@murata-ps.com](mailto:sales_osaka@murata-ps.com)  
**Website:** [www.murata-ps.jp](http://www.murata-ps.jp)
- China:** Shanghai, Tel: +86 215 027 3678, email: [shanghai@murata-ps.com](mailto:shanghai@murata-ps.com)  
Guangzhou, Tel: +86 208 221 8066, email: [guangzhou@murata-ps.com](mailto:guangzhou@murata-ps.com)