

TLA-18-6007

Low Noise Amplifier


6 GHz - 18 GHz

This Low Noise Amplifier offers low Noise figure performance of 3.8 dB over the band 6 GHz to 18 GHz with 36 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

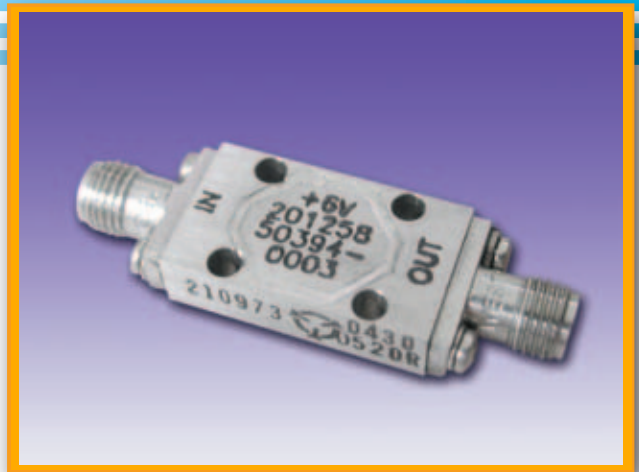

Specifications:

Model Number: TLA-18-6007
Frequency Range: 6 GHz – 18 GHz
Gain (min): 36 dB
Gain Vs Temp at any Frequency: This Amplifier is not Temperature Compensated
Noise Figure (max): 3.8 dB
Output Power @ 1dB Compression: 18 dBm
Gain Flatness Vs Frequency: +/-2.0 dB
3rd Order Intercept (Typ): 23 dBm
Power Supply:
 Input Voltage: 11.5 to 15 VDC
 Current @ 12 VDC (typ): 490 mA
 Current @ 12 VDC (max): 560 mA
Case Type (See attached Outline): SX8
Temperature Range: +25




ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845
www.teledynemicrowave.com • microwave@teledyne.com

TLA-18-6007

Low Noise Amplifier

6 GHz - 18 GHz

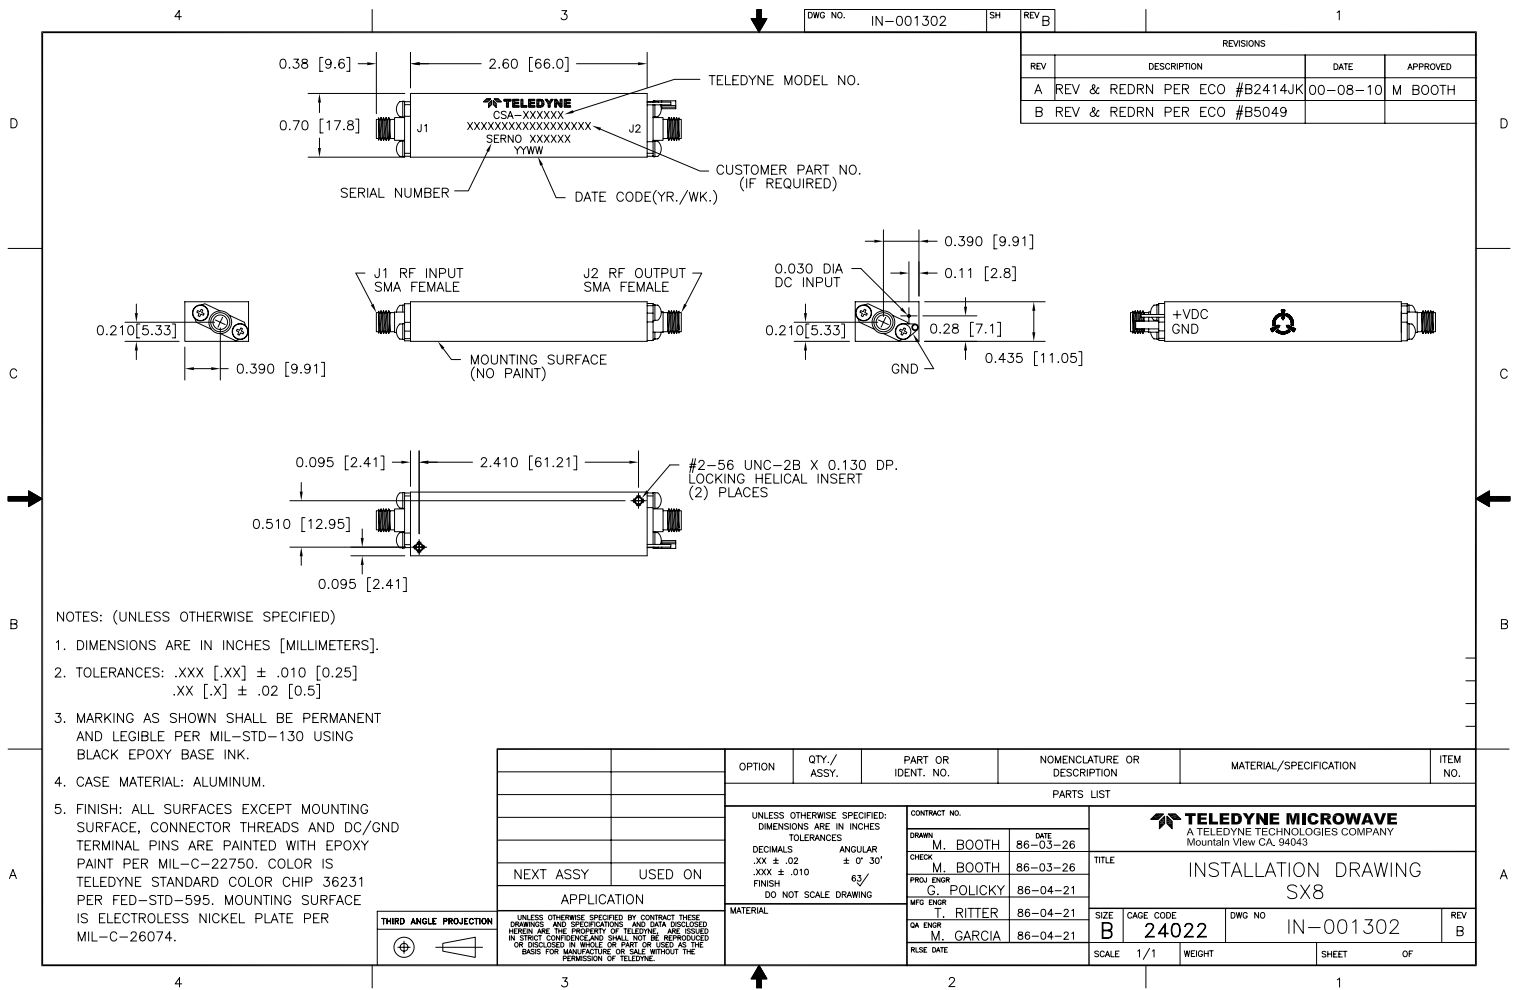

ISO 9001:2000

1274 Terra Bella Avenue, Mountain View, CA 94043 • PHN# 800.832.6869 or +1.650.962.6944 • FAX# 650.962.6845
www.teledynemicrowave.com • microwave@teledyne.com

All Specifications are subject to change. Please contact Teledyne Microwave for the latest information on this product

08/05