


## Current Transducer LA 25-NP/SP14

$$I_{PN} = 0.25 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



### Electrical data

$I_{PN}$	Primary nominal r.m.s. current	0.25	A
$I_P$	Primary current, measuring range	0 .. ± 0.36	A
$R_M$	Measuring resistance with ± 15 V	$R_{M \min}$	$R_{M \max}$
		@ ± 0.25 A <sub>max</sub>	100    320    Ω
		@ ± 0.36 A <sub>max</sub>	100    190    Ω
$I_{SN}$	Secondary nominal r.m.s. current	25	mA
$K_N$	Conversion ratio	100 : 1000	
$V_C$	Supply voltage (± 5 %)	± 15	V
$I_C$	Current consumption	10 + $I_S$	mA
$V_d$	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	2.5	kV
$V_b$	R.m.s. rated voltage <sup>1)</sup> , safe separation basic isolation	600	V
		1700	V

### Accuracy - Dynamic performance data

$X$	Typical accuracy @ $I_{PN}$ , $T_A = 25^\circ\text{C}$	± 0.5	%
$e_L$	Linearity	< 0.2	%
$I_O$	Offset current <sup>2)</sup> @ $I_P = 0$ , $T_A = 25^\circ\text{C}$	Typ ± 0.05	Max ± 0.15 mA
$I_{OM}$	Residual current <sup>3)</sup> @ $I_P = 0$ , after an overload of 3 x $I_{PN}$	± 0.05	± 0.15 mA
$I_{OT}$	Thermal drift of $I_O$ - 10°C .. + 70°C	± 0.10	± 0.35 mA
$t_r$	Response time <sup>4)</sup> @ 90 % of $I_{P \max}$	< 1	µs
$f$	Frequency bandwidth (- 1 dB)	DC .. 150	kHz

### General data

$T_A$	Ambient operating temperature	- 10 .. + 70	°C
$T_S$	Ambient storage temperature	- 25 .. + 85	°C
$R_P$	Primary coil resistance @ $T_A = 25^\circ\text{C}$	< 745	mΩ
$R_S$	Secondary coil resistance @ $T_A = 70^\circ\text{C}$	110	Ω
$L_P$	Primary insertion inductance	496	µH
$R_{IS}$	Isolation resistance @ 500 V, $T_A = 25^\circ\text{C}$	> 1500	MΩ
$m$	Mass	22	g
	Standards <sup>5)</sup>	EN 50178	

Notes : <sup>1)</sup> Pollution class 2

<sup>2)</sup> Measurement carried out after 15 mn functioning

<sup>3)</sup> The result of the coercive field of the magnetic circuit

<sup>4)</sup> With a di/dt of 100 A/µs

<sup>5)</sup> A list of corresponding tests is available

### Features

- Closed loop (compensated) multi-turns current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0.

### Special features

- $I_{PN} = 0.25 \text{ A}$
- $I_P = 0 \dots \pm 0.36 \text{ A}$
- $K_N = 100 : 1000$
- $T_A = - 10^\circ\text{C} \dots + 70^\circ\text{C}$ .

### Advantages


- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

### Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

990126/2

## Dimensions LA 25-NP/SP14 (in mm. 1 mm = 0.0394 inch)

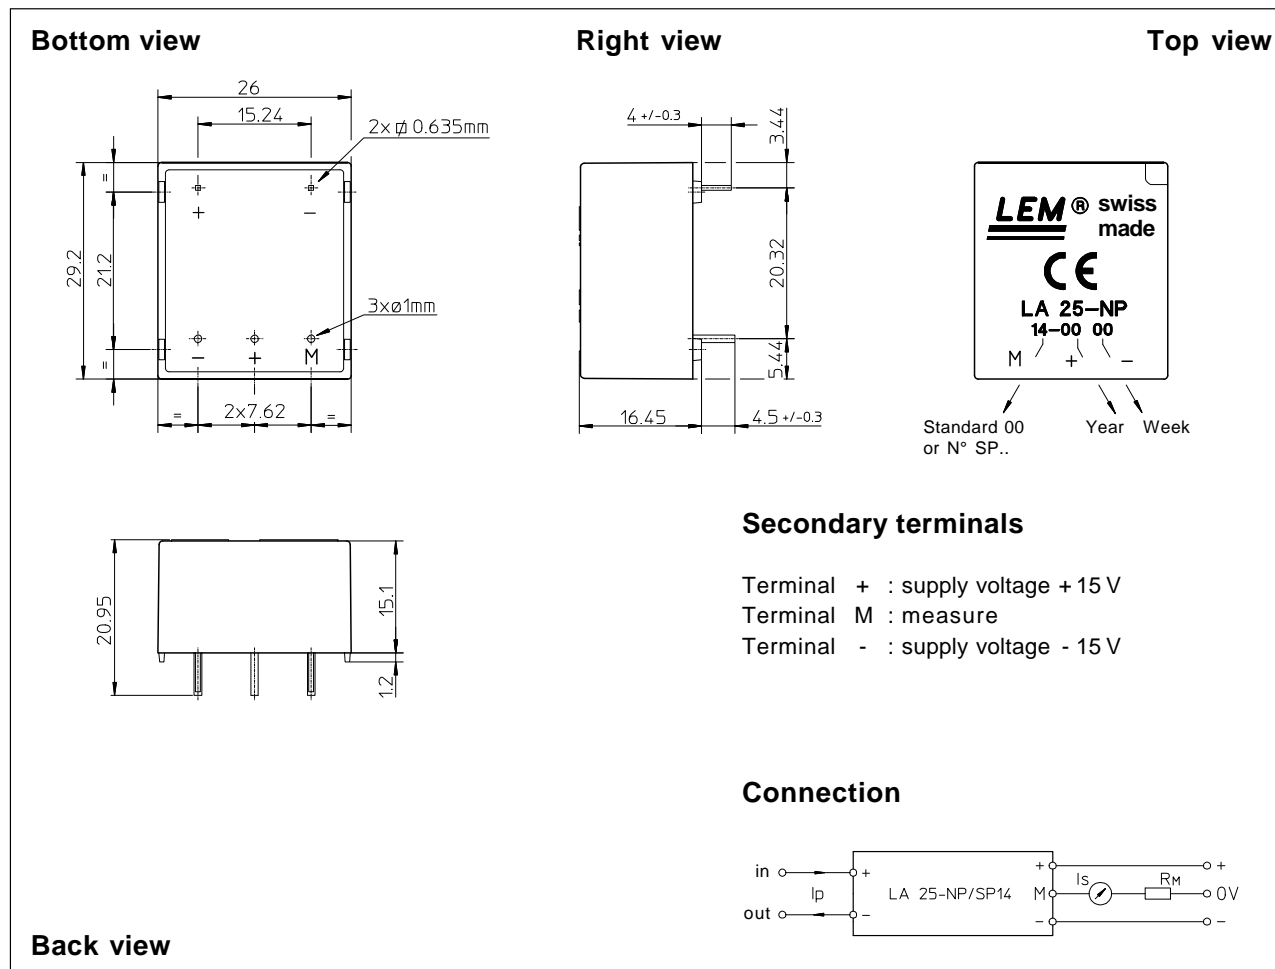

### Mechanical characteristics

- General tolerance  $\pm 0.2$  mm
- Fastening & connection of primary 2 pins  
0.635 x 0.635 mm
- Fastening & connection of secondary 3 pins  $\phi$  1 mm
- Recommended PCB hole 1.2 mm

### Remark

- I<sub>s</sub> is positive when I<sub>p</sub> flows from terminal + to terminal -.