



Siemens Matsushita Components

SAW Components
Low Loss Filter for Mobile Communication


B4114
862,00 MHz

Data Sheet

Features

- Low-loss RF cleanup filter for mobile telephone PCS systems, transmit path
- Usable passband 30 MHz
- High nearby selectivity
- Ceramic package for **Surface Mounted Technology (SMT)**

Ceramic package **DCC6C**

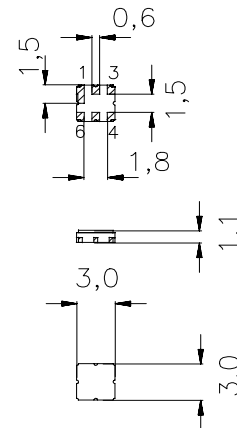


Dimensions in mm, approx. weight 0,05 g

Terminals

- Ni, gold-plated

Pin configuration

- 2 Input
- 3 Input - ground
- 5 Output
- 4 Output - ground
- 1,6 To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4114	B39861-B4114-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	°C	source impedance 50 Ω
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	3	dBm	

Preliminary format of data sheet.
 Terms of delivery and rights to change design reserved.
 Page 1 of 8

OFW SIN E
 Jun 10, 1999



Siemens Matsushita Components

SAW Components
Low Loss Filter for Mobile Communication

B4114
862,00 MHz

Data Sheet

Characteristics

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	862,0	—	MHz
Maximum insertion attenuation	α_{\max}				
847,0 ... 877,0 MHz		—	2,8	3,4	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
847,0 ... 877,0 MHz		—	1,1	1,7	dB
Input VSWR					
847,0 ... 877,0 MHz		—	2,4	2,6	
Output VSWR					
847,0 ... 877,0 MHz		—	2,4	2,6	
Relative attenuation (relative to α_{\max})	α_{rel}				
0,0 ... 820,0 MHz		32,0	37,0	—	dB
820,0 ... 838,0 MHz		16,0	19,0	—	dB
905,0 ... 2200,0 MHz		23,0	26,0	—	dB



SAW Components
Low Loss Filter for Mobile Communication

B4114
862,00 MHz

Data Sheet

Characteristics of 2 filters in cascade ¹⁾

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	862,0	—	MHz
Maximum insertion attenuation	α_{\max}				
847,0 ... 877,0 MHz		—	5,5	7,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
847,0 ... 877,0 MHz		—	2,1	3,6	dB
847,0 ... 877,0 MHz 2)		—	2,1	3,0	dB
Input VSWR					
847,0 ... 877,0 MHz		—	2,8	3,5	
Output VSWR					
847,0 ... 877,0 MHz		—	2,8	3,5	
Relative attenuation (relative to α_{\max})	α_{rel}				
0,0 ... 820,0 MHz		60,0	75,0	—	dB
820,0 ... 838,0 MHz		31,0	34,0	—	dB
905,0 ... 2200,0 MHz		35,0	40,0	—	dB

1) Cascaded filters matched to each other with parallel coupling coil of 10 nH.

2) In temperature range -20 to $+85^{\circ}\text{C}$.



SAW Components
Low Loss Filter for Mobile Communication

B4114
862,00 MHz

Data Sheet

Characteristics of 2 filters in cascade ¹⁾

Operating temperature range: $T = -30$ to $+85^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_c	—	862,0	—	MHz
Maximum insertion attenuation	α_{\max}				
847,0 ... 877,0 MHz		—	5,5	7,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
847,0 ... 877,0 MHz		—	2,1	3,6	dB
847,0 ... 877,0 MHz 2)		—	2,1	3,0	dB
Input VSWR					
847,0 ... 877,0 MHz		—	3,9	4,4	
Output VSWR					
847,0 ... 877,0 MHz		—	3,9	4,4	
Relative attenuation (relative to α_{\max})	α_{rel}				
0,0 ... 820,0 MHz		60,0	75,0	—	dB
820,0 ... 838,0 MHz		31,0	34,0	—	dB
905,0 ... 2200,0 MHz		35,0	40,0	—	dB

1) Cascaded filters directly connected to each other without matching network.

2) In temperature range -20 to $+85^{\circ}\text{C}$.




SAW Components
Low Loss Filter for Mobile Communication


B4114
862,00 MHz

Data Sheet

Measured transfer function(2 filters B4114 in cascade with 10nH parallel coupling coil):

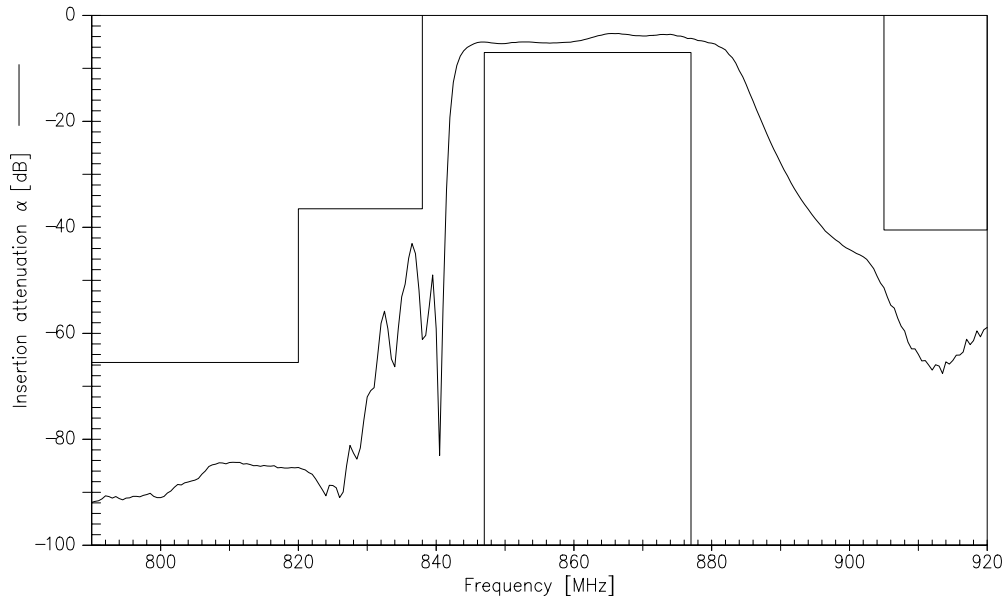

Measured transfer function(wideband,2 filters B4114 in cascade with 10nH parallel coupling coil):

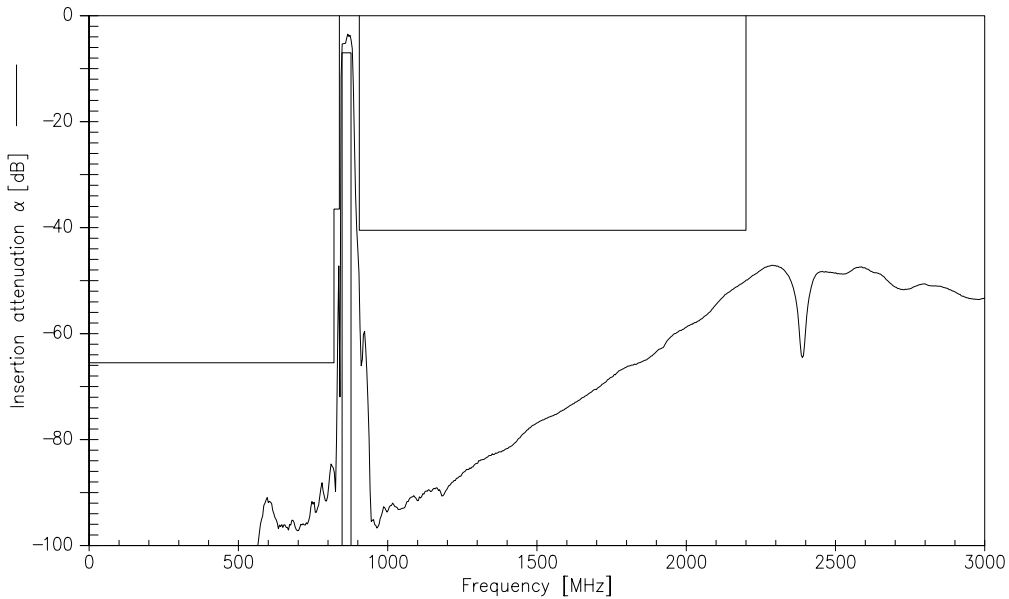




Siemens Matsushita Components

SAW Components Low Loss Filter for Mobile Communication


B4114
862,00 MHz

Data Sheet

Measured transfer function(2 filters B4114 in cascade without parallel coupling coil):

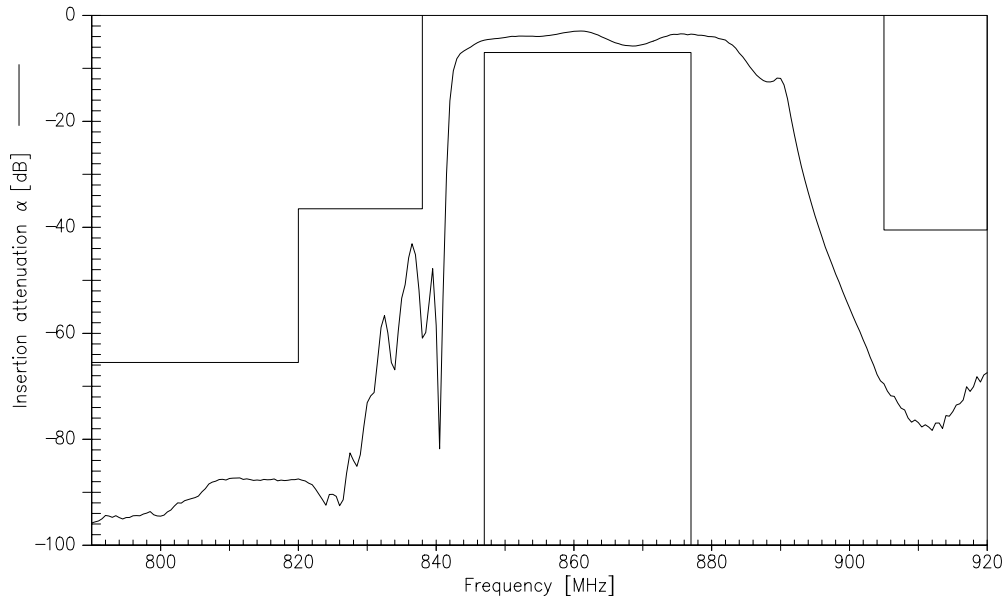

Measured transfer function(wideband, 2 filters B4114 in cascade without parallel coupling coil):

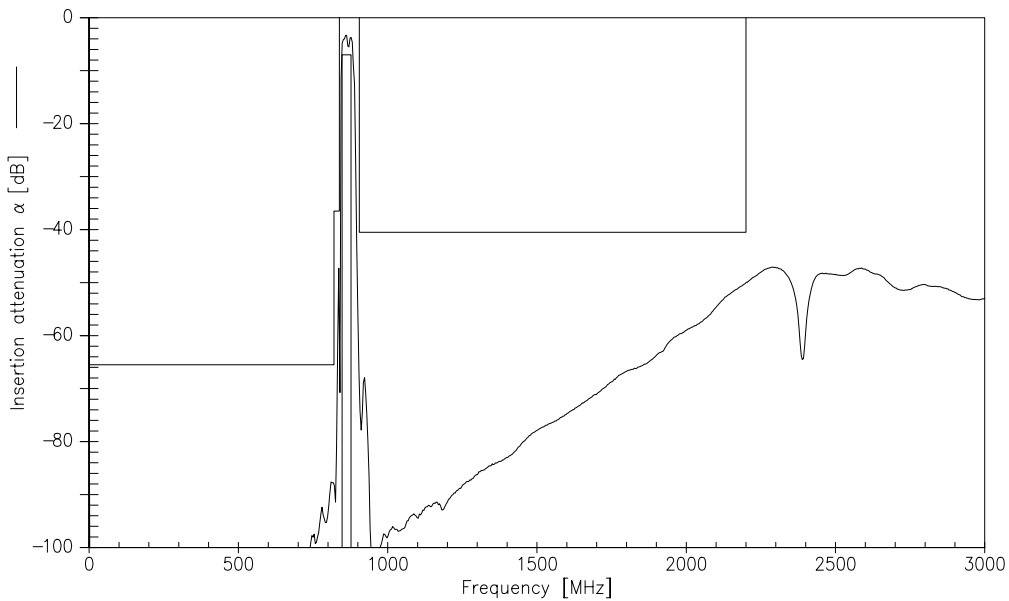

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 6 of 8

OFW SIN E
Jun 10, 1999





Siemens Matsushita Components

SAW Components
Low Loss Filter for Mobile Communication

B4114
862,00 MHz

Data Sheet

Reflection functions(2 filters B4114 in cascade with 10nH parallel coupling coil):

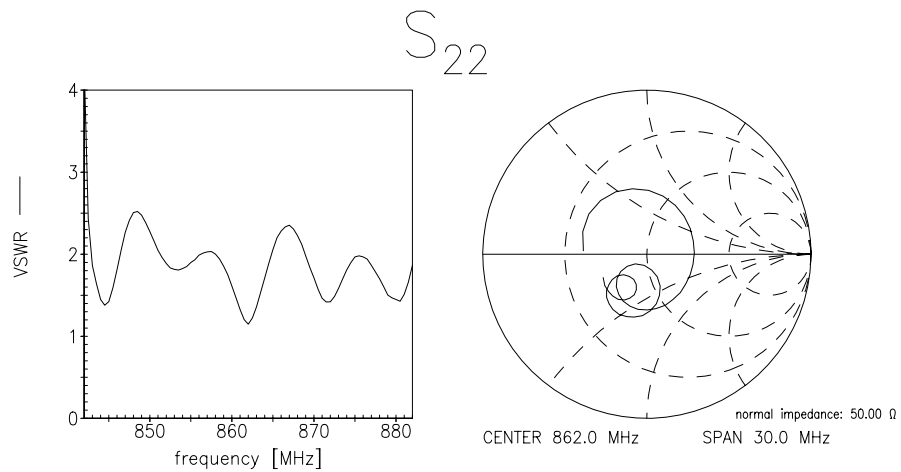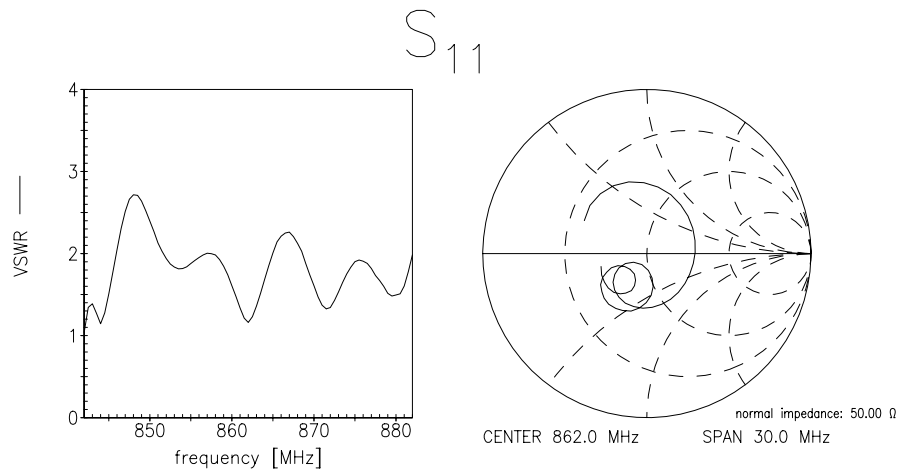

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 7 of 8

OFW SIN E
Jun 10, 1999





Siemens Matsushita Components

SAW Components Low Loss Filter for Mobile Communication

**B4114
862,00 MHz**

Data Sheet

Reflection functions(2 filters B4114 in cascade without parallel coupling coil):

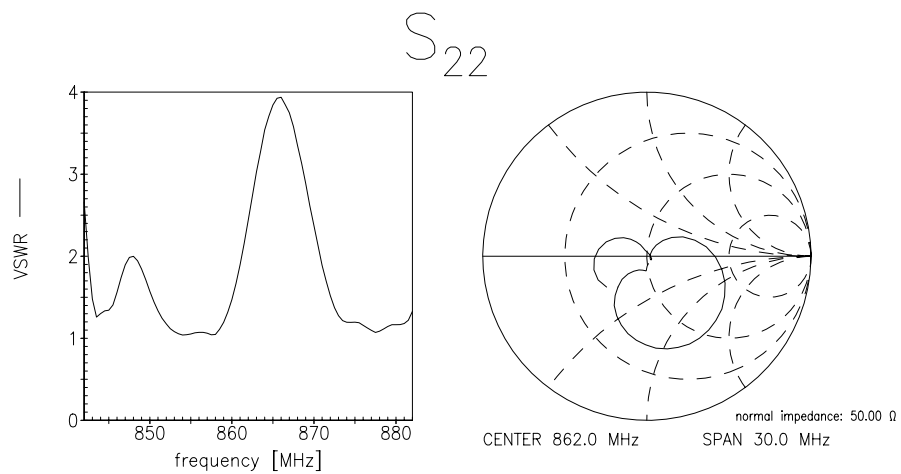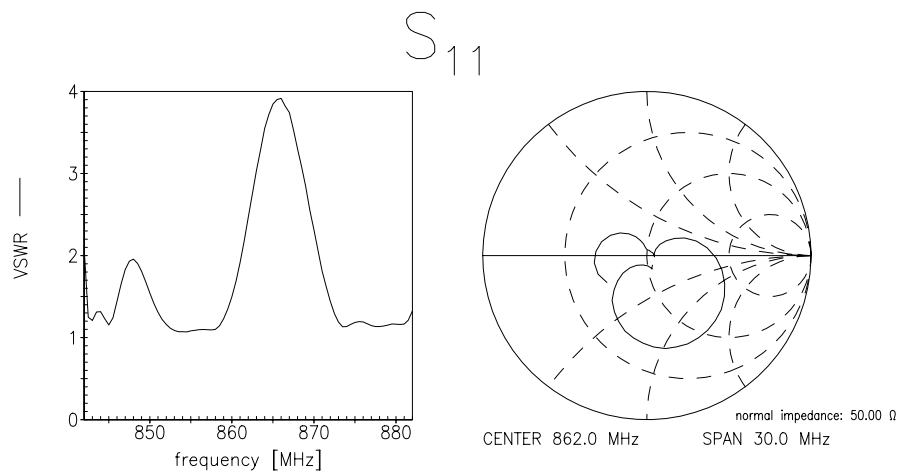

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 8 of 8

OFW SIN E
Jun 10, 1999