


**DESCRIPTION**

The IP1522 is a dual output voltage series regulator which can provide up to 500mA of output current. The IP1522 consists of 1fixed 3.3V and 1fixed 1.65V regulators.

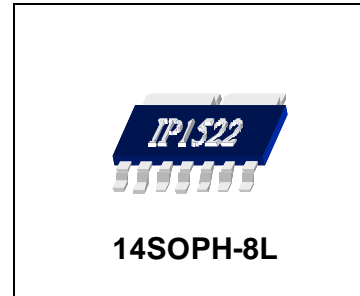


**FEATURES**

- 1-Fixed 3.3V Regulator with Internal NPN TR.
- 1-Fixed 1.65V Regulator with Internal NPN TR.
- Built-in TSD Circuit.
- Built-in Current Limit Circuit.
- Built-in ON/OFF Control Circuit.
- Built-in Over Voltage Protection Circuit.
- Output trimmed to +/-3% Tolerance


**ORDERING INFORMATION**

Device	Package	Operating Temp
IP1522	14SOPH-8L	-35°C ~ +85°C

**BLOCK DIAGRAM**

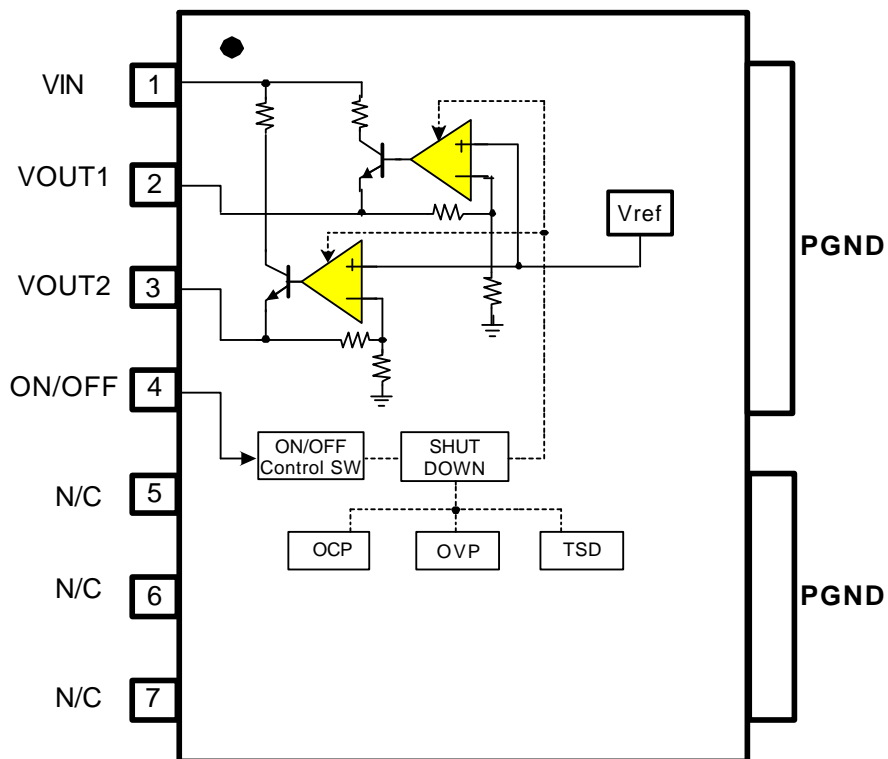

**PIN CONNECTIONS**

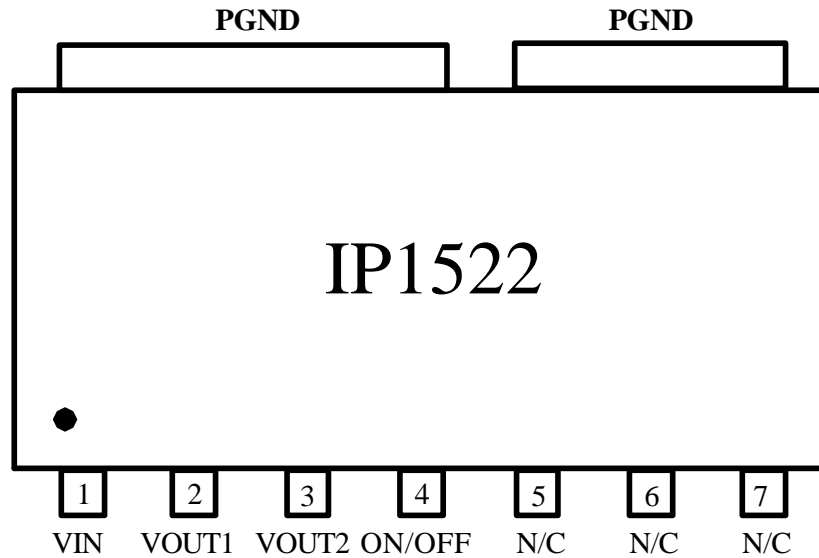

**PIN DESCRIPTIONS**

NO	SYMBOL	I/O	DESCRIPTION
1	VIN	I	Input Supply Voltage
2	VOUT1	O	Reg +3.3V Output
3	VOUT2	O	Reg +1.65V Output
4	ON/OFF	I	ON/OFF Control
5	N/C	-	No Connection
6	N/C	-	No Connection
7	N/C	-	No Connection
8	PGND	-	Power Ground


**ABSOLUTE MAXIMUM RATINGS(TA=25°C)**

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Maximum supply voltage	Vinmax	10	V
ON/OFF voltage	Vonoff	10	V
Power dissipation	Pd	3.5*	W
Operating temperature	Topr	-35 ~ +85	°C
Storage temperature	Tstr	-55 ~ +150	°C

Note>

1. When mounted on 100mm X 100mm X 1mm PCB (Phenolic resin material).
2. Power dissipation reduces 28mW/°C for using above Ta=25°C
3. Do not exceed Pd and SOA.

**POWER DISSIPATION CURVE**

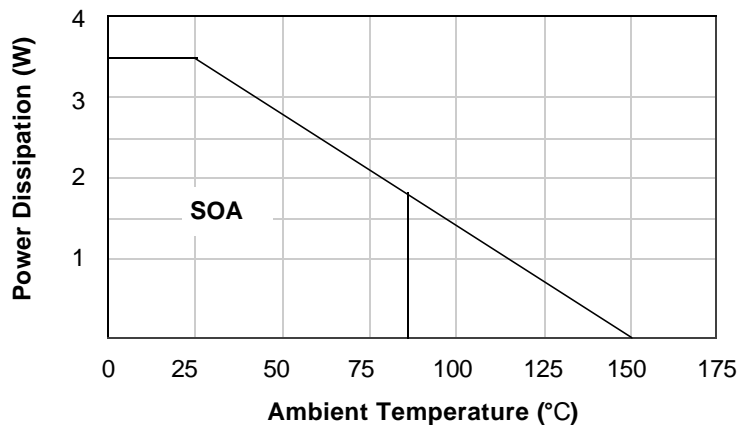

**RECOMMENDED OPERATING CONDITIONS**

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Supply voltage	Vcc	4.5 ~ 6.0	V
Input voltage	Vin	4.5 ~ 6.0	V

**ELECTRICAL CHARACTERISTICS**

( $V_{in}=5.25V$ ,  $C_o=10\mu F$ ,  $T_a=25^{\circ}C$ , unless otherwise specified.)

Characteristics	Symbol	Condition	Min.	Typ.	Max.	Units
Quiescent current	I <sub>cc</sub>	V <sub>cc</sub> =5.25V, No-Load	-	7	11	mA
OVP Detecting Voltage	V <sub>ovp</sub>	V <sub>cc</sub> =Variable	6.5	-	-	V
<b>3.3V REGULATOR PART</b>						
Output Voltage	V <sub>out1</sub>	I <sub>o</sub> =10mA	3.2	3.3	3.4	V
Line Regulation	dV <sub>line1</sub>	V <sub>in</sub> =4.5~6V, I <sub>o</sub> =10mA	-	0.035	0.2	%
Load Regulation	dV <sub>load 1</sub>	V <sub>in</sub> =5.25V, 10mA < I <sub>o</sub> < 500mA	-	0.4	0.8	%
Dropout voltage	V <sub>drop1</sub>	I <sub>o</sub> =500mA	-	1.1	1.3	V
Ripple rejection	RR1	F=120Hz, C <sub>o</sub> =10 $\mu$ F Tantalum (V <sub>in</sub> -V <sub>out</sub> )=3V, I <sub>o</sub> =200mA	60	70	-	dB
Current limit <sup>*Note</sup>	I <sub>limit1</sub>	V <sub>in</sub> -V <sub>out</sub> =2.5V	550	750	-	mA
Temperature stability	Temp1	-	-	0.5	-	%
Output noise voltage 1	V <sub>n1</sub>	I <sub>o</sub> =300mA	-	100	-	$\mu$ V
<b>1.65V REGULATOR PART</b>						
Output Voltage	V <sub>out2</sub>	I <sub>o</sub> =10mA	1.6	1.65	1.7	V
Line Regulation	dV <sub>line2</sub>	V <sub>in</sub> =4.5~6V, I <sub>o</sub> =10mA	-	0.035	0.2	%
Load Regulation	dV <sub>load2</sub>	V <sub>in</sub> =5.25V, 10mA < I <sub>o</sub> < 100mA	-	0.4	0.8	%
Dropout voltage	V <sub>drop2</sub>	I <sub>o</sub> =100mA	-	2.5	2.8	V
Ripple rejection	RR2	F=120Hz, C <sub>o</sub> =10 $\mu$ F Tantalum (V <sub>in</sub> -V <sub>out</sub> )=3V, I <sub>o</sub> =50mA	60	70	-	dB
Current limit <sup>*Note</sup>	I <sub>limit2</sub>	V <sub>in</sub> -V <sub>out</sub> =4V	120	-	-	mA
Temperature stability	Temp2	-	-	0.5	-	%
Output noise voltage 2	V <sub>n2</sub>	I <sub>o</sub> =60mA	-	100	-	$\mu$ V

**ELECTRICAL CHARACTERISTICS (Continued)**

( $V_{in} = 5.25V$ ,  $C_o = 10\mu F$ ,  $T_a = 25^\circ C$ , unless otherwise specified.)

<b>ON/OFF CONTROL PART</b>						
On voltage	$V_{on}$	$V_{out} = \text{Enabled}$	-	-	0.8	V
Off voltage	$V_{off}$	$V_{out} = \text{Disabled}$	2.0	-	-	V


\* Note

Don't exceed following current limit.  
( $I_{out1} : 550 \text{ mA}$ ,  $I_{out2} : 120 \text{ mA}$ )

**APPLICATION SUMMARY**

**- ON / OFF**

When you want to control output of the IP1522, use pin #4 as follows

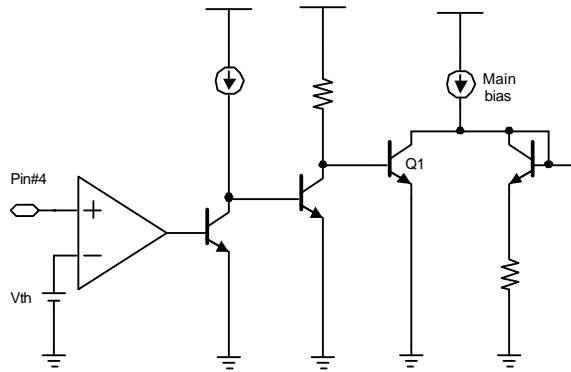


on/off function



Pin#4	IP1522
HIGH	off
LOW	on

As shown in figure Pin#4 is positive input of the comparator, and the other Input is threshold voltage. If the voltage of the pin#4 rises above threshold voltage, then TR Q1 will be saturated and the main bias current will be shut down.

**TYPICAL APPLICATION CIRCUIT**

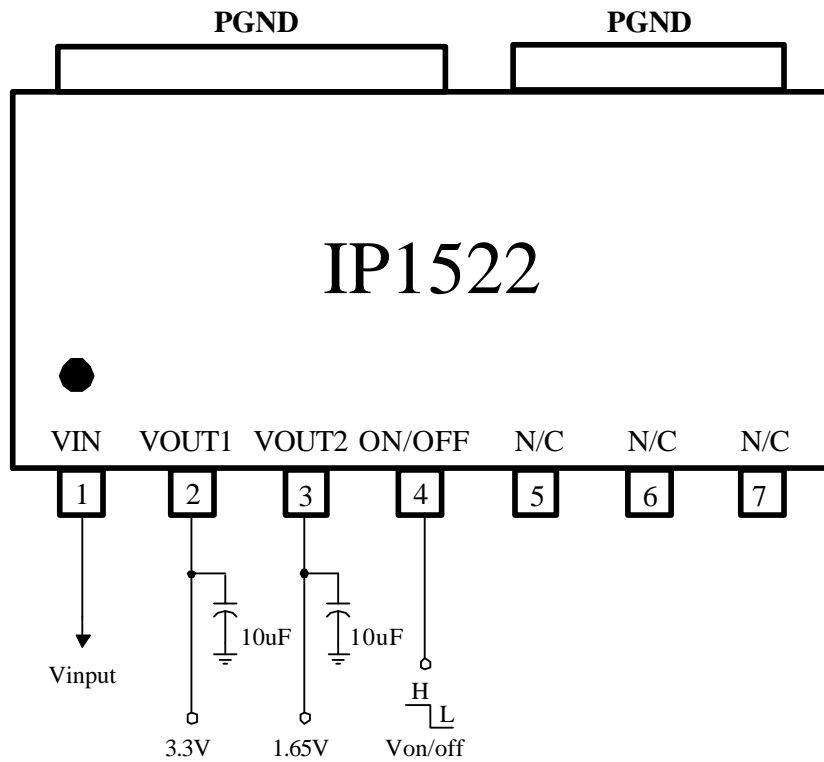


**INTERNAL CIRCUIT**

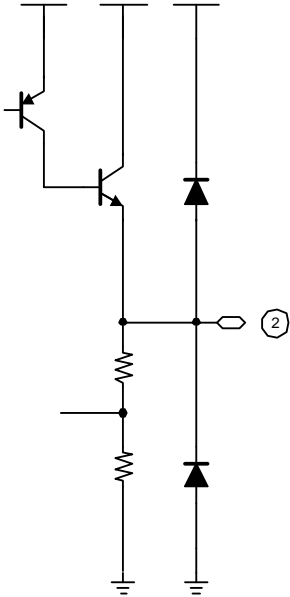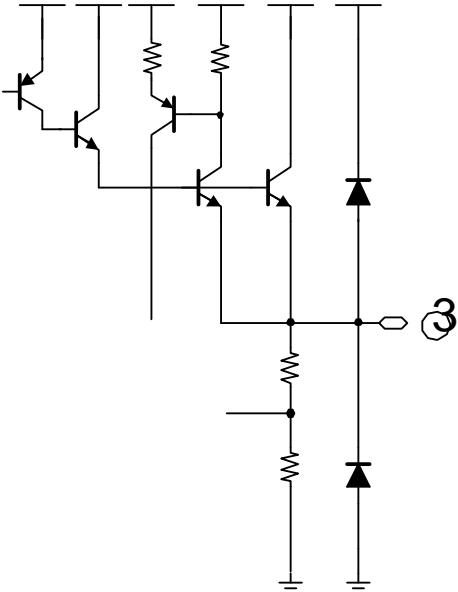Pin no	Pin name	Internal circuit
2	Regulator output1	
3	Regulator Output2	




**INTERNAL CIRCUIT (Continued)**

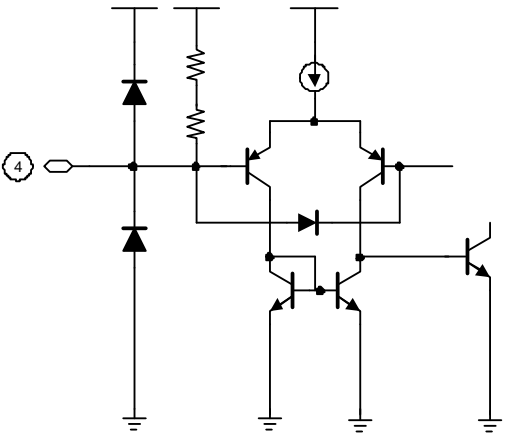
Pin no	Pin name	Internal circuit
4	ON / OFF	

ELECTRICAL CHARACTERISTICS CURVES


VCC vs ICC

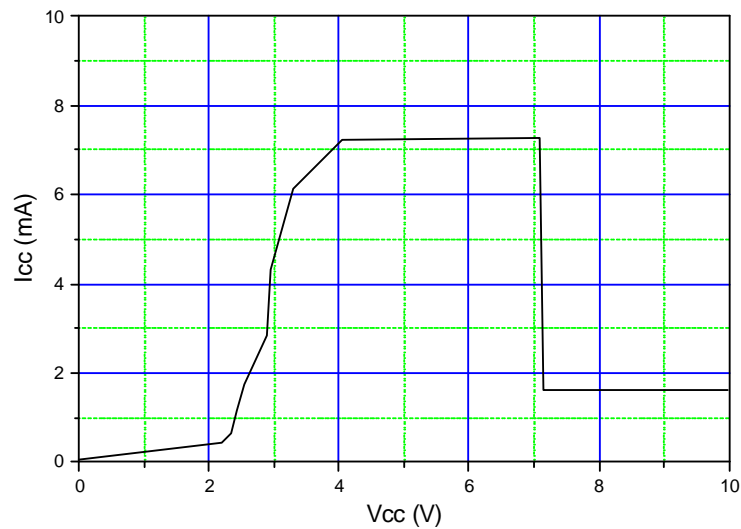


VREF TEMPERATURE STABILITY

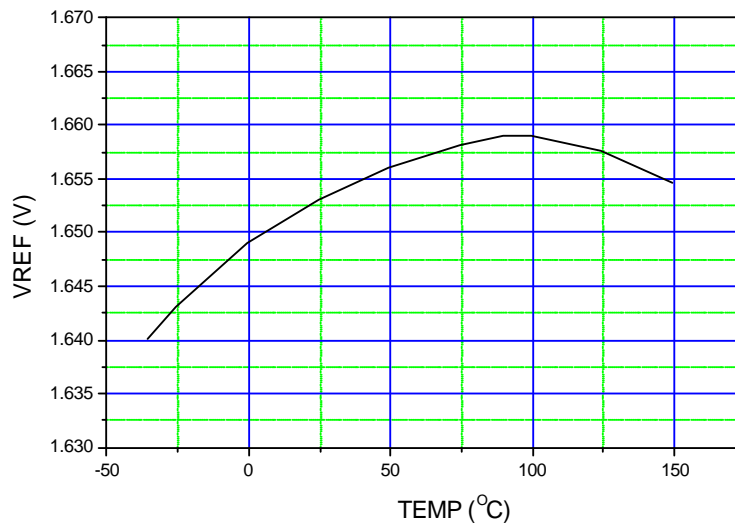

I<sub>Load1</sub> vs V<sub>drop1</sub>

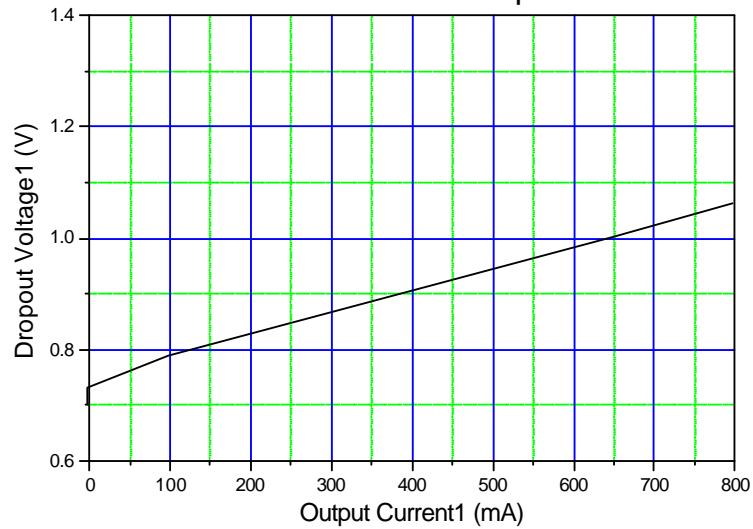


I<sub>Load2</sub> vs V<sub>drop2</sub>

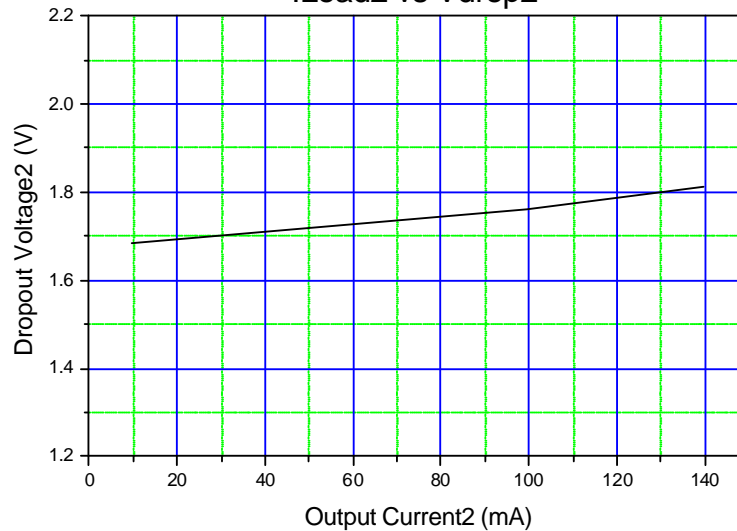


ELECTRICAL CHARACTERISTICS CURVES (Continued)

VOUT1 Load Regulation ( $T_j=25^\circ\text{C}$ )

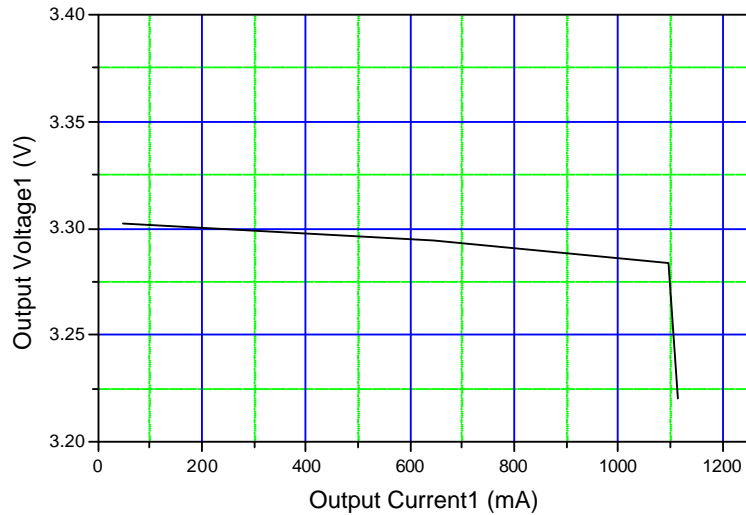


VOUT2 Load Regulation ( $T_j=25^\circ\text{C}$ )

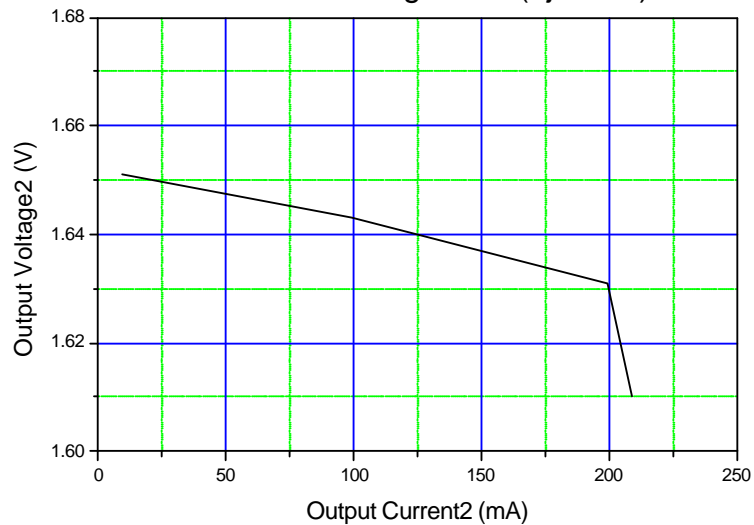


**ELECTRICAL CHARACTERISTICS CURVES (Continued)**

**VOUT1 Load Transient Response**

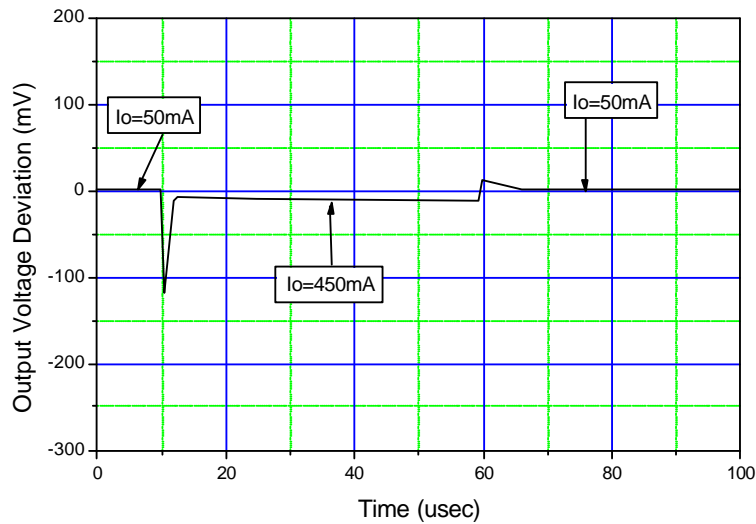

**VOUT2 Load Transient Response**

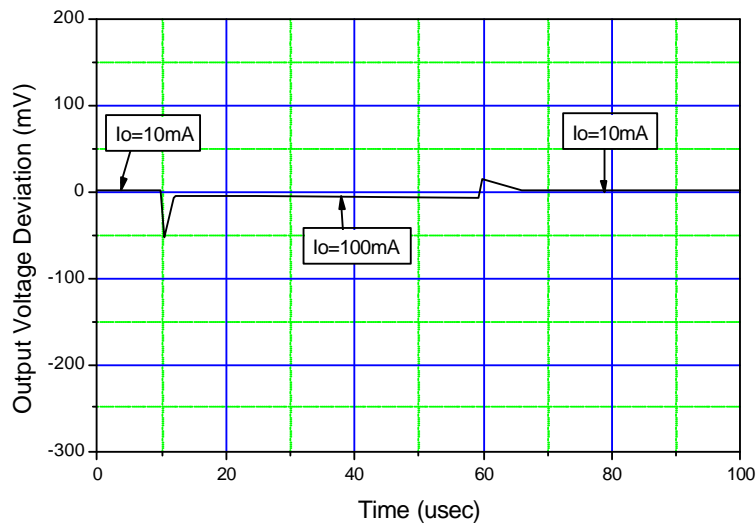

**PACKAGE DIMENSION**

**14SOPH-8L**

