

Product Description

The PE42750 is an SPDT UltraCMOS[™] Switch designed for Broadband applications such as CATV, DTV, Multi-Tuner Digital Video Recorder (DVR), Set-top Box, PCTV and Video Game Consoles. The PE42750 meets FCC 15.115 specification of 80 dB isolation at 216 MHz in both powered and unpowered states. The PE42750 covers a broad frequency range from 5 MHz to 2200 MHz with a single positive supply and CMOS control. The PE42750 provides a smaller, cost effective, more reliable and manufacturable alternative to mechanical relays in set-top box applications.

The PE42750 is manufactured using Peregrine's UltraCMOS[™] process, a patented variation of silicon-oninsulator (SOI) technology on a sapphire substrate, offering the performance of GaAs with the economy and integration of conventional CMOS.

Product Specification PE42750

75 Ω Terminated 5 - 2200 MHz SPDT CATV UltraCMOS™ Switch Featuring Unpowered Operation

Features

- Meets FCC 15.115 isolation specification
- All ports terminated when unpowered
- 2000 V HBM ESD tolerance, all ports
- High isolation: 63 dB at 1000 MHz
- Low insertion loss, typical:
 - 0.7 dB at 5 MHz
 - 1.0 dB at 1000 MHz
- CMOS single-pin control with logic select
- Single +3 volt supply operation
- Low current consumption: 8 µA
- Absorptive Switch Design

Figure 1. Functional Diagram

Peregrine Specification 71-0013

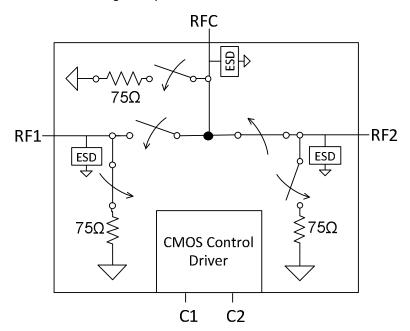


Figure 2. Package Type 3x3x0.75 mm 12-lead QFN





Table 1. Electrical Specifications @ +25 °C, V_{DD} = +3 V (Z_S = Z_L = 75 Ω)

Parameter	Condition	Minimum	Typical	Maximum	Units
Operating Frequency		5		2200	MHz
	5 to 220 MHz		0.7	0.8	
	221 to 550 MHz		0.8	0.9	
Insertion Loss - RFX to RFC	551 to 810 MHz		0.9	1.0	dB
	811 to 870 MHz		0.9	1.0	
	871 to 2200 MHz		1.7	1.8	
	5 to 220 MHz	80	84		
	221 to 550 MHz	70	76		
Isolation - RFX to RFX ³	551 to 810 MHz	65	72		dB
	811 to 870 MHz	65	71		
	871 to 2200 MHz	50	0.7 0.8 0.9 0.9 1.7 84 76 72 71 57 80 72 70 70 55 23 20 18 17 100 100 47.5 23.5 2		
	5 to 220 MHz	74	80		
	221 to 550 MHz	67	72		
Isolation - RFX to RFC	551 to 810 MHz	65	70		dB
	811 to 870 MHz	65	70		
	871 to 2200 MHz	51	55		
	5 to 220 MHz				
	221 to 550 MHz				
Return Loss - RFX to RFC	551 to 810 MHz 811 to 870 MHz				dB
	871 to 2200 MHz				
IIP2 RFX ¹	5-2200 MHz		100		dBm
IIP3 RFX ^{1,4}	5-2200 MHz		47.5		dBm
Input 1 dB Compression RFX or RFC ¹	1000 MHz	21.5	23.5		dBm
Switching time ²	50% CTRL to 10/90% RF		2	3	μs
Video Feedthough ²			2		mVpp

Notes:

1. Measured in a 50 Ω system 2. 0/3V on control pin, 1 ns rise time 3. Minimum per FCC 15.115 spec

4. 10 dBm per tone for 1:3 ratio of fundamental to IMD3 products

Table 2. Electrical Characterization (Unpowered Operation)

Parameter	Condition	Minimum	Typical	Maximum	Units
Operating Frequency		5		2200	MHz
	5 to 220 MHz	83	90		
	221 to 550 MHz	77	83		
Isolation RF1 to RF2	551 to 810 MHz	73	79		dB
	811 to 870 MHz	73	79		
	871 to 2200 MHz	65	72		



Figure 3. Pin Configuration (Top View)




Table 3. Pin Descriptions

No.	Name	Description	
1	GND	RF Ground	
2	RF1 ¹	RF I/O	
3	GND	RF Ground	
4	GND	RF Ground	
5	RFC ¹	RF Common	
6	GND	RF Ground	
7	GND	RF Ground	
8	RF2 ¹	RF I/O	
9	GND	RF Ground	
10	C2 ²	Control 2 (or logic select)	
11	C1 ²	Control 1 (or logic select)	
12	V _{DD}	Supply	
Pad	GND	Exposed Ground Paddle	

Notes: 1. RF pins 2, 5, and 8 must be at 0 VDC. The RF pins do not require DC blocking capacitors for proper operation if the 0 V DC requirement is met

- 2. Pins 10 and 11 can be set for single pin control
- 3. GND must be connected to exposed ground paddle to ensure good isolation

Moisture Sensitivity Level

The Moisture Sensitivity Level rating for the PE42750 in the 12-lead 3x3x0.75 mm QFN package is MSL1.

Switching Frequency

The PE42750 has a maximum 25 kHz switching rate.

Latch-Up Avoidance

Unlike conventional CMOS devices, UltraCMOS[™] devices are immune to latch-up.

Document No. 70-0334-02 | www.psemi.com

Table 4. Operating Conditions @ 25 °C

Parameter	Min	Тур	Max	Unit
V _{DD} Power Supply	2.7	3.0	3.3	V
$ I_{\text{DD}} \text{ Power Supply Current} \\ (V_{\text{DD}} = 3 \text{ V}, \ V_{\text{CNTL}} = 3 \text{ V}) $		8		μA
Control Voltage High	$0.7 \times V_{DD}$		V_{DD}	V
Control Voltage Low	0		$0.3 \times V_{\text{DD}}$	V
P _{RF} RF power on RFC, RF1, RF2 Terminated/ Through 75Ω			23/26	dBm
T _{OP} Operating Temperature	-40		+85	ç

Operation should be restricted to the limits in the Operating Ranges table.

Table 5. Absolute Maximum Ratings

Parameter/Condition	Min	Max	Unit
V _I Voltage on CTRL input	-0.3	V _{DD} + 0.3	V
P_{RF} RF power on RFC, RF1, RF2 Terminated/Through 75 Ω		23/26	dBm
T _{ST} Storage temperature	-55	+150	°C
V _{ESD} ESD Voltage, HBM, MIL_STD 883, Method 3015.7		2000	
V _{ESD} MM ESD Voltage all pins JEDEC JESD22-A115-A		150	v
V _{ESD} CDM ESD Voltage JEDEC JESD22-C101D		1000	

Part performance is not guaranteed under these conditions. Exposure to absolute maximum conditions for extended periods of time may adversely affect reliability.

Exceeding absolute maximum ratings may cause permanent damage. Operation between operating range maximum and absolute maximum for extended periods may reduce reliability.

Electrostatic Discharge (ESD) Precautions

When handling this UltraCMOSTM device, observe the same precautions that you would use with other ESD-sensitive devices. Although this device contains circuitry to protect it from damage due to ESD, precautions should be taken to avoid exceeding the rating specified.

Table 6. Truth Table¹

V _{DD}	C1	C2	RFC – RF1	RFC – RF2
OFF ²	Low	Low	OFF	OFF
ON	Low	Low	ON	OFF
ON	Low	High	OFF	ON
ON	High	Low	OFF	ON
ON	High	High	ON	OFF

 Note: 1. A versatile logic table has been established to allow either C1 or C2 to act as a single pin control and in either polarity.
 2. V_{DD} at "OFF" represents an all terminated state.



Performance Plots @ 25 °C and 3.0V unless otherwise specified.

Figure 4. Nominal Insertion Loss (RFX-RFC)

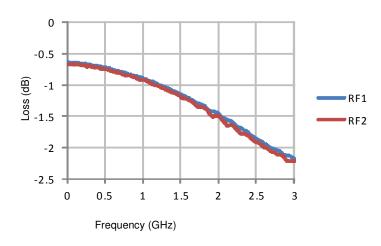


Figure 6. Insertion Loss vs V_{DD} (RFX-RFC)

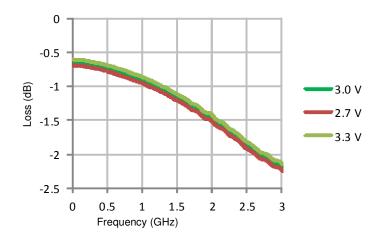




Figure 8. Active Port Return Loss vs V_{DD} (RFX)





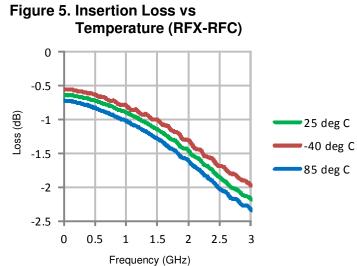
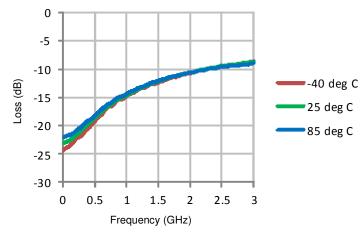
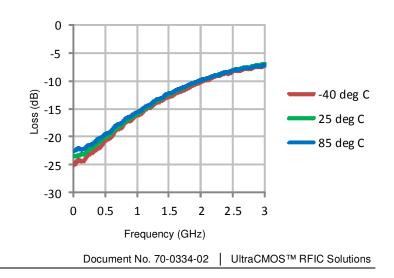


Figure 7. Active Port

Return Loss vs Temperature (RFX)












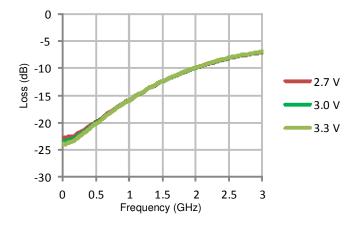


Figure 10. RFC Port Return Loss vs V_{DD}

Figure 12. RF1-RF2 Isolation vs Temperature

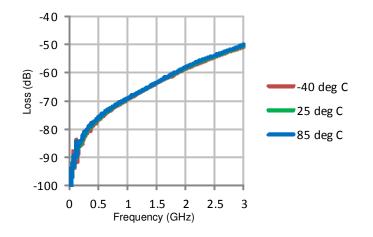




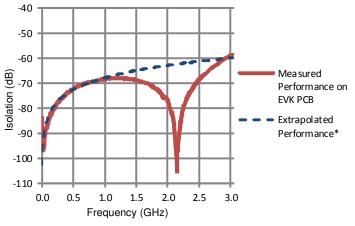

Note: EVK-PCB-related resonance removed from dataset. Extrapolated performance shown represents true performance of part.

Figure 11. RF1-RF2 Isolation vs V_{DD}

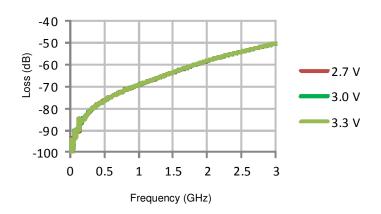




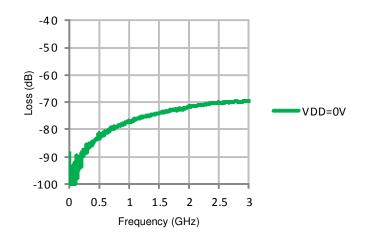


Figure 15. Input IIP3 RFC-RFX



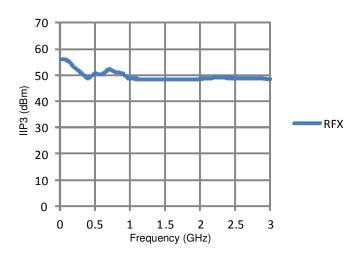

Typical Applications

The PE42750 provides the high isolation required by FCC part 15.115 regulation between the television antenna and the cable plant. The advantage of the PE42750 is that device isolation performance is maintained when power is removed. When the PE42750 is unpowered all ports are terminated.

Figure 16. Typical Application (1 of 3)



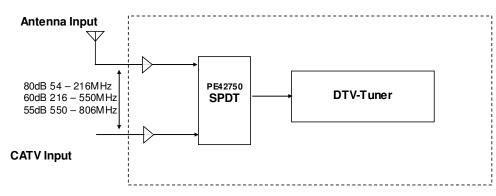


Figure 17. Typical Application (2 of 3)





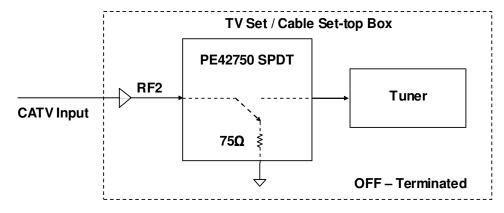

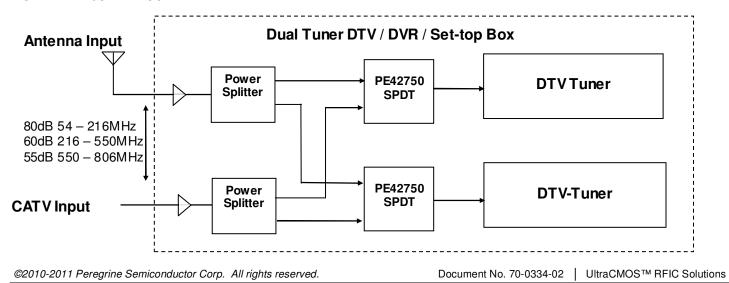

Evaluation Kit Information

The SPDT Switch Evaluation Kit facilitates customer evaluation of the PE42750 SPDT switch. The RF common port is connected through a 75 Ω transmission line to J2. Ports 1 and 2 are connected through 75 Ω transmission lines to J1 and J3. A through line connects F connectors J4 and J5. This transmission line can be used to estimate the PCB loss over the environmental conditions. J6 provides DC and digital inputs to the device.


The board is composed of a two metal layer FR4 material with a total thickness of 0.032". The transmission lines are hybrid microstrip/coplanar waveguide with ground plane (28 mil core, 12 mil width, 12 mil gap).

The provided jumpers short the control pins to ground for logic low. With the jumper removed the control input rises to V_{DD} for logic high through the 1 M Ω pull up resistor. These resistors will draw several microamps from V_{DD} . They are not required for normal operation.

Figure 19. Evaluation Board Schematic

Figure 20. Evaluation Board Layouts

Peregrine Specification 101/0491

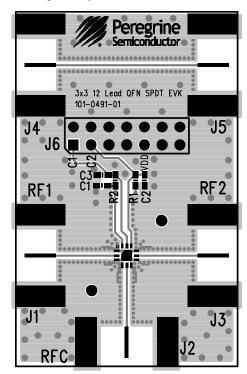

16



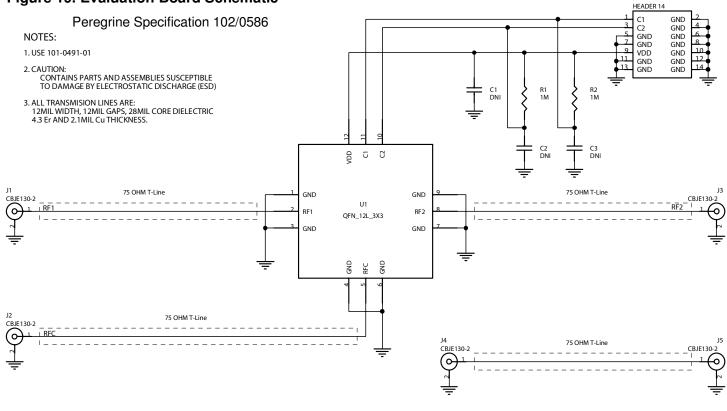




Figure 21. Package Drawing



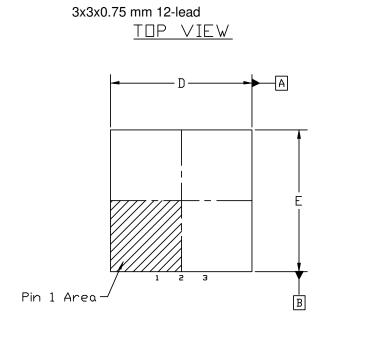



ş	COMMON					
SYMBOL	DIMENSIONS MILLIMETER		DIMENSIONS INCH			
Ľ	MIN.	NDM.	MAX.	MIN.	NDM.	MAX.
A		S	ee vari	ATION "	Α'	
A3		0.203 RE	F	l	0.008 RE	F
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.20	0.25	0.30	0.008	0.010	0.012
D	2.90	3.00	3.10	0.115	0.119	0.123
D2	1.525	1.625	1.725	0.061	0.064	0.068
Е	2.90	3.00	3.10	0.115	0.119	0.123
E2	1.525	1.625	1.725	0.061	0.064	0.068
e	0.50 BSC 0.020 BSC			С		
L	0.35	0.40	0.45	0.014	0.016	0.018

PA	"A"					
40446	DIMENSIONS MILLIMETER		DIMENSIONS INCH		INCH	
Ĕ	MIN.	NDM.	MAX.	MIN.	NDM.	MAX.
TQFN	0.70	0.75	0.80	0.028	0.030	0.032




42750
 YYWW
 ZZZZZ
 = Pin 1 designator
 AAAAA = Five digit part number
 YYWW = Date Code, last two digits of the year and work week
 ZZZZZ = Five digits of the lot number



Figure 23. Tape and Reel Specifications

12-lead 3x3x0.75 mm QFN

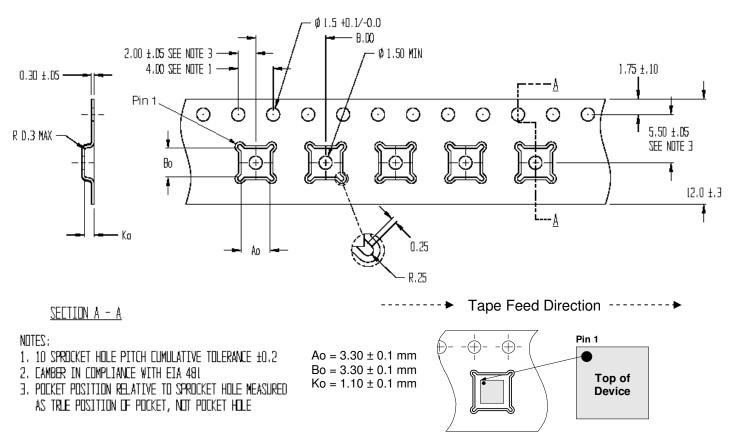

Device Orientation in Tape

Table 7. Ordering Information

Order Code Description		Package	Shipping Method	
PE42750MLAA-Z	PE42750G-12LQFN 3x3mm-3000C	Green 12-lead 3x3mm QFN	3,000 Dice/Reel	
PE42750MLAA PE42750G-12LQFN 3x3mm-cut off tape and reel		Green 12-lead 3x3mm QFN	Bulk or tape cut from reel	
EK42750-01 PE42750-EK		Evaluation Kit	1/box	

Sales Contact and Information

For Sales and contact information please visit www.psemi.com.

Advance Information: The product is in a formative or design stage. The datasheet contains design target specifications for product development. Specifications and features may change in any manner without notice. <u>Preliminary Specification</u>: The datasheet contains preliminary data. Additional data may be added at a later date. Peregrine reserves the right to change specifications at any time without notice in order to supply the best possible product. <u>Product Specification</u>: The datasheet contains final data. In the event Peregrine decides to change the specification Form).

The information in this datasheet is believed to be reliable. However, Peregrine assumes no liability for the use of this information. Use shall be entirely at the user's own risk.

No patent rights or licenses to any circuits described in this datasheet are implied or granted to any third party.

Peregrine's products are not designed or intended for use in devices or systems intended for surgical implant, or in other applications intended to support or sustain life, or in any application in which the failure of the Peregrine product could create a situation in which personal injury or death might occur. Peregrine assumes no liability for damages, including consequential or incidental damages, arising out of the use of its products in such applications.

The Peregrine name, logo, and UTSi are registered trademarks and UltraCMOS, HaRP, MultiSwitch and DuNE are trademarks of Peregrine Semiconductor Corp.

Document No. 70-0334-02 | www.psemi.com