

FDV Series Digital Video/Audio/Data Multi-Channel Systems

Digital Video/Audio/Data Multi-Channel System


The FDV Series Digital Systems are Analog to Digital, Digital to Analog, 8-bit or 10-bit modulated, LED or laser-based Video multiplexers with optional combinations of simplex or duplex 24-bit Audio and various Data signals, all over one multimode or singlemode fiber.

The multi-channel transmission is achieved by digital modulation schemes and Time Division Multiplexing (TDM) techniques. For the Video portion, only a single wavelength is used. This assures the best possible signal uniformity. The FDV Series is ideal for the transmission of multiple Video with Audio and/or Data, where only one fiber is available. Video, Audio and Data come in banks of two. Status indicators on Video, carrier detect, voltage, optical levels, and temperature are monitored via LEDs.

*numerous configurations available

System Design

All units come in small module or Insert Card versions. The cards can be inserted into our 18 slot, 19" *Multiverse*TM rack mountable card cage (CC-18-80W), or one of our smaller Desktop Card Racks (DTCR series). The FDV Series is compatible with the MDM-7000 series for multi-channel single-fiber solutions.

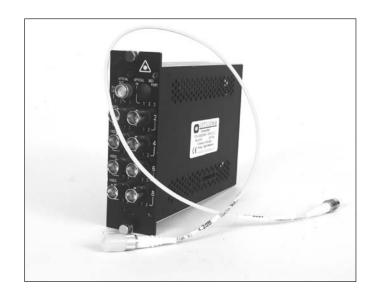

Features

- Multimode or singlemode operation over one fiber
- Digital transmission
- True DC restoration
- Flat frequency response
- Complies with RS-170 & RS-170A EIA & RS-250C short haul standards
- Traffic & intelligent transport system
- Compatible with NTSC, PAL, and SECAM video signals for CCTV
- No EMI or RFI and no ground loops
- Rack Mount hot swappable
- Various data protocols available from RS-232, RS-422, RS-485 or Contact Closure

Ontical

1310	1550 1270-1610 (CWDM)	Туре	Mode	Wavelength Suffix	Fiber Type	Output Power	Receiver Sensitivity	Budget Loss	Range*	Conn Type
•		LED	MM	L1	50/125µ 62.5/125µ	-8 dBm	-24 dBm	16 dB	3 km	ST
•		Laser	SM	L2	09/125µ	-3 dBm	-26 dBm	18 dB	25 km	FC
	•	Laser	SM	L3	09/125µ	-3 dBm	-26 dBm	23 dB	70 km	FC
	•	Laser	SM	L4	09/125µ	-4 dBm	-26 dBm	22 dB	25-70 km	FC

^{*} Chromatic dispersion and additional losses should be taken into account.

800-867-8426 • info@opticomm.com • www.opticomm.com • Contact Opticomm for custom requirements.

Composite Video, Audio & Data

Video

Video in/out impedance 75Ω

Video in/out level 1 volt peak to peak, 1.5 volts max

Video bandwidth 5 Hz to 7 MHz @ -3dB

Differential gain/phase < 1.0 % typical / < 0.7° typical

 $\label{eq:linearity} \mbox{Linearity/Tilt} \qquad \pm \ 0.9 \ \% \ \mbox{typical} \ / \le 0.5 \ \% \ \mbox{typical}$

Compatibility NTSC, PAL, SECAM, RS-170, RS-170A

Signal to noise ratio >68 dB using RS-250C short haul standards @ 1 km

Bit resolution 8-bit or 10-Bit

Connector type BNC

Audio

Audio in/out impedance 600 Ω or 10k Ω - balanced or unbalanced

Audio in/out level -6 to +6 dBm

Frequency response 10 Hz to 20 KHz

Signal to noise ratio > 90 dB weighted

Total harmonic distortion < 0.01%, 1 KHz at maximum modulation

Bit resolution 24-bit code
Connector type HD 15 Pin female

Data

Data rate DC to 1 Mbps

Bit error rate 10⁻⁹

Data formats available Async RS-232, RS-422, RC-485/2W, Genlock, Manchester,

20 mA current loop, Biphase, TTL, or six Contact Closures

Connector type HD 15 Pin female

General

Dimensions & Weight Stand Alone (SA): all others/DTCR-2: 7.16" L x 1.75" W x 6.5"H 53 oz

Insert card (IC): all others (2 slot): 6.3" L x 1.7" W x 4.0" H 29 oz

Temperature Operating: -20° C to +70° C; Storage; -30° C to +85° C

Humidity 0 to 95% non-condensing

Operating voltage $12 V_{DC}$ (200 mA) or 24 V_{AC} (300mA) or 110/220 V_{AC}

Vibration/Shock Up to 5 g's/Up to 12 g's

Diagnostics

Status monitoring LED indication

Optiva™ Configurable Communication Platform

Network Management

SDI & HD-SDI

Composite Video, Audio & Data

RGB/VGA/DVI

Audio/FSK/Intercom

Data (Ethernet/Serial/USB)

CATV/RF & L-Band

Optical Switching, Routing & Redundancy

Passive Multiplexing Solutions

Enclosures, Racks & Frames

Power Supplies & Accessories





 ϵ

FCC PART 15 COMPLIANT

MADE IN THE USA

Sample Configuration

