

ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET
RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W

DESCRIPTION


RD02MUS1B is a MOS FET type transistor specifically designed for VHF/UHF RF power amplifiers applications. RD02MUS1B improved a drain surge than RD02MUS1 by optimizing MOSFET structure.

FEATURES

High power gain:
Pout>2W, Gp>16dB
@Vdd=7.2V, f=175MHz, 520MHz
High Efficiency: 65%typ. (175MHz)
High Efficiency: 65%typ. (520MHz)


APPLICATION

For output stage of high power amplifiers
In VHF/UHF band mobile radio sets.

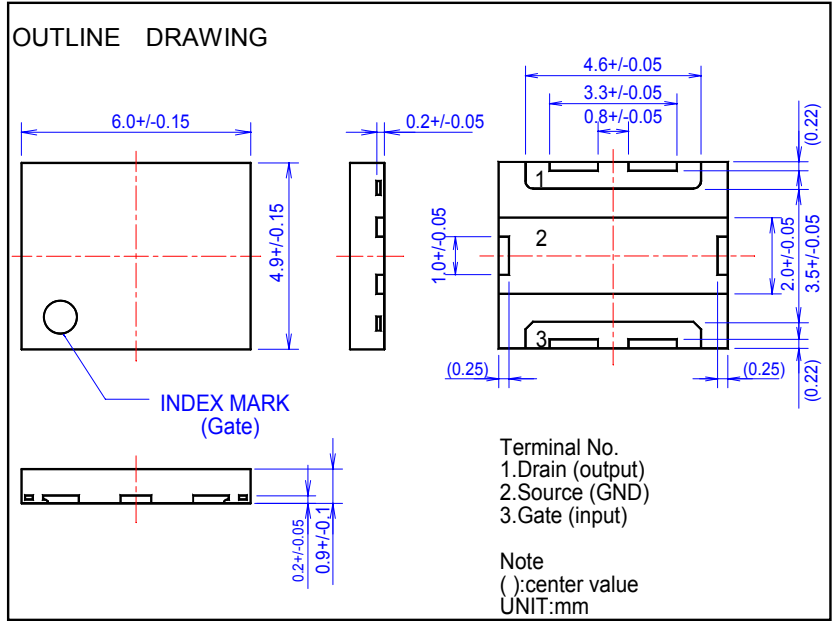

RoHS COMPLIANT

RD02MUS1B-101, T112 is a RoHS compliant products.
RoHS compliance is indicating by the letter "G" after the Lot Marking.
This product includes the lead in high melting temperature type solders.
However, it is applicable to the following exceptions of RoHS Directions.
1. Lead in high melting temperature type solders (i.e. tin-lead solder alloys containing more than 85% lead.)



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET
RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W

ABSOLUTE MAXIMUM RATINGS

(Tc=25°C UNLESS OTHERWISE NOTED)


SYMBOL	PARAMETER	CONDITIONS	RATINGS	UNIT
VDSS	Drain to source voltage	Vgs=0V	30	V
VGSS	Gate to source voltage	Vds=0V	+/-20	V
Pch	Channel dissipation	Tc=25°C	21.9	W
Pin	Input Power	Zg=Zl=50Ω	0.1	W
ID	Drain Current	-	1.5	A
Tch	Junction temperature	-	150	°C
Tstg	Storage temperature	-	-40 to +125	°C
Rth j-c	Thermal resistance	Junction to case	5.7	°C/W

Note: Above parameters are guaranteed independently.

ELECTRICAL CHARACTERISTICS (Tc=25°C, UNLESS OTHERWISE NOTED)

SYMBOL	PARAMETER	CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX.	
IDSS	Drain cutoff current	VDS=17V, VGS=0V	-	-	100	uA
IGSS	Gate cutoff current	VGS=10V, VDS=0V	-	-	1	uA
Vth	Gate threshold Voltage	VDS=12V, IDS=1mA	1	1.8	3	V
Pout1	Output power	VDD=7.2V, Pin=50mW, f=175MHz Idq=200mA	2	3	-	W
ηD1	Drain efficiency	f=175MHz Idq=200mA	55	65	-	%
Pout2	Output power	VDD=7.2V, Pin=50mW, f=520MHz Idq=200mA	2	3	-	W
ηD2	Drain efficiency	f=520MHz Idq=200mA	50	65	-	%
	Load VSWR tolerance	VDD=9.2V, Po=2W(Pin Control) f=175MHz, Idq=200mA, Zg=50Ω Load VSWR=20:1(All Phase)	No destroy			-
	Load VSWR tolerance	VDD=9.2V, Po=2W(Pin Control) f=520MHz, Idq=200mA, Zg=50Ω Load VSWR=20:1(All Phase)	No destroy			-

Note: Above parameters, ratings, limits and conditions are subject to change.










ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W

TYPICAL CHARACTERISTICS

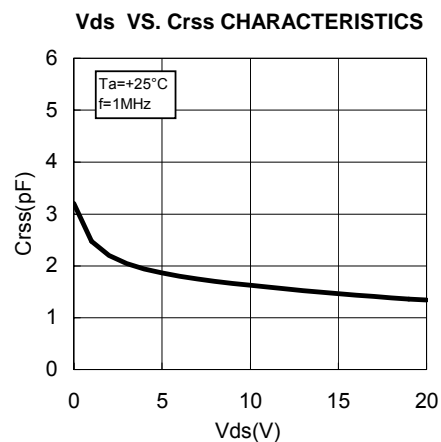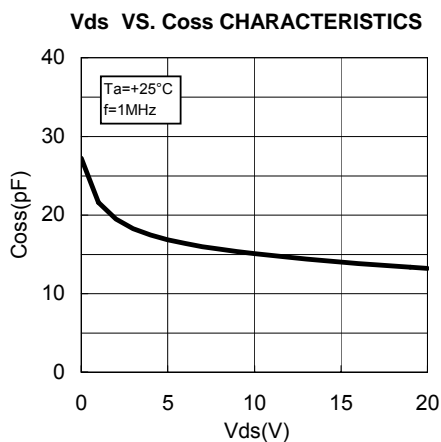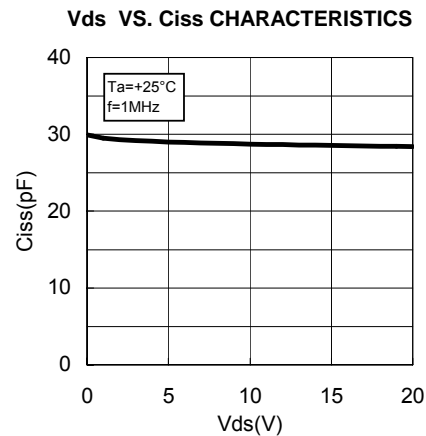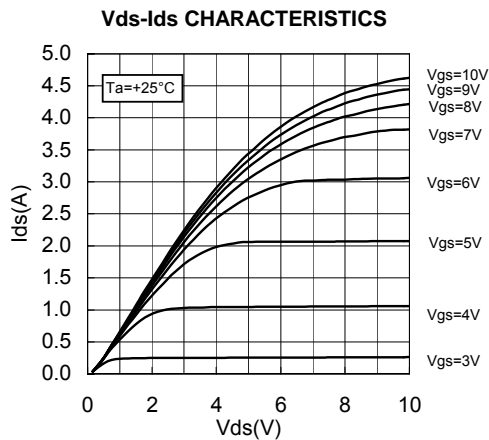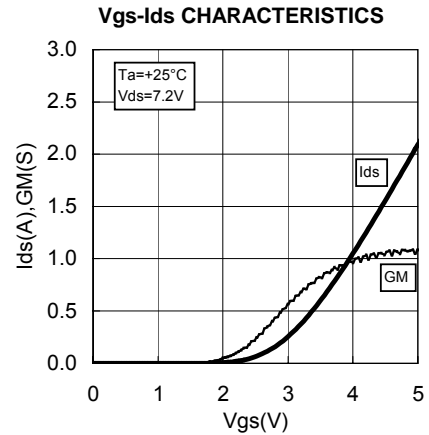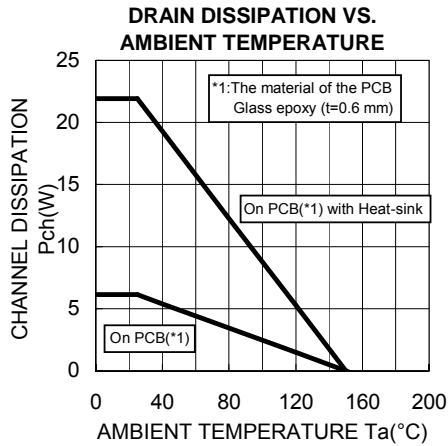









ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS


MITSUBISHI RF POWER MOS FET

RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W

TYPICAL CHARACTERISTICS

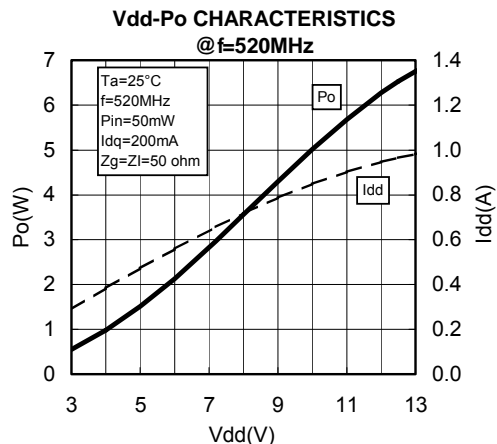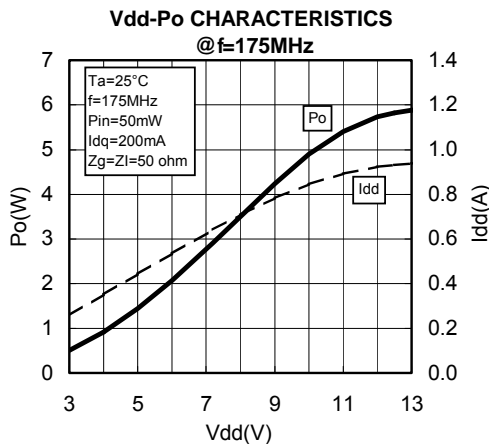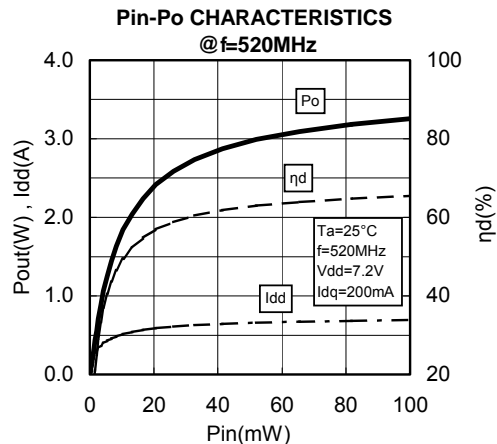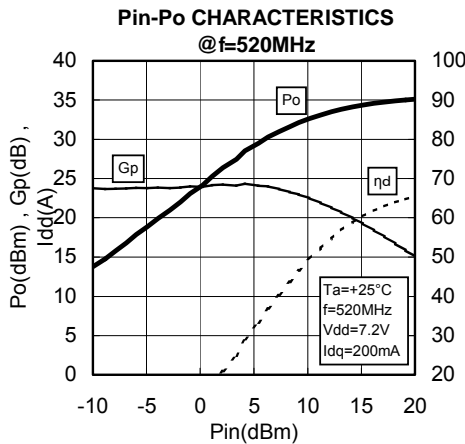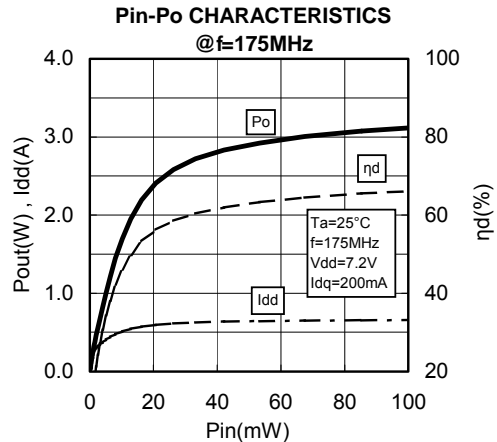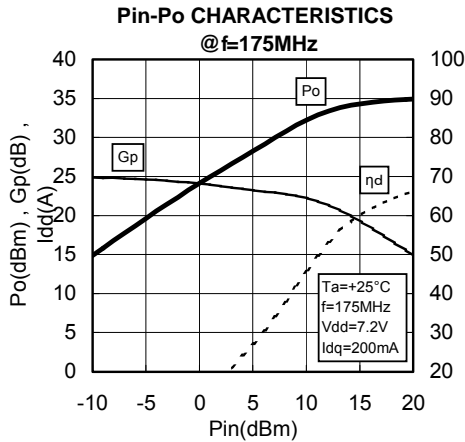




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET
RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W


TEST CIRCUIT(f=175MHz)

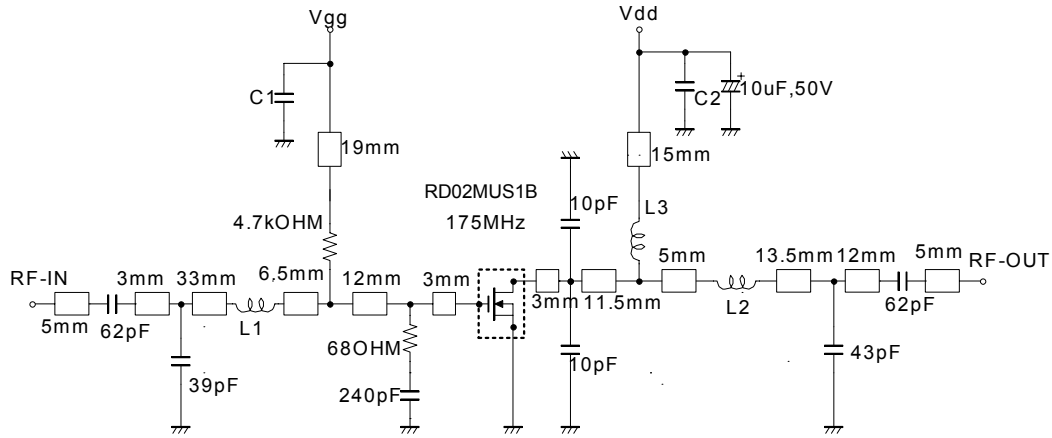

- L1: Enameled wire 5Turns, D:0.43mm, 2.46mm O.D
- L2: Enameled wire 3Turns, D:0.43mm, 2.46mm O.D
- L3: Enameled wire 9Turns, D:0.43mm, 2.46mm O.D
- C1, C2: 1000pF, 0.0022uF in parallel


Note: Board material-Teflon substrate
Micro strip line width=2.2mm/50OHM, er:2.7, t=0.8mm

TEST CIRCUIT(f=520MHz)

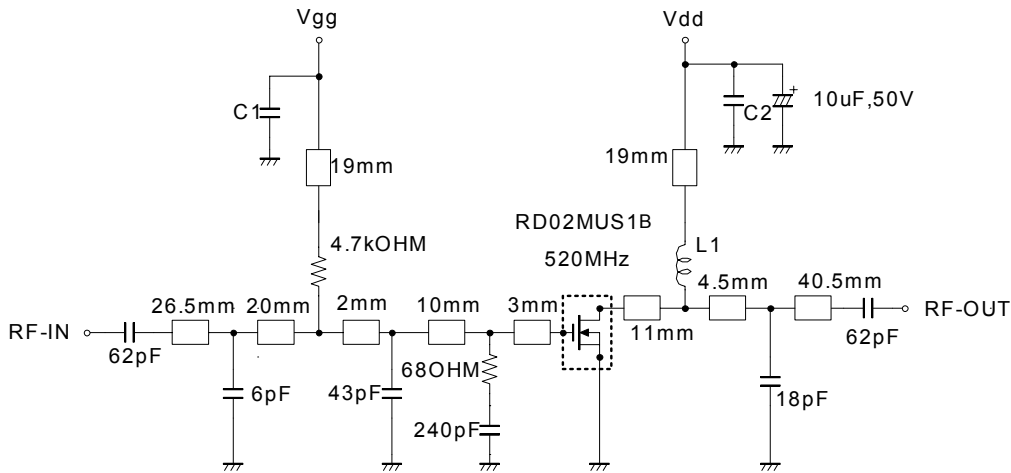

- L1: Enameled wire 9Turns, D:0.43mm, 2.46mm O.D
- C1, C2: 1000pF, 0.022uF in parallel

Note: Board material-Teflon substrate
Micro strip line width=2.2mm/50OHM, er:2.7, t=0.8mm




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET
RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W

INPUT/OUTPUT IMPEDANCE VS. FREQUENCY CHARACTERISTICS

175MHz Zin* Zout*
Zo=50Ω

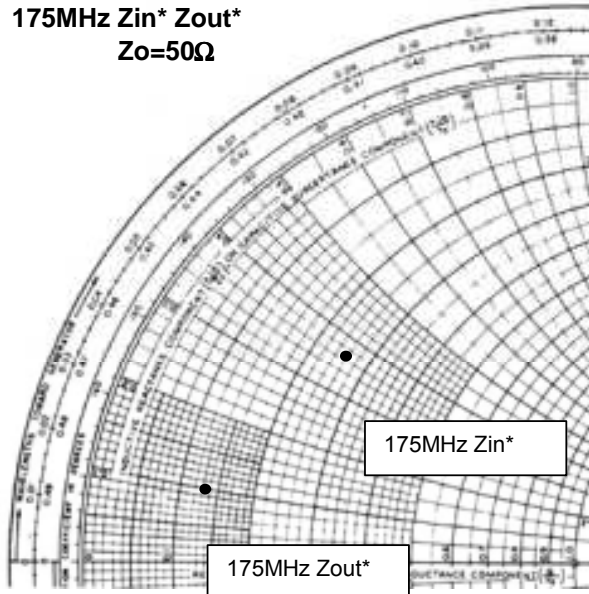


Vdd=7.2V, Idq=200mA(Vgg adj.), Pin=0.05W

Zin*=11.61+j17.88
Zout*=6.83+j5.21

Zin*: Complex conjugate of input impedance
Zout*: Complex conjugate of output impedance


520MHz Zin* Zout*
Zo=50Ω

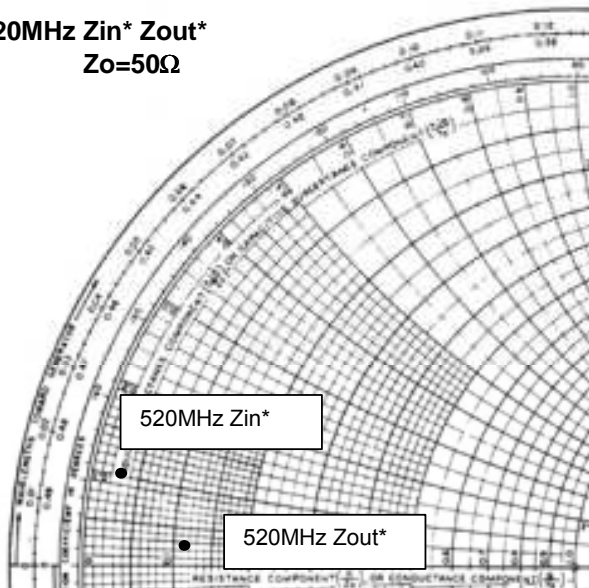

Vdd=7.2V, Idq=200mA(Vgg adj.), Pin=0.05W

Zin*=1.20+j5.47
Zout*=5.56+j1.31

Zin*: Complex conjugate of input impedance
Zout*: Complex conjugate of output impedance




ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET
RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W

RD02MUS1B S-PARAMETER DATA (@Vdd=7.2V, Id=200mA)

Freq. [MHz]	S11		S21		S12		S22	
	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)
100	0.847	-132.5	16.923	100.2	0.042	8.9	0.621	-118.8
135	0.828	-144.6	12.806	90.7	0.042	-0.1	0.598	-130.5
150	0.824	-148.1	11.555	87.5	0.042	-3.3	0.591	-133.7
175	0.817	-152.8	9.864	82.8	0.042	-7.6	0.590	-138.0
200	0.816	-156.2	8.579	78.6	0.041	-11.2	0.594	-141.2
250	0.816	-161.2	6.712	71.2	0.039	-17.6	0.609	-145.5
300	0.820	-164.9	5.436	64.9	0.038	-23.0	0.628	-148.8
350	0.827	-167.6	4.501	59.3	0.036	-28.2	0.653	-151.2
400	0.835	-169.9	3.813	54.0	0.034	-32.2	0.675	-153.5
450	0.844	-171.9	3.257	49.3	0.032	-36.5	0.699	-155.8
500	0.854	-173.6	2.823	44.9	0.031	-39.8	0.723	-157.7
520	0.858	-174.3	2.668	43.1	0.030	-41.1	0.732	-158.4
527	0.859	-174.7	2.613	42.6	0.030	-41.9	0.735	-158.6
550	0.862	-175.3	2.458	40.9	0.029	-43.2	0.743	-159.6
600	0.871	-176.7	2.161	37.1	0.027	-46.6	0.763	-161.5
650	0.878	-178.0	1.911	33.5	0.025	-49.5	0.781	-162.9
700	0.883	-179.4	1.701	30.4	0.024	-51.5	0.798	-164.6
750	0.890	-179.4	1.522	27.3	0.022	-54.4	0.811	-166.1
800	0.897	-178.3	1.368	24.4	0.021	-56.1	0.824	-167.7
850	0.899	-177.0	1.238	21.7	0.019	-58.7	0.836	-169.0
900	0.905	-176.0	1.123	19.3	0.018	-59.4	0.845	-170.3
950	0.907	-175.1	1.025	17.1	0.016	-60.7	0.853	-171.4
1000	0.913	-174.3	0.937	14.9	0.015	-62.1	0.861	-172.5
1050	0.915	-173.2	0.859	12.9	0.013	-64.4	0.870	-173.5
1100	0.918	-172.6	0.794	11.0	0.012	-64.9	0.874	-174.6



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

MITSUBISHI RF POWER MOS FET
RD02MUS1B

RoHS Compliance, Silicon MOSFET Power Transistor 175MHz, 520MHz, 2W

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

warning !

Do not use the device at the exceeded the maximum rating condition. In case of plastic molded devices, the exceeded maximum rating condition may cause blowout, smoldering or catch fire of the molding resin due to extreme short current flow between the drain and the source of the device. These results causes in fire or injury.