


## Single Operational Amplifier with Darlington Input

TCA 332  
TCA 335

### Features


- High input impedance
- Wide common-mode range
- Large supply-voltage range
- Large control range
- High output current
- Simple frequency compensation
- Wide temperature range (TCA 332)
- NPN Darlington input
- Open collector output

### Bipolar IC

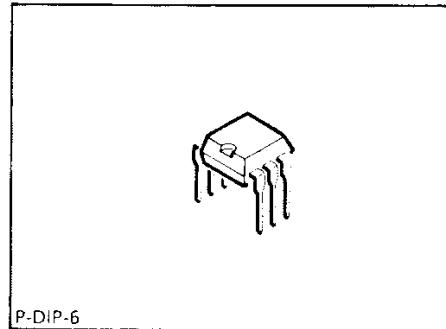

### Applications

- Amplifier
- Comparator
- Level converter
- Impedance converter
- Driver

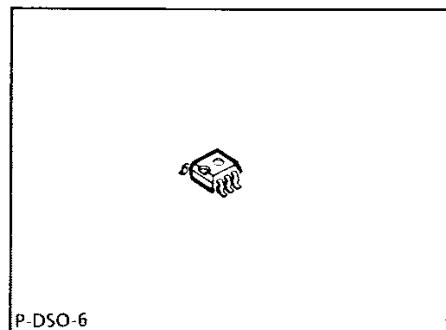


| Type          | Ordering Code     | Package       | Color Code    |
|---------------|-------------------|---------------|---------------|
| ■ S TCA 332 A | Q67000-A2272      | P-DIP-6       | —             |
| ■ TCA 332 G   | Q67000-A2270      | P-DSO 6 (SMD) | orange/yellow |
| ■ S TCA 335 A | Q67000-A563       | P-DIP-6       | —             |
| ■ S TCA 335 G | Q67000-A1018-G403 | P-DSO-6       | blue/yellow   |

■ = Not for new design

For TCA 315 and TCA 325 see chapter "Comparators".


These op amps are particularly economic and versatile. Owing to their excellent performance characteristics they are well suited for a wide scope of applications, such as measuring and control engineering, automotive electronics, AF circuits, analog computers, etc. The low input current of these amplifiers is particularly advantageous for application in measuring and control systems.

### Circuit Diagram

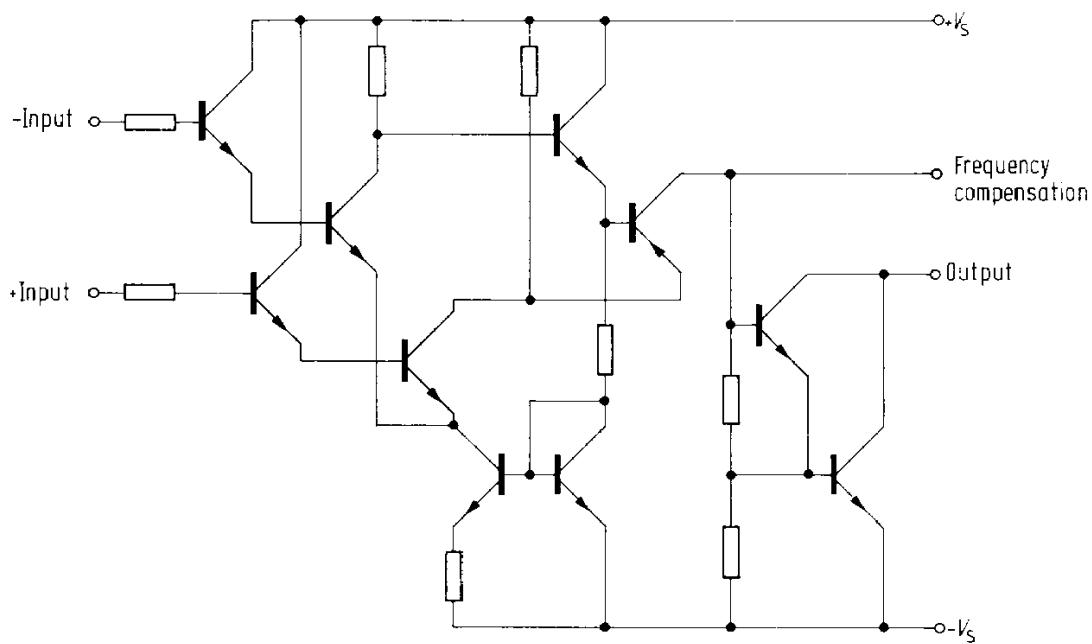


### Pin Configurations (top view)


**TCA 332 A**  
**TCA 335 A**

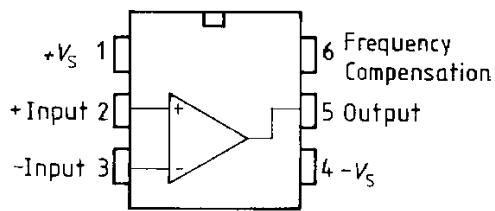

**TCA 332 G**  
**TCA 335 G**

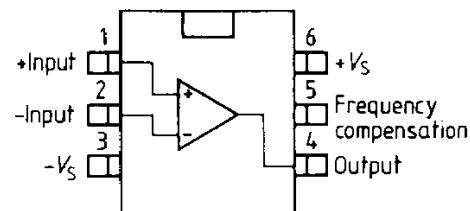

### Connection Diagram

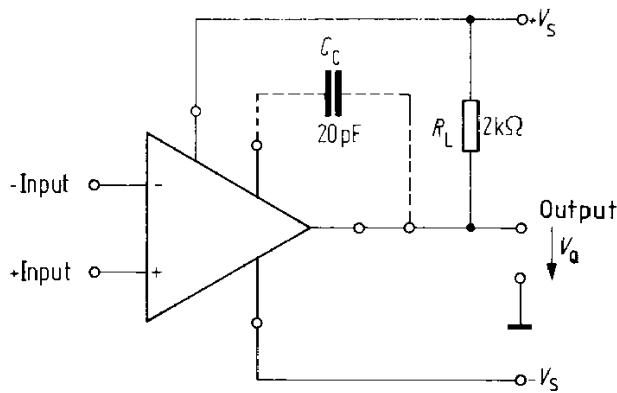

$C_C$  = output frequency compensation  
 $R_L$  = load resistance (collector resistance)

**Absolute Maximum Ratings**

| Parameter  | Symbol                       | Limit Values | Unit               |
|--|------------------------------|--------------|--------------------|
| Supply voltage                                   | $V_S$                        | $\pm 15$     | V                  |
| Output current                                   | $I_Q$                        | 70           | mA                 |
| Differential input voltage: $V_S = 13$ to $15$ V | $V_{ID}$                     | $\pm 13$     | V                  |
| Differential input voltage: $V_S = 2$ to $13$ V  | $V_{ID}$                     | $\pm V_S$    | V                  |
| Junction temperature                             | $T_j$                        | 150          | $^{\circ}\text{C}$ |
| Storage temperature range                        | $T_{stg}$                    | -55 to 125   | $^{\circ}\text{C}$ |
| Thermal resistance<br>system - air               | $R_{th\ SA}$<br>$R_{th\ SA}$ | 115<br>200   | K/W<br>K/W         |

**Operating Range**

|                     |       |                     |                    |
|---------------------|-------|---------------------|--------------------|
| Supply voltage      | $V_S$ | $\pm 2$ to $\pm 15$ | V                  |
| Ambient temperature | $T_A$ | -55 to 125          | $^{\circ}\text{C}$ |

**Characteristics** $V_S = \pm 5$  V to  $\pm 15$  V $R_L = 2$  k $\Omega$ , unless otherwise specified

| Parameter   | Symbol                                    | Limit Values<br>$T_A = 25$ $^{\circ}\text{C}$ |      |                | Limit Values<br>$T_A = -55$ to $125$ $^{\circ}\text{C}$ |              |                | Unit           |
|---|---|---|------|----------------|---|--------------|----------------|----------------|
|   |   | min.  | typ. | max.           | min.  | max.         |                |                |
| Open-loop supply current consumption  | $I_S$                                     |   | 1.5  | 2.5            |   | 2.5          |                | mA             |
| Input offset voltage<br>$R_G = 50$ $\Omega$   | $V_{IO}$                                  | -10   |      | 10             | -15   | 15           |                | mV             |
| Input offset current<br>Input current<br>Input current<br>$V_{ID} = \pm 13$ V                                   | $I_{IO}$<br>$I_I$<br>$I_I$                | -5  | 5    | 5<br>15<br>200 | -10   | 10<br>25     |                | nA<br>nA<br>nA |
| Control range<br>$V_S = \pm 15$ V<br>$R_L = 620$ $\Omega$ , $V_S = \pm 15$ V<br>$V_S = \pm 15$ V, $f = 100$ kHz | $V_{Q\ pp}$<br>$V_{Q\ pp}$<br>$V_{Q\ pp}$ | 14.9<br>14.9                                  |      | $\pm 10$       | -14.0<br>-12.5  | 14.8<br>14.8 | -14.0<br>-12.0 | V<br>V<br>V    |

**Characteristics** $V_S = \pm 5 \text{ V to } \pm 15 \text{ V}$ ;  $R_L = 2 \text{ k}\Omega$ , unless otherwise specified

| Parameter   | Symbol                           | Limit Values<br>$T_A = 25^\circ\text{C}$ |                |           | Limit Values<br>$T_A = -55$<br>to $125^\circ\text{C}$ |           | Unit                                      |
|---|----------------------------------|--|----------------|-----------|---|-----------|---|
|   |                                  | min.                                     | typ.           | max.      | min.  | max.      |   |
| Input impedance<br>$f = 1 \text{ kHz}$  | $Z_I$                            |  | 3              |           |   |           | $\text{M}\Omega$                          |
| Open-loop<br>voltage gain<br>$f = 1 \text{ kHz}$<br>$R_L = 10 \text{ k}\Omega$ , $f = 1 \text{ kHz}$<br>$f = 1 \text{ MHz}$ | $G_{V0}$<br>$G_{V0}$<br>$G_{V0}$ | 80                                       | 83<br>88<br>43 |           | 75  |           | $\text{dB}$<br>$\text{dB}$<br>$\text{dB}$ |
| Common-mode input<br>voltage range  | $V_{IC}$                         | $-V_S + 2$                               |                | $V_S - 2$ | $-V_S + 3$  | $V_S - 3$ | V   |
| Common-mode rejection<br>$R_L = 2 \text{ k}\Omega$  | $k_{CMR}$                        | 75                                       | 80             |           | 70  |           | $\text{dB}$                               |
| Supply voltage<br>rejection<br>$G_V = 100$  | $k_{SVR}$                        |  | 25             | 200       |   | 200       | $\mu\text{V/V}$                           |
| Temperature coefficient of $V_{IO}$<br>$R_G = 50 \Omega$  | $\alpha_{VIO}$                   |  | 12             | 50        |   | 50        | $\mu\text{V/K}$                           |
| Temperature coefficient of $I_{IO}$<br>$R_G = 50 \Omega$  | $\alpha_{IIO}$                   |  | 50             |           |   |           | $\text{pA/K}$                             |
| Slew rate<br>of $V_Q$ for non-inverting<br>operation <sup>1)</sup><br>(see TAA 765, test circuit 1)                         | SR                               |  | 9              |           |   |           | $\text{V}/\mu\text{s}$                    |
| Slew rate<br>of $V_Q$ for inverting operation <sup>1)</sup><br>(see TAA 765, test circuit 2)                                | SR                               |  | 18             |           |   |           | $\text{V}/\mu\text{s}$                    |
| Output saturation<br>voltage<br>$I_Q = 10 \text{ mA}$   | $V_{Qsat}$                       |  |                | 1         |   |           | V   |
| Output reverse current  | $I_{QR}$                         |  |                | 1         |   | 5         | $\mu\text{A}$                             |

**Characteristics** $V_S = \pm 2 \text{ V}$ ,  $R_L = 2 \text{ k}\Omega$ 

|   |                   |     |   |         |     |          |             |
|---|-------------------|-----|---|---------|-----|----------|-------------|
| Input offset voltage<br>$R_G = 50 \Omega$     | $V_{IO}$          | -10 |   | 10      | -15 | 15       | mV          |
| Input offset current<br>Input current         | $I_{IO}$<br>$I_I$ | -5  | 5 | 5<br>15 | -10 | 10<br>25 | nA<br>nA    |
| Open-loop voltage gain<br>$f = 1 \text{ kHz}$ | $G_{V0}$          | 75  |   |         | 70  |          | $\text{dB}$ |

1) For the relationship between power bandwidth and slew rate refer to "Introduction to Operational Amplifiers"

**Absolute Maximum Ratings**

| Parameter  | Symbol             | Limit Values | Unit               |
|--|--------------------|--------------|--------------------|
| Supply voltage                                   | $V_S$              | $\pm 15$     | V                  |
| Output current                                   | $I_Q$              | 70           | mA                 |
| Differential input voltage: $V_S = 13$ to $15$ V | $V_{ID}$           | $\pm 13$     | V                  |
| Differential input voltage: $V_S = 2$ to $13$ V  | $V_{ID}$           | $\pm V_S$    | V                  |
| Junction temperature                             | $T_j$              | 150          | $^{\circ}\text{C}$ |
| Storage temperature range                        | $T_{\text{stg}}$   | -55 to 125   | $^{\circ}\text{C}$ |
| Thermal resistance<br>system – air               | $R_{\text{th SA}}$ | 115          | K/W                |
| TCA 335 A  |                    | 200          | K/W                |
| TCA 335 G  |                    |              |                    |

**Operating Range**

|                     |       |                     |                    |
|---------------------|-------|---------------------|--------------------|
| Supply voltage      | $V_S$ | $\pm 2$ to $\pm 15$ | V                  |
| Ambient temperature | $T_A$ | -25 to 85           | $^{\circ}\text{C}$ |

**Characteristics**

$V_S = \pm 5$  V to  $\pm 15$  V;  $R_L = 2$  k $\Omega$ ,  
unless otherwise specified

| Parameter   | Symbol                                       | Limit Values<br>$T_A = 25$ $^{\circ}\text{C}$ |      |                 | Limit Values<br>$T_A = -25$ to $85$ $^{\circ}\text{C}$ |                | Unit           |
|---|--|---|------|-----------------|--|----------------|----------------|
|   |  | min.  | typ. | max.            | min.   | max.           |                |
| Open-loop supply current consumption  | $I_S$  |   | 1.5  | 2.5             |  | 2.5            | mA             |
| Input offset voltage<br>$R_G = 50$ $\Omega$   | $V_{IO}$                                     | -15   |      | 15              | -18  | 18             | mV             |
| Input offset current<br>Input current<br>Input current<br>$V_{ID} = \pm 13$ V                                   | $I_{IO}$<br>$I_I$<br>$I_I$                   | -10   | 5    | 10<br>25<br>200 | -20  | 20<br>35       | nA<br>nA<br>nA |
| Control range<br>$V_S = \pm 15$ V<br>$R_L = 620$ $\Omega$ , $V_S = \pm 15$ V<br>$V_S = \pm 15$ V, $f = 100$ kHz | $V_{Q_{PP}}$<br>$V_{Q_{PP}}$<br>$V_{Q_{PP}}$ | 14.9  |      | -14.0<br>-12.5  | 14.8   | -14.0<br>-12.0 | V<br>V<br>V    |

**Characteristics**

$V_S = \pm 5 \text{ V}$  to  $\pm 15 \text{ V}$ ;  $R_L = 2 \text{ k}\Omega$ ,  
unless otherwise specified

| Parameter  | Symbol                           | Limit Values<br>$T_A = 25^\circ\text{C}$ |                |           | Limit Values<br>$T_A = -25$<br>to $85^\circ\text{C}$ |           | Unit                                      |
|--|----------------------------------|--|----------------|-----------|--|-----------|---|
|  |                                  | min.                                     | typ.           | max.      | min.   | max.      |   |
| Input impedance<br>$f = 1 \text{ kHz}$   | $Z_I$                            |  | 3              |           |  |           | $\text{M}\Omega$                          |
| Open-loop voltage gain<br>$f = 1 \text{ kHz}$<br>$R_L = 10 \text{ k}\Omega$ , $f = 1 \text{ kHz}$<br>$f = 1 \text{ MHz}$ | $G_{V0}$<br>$G_{V0}$<br>$G_{V0}$ | 75                                       | 80<br>85<br>43 |           | 75   |           | $\text{dB}$<br>$\text{dB}$<br>$\text{dB}$ |
| Common-mode input voltage range  | $V_{IC}$                         | $-V_S + 2$                               |                | $V_S - 2$ | $-V_S + 3$   | $V_S - 3$ | V   |
| Common-mode rejection  | $k_{CMR}$                        | 70                                       | 78             |           | 70   |           | $\text{dB}$                               |
| Supply voltage rejection<br>$G_V = 100$  | $k_{SVR}$                        |  | 25             | 200       |  | 200       | $\mu\text{V/V}$                           |
| Temperature coefficient of $V_{IO}$<br>$R_G = 50 \Omega$   | $\alpha_{VIO}$                   |  | 12             | 50        |  | 50        | $\mu\text{V/K}$                           |
| Temperature coefficient of $I_{IO}$<br>$R_G = 50 \Omega$   | $\alpha_{IIO}$                   |  | 50             |           |  |           | $\text{pA/K}$                             |
| Slew rate<br>of $V_Q$ for non-inverting operation <sup>1)</sup><br>(see TAA 765, test circuit 1)                         | SR                               |  | 9              |           |  |           | $\text{V}/\mu\text{s}$                    |
| Slew rate<br>of $V_Q$ for inverting operation <sup>1)</sup><br>(see TAA 765, test circuit 2)                             | SR                               |  | 18             |           |  |           | $\text{V}/\mu\text{s}$                    |
| Output saturation voltage<br>$I_Q = 10 \text{ mA}$   | $V_{Qsat}$                       |  |                | 1         |  |           | V   |
| Output reverse current   | $I_{QR}$                         |  |                | 10        |  | 20        | $\mu\text{A}$                             |

**Characteristics**

$V_S = \pm 2 \text{ V}$ ,  $R_L = 2 \text{ k}\Omega$

|   |                   |     |   |          |     |          |             |
|---|-------------------|-----|---|----------|-----|----------|-------------|
| Input offset voltage<br>$R_G = 50 \Omega$     | $V_{IO}$          | -17 |   | 17       | -20 | 20       | mV          |
| Input offset current<br>Input current         | $I_{IO}$<br>$I_I$ | -10 | 5 | 10<br>25 | -20 | 20<br>35 | nA<br>nA    |
| Open-loop voltage gain<br>$f = 1 \text{ kHz}$ | $G_{V0}$          | 70  |   |          | 70  |          | $\text{dB}$ |

1) For the relationship between power bandwidth and slew rate refer to "Introduction to Operational Amplifiers"

