

MTC75-150 Series



- 10-40 VDC Input Range
- Designed for Vetric & Avionic Use
- -55 °C to +100 °C Operation
- EMI Performance to MIL-STD 461F
- Input Immunity to MIL-STD 1275A/B/C/D
- Environments to MIL-STD 810F
- 3 Year Warranty

Specification

Input

Input Voltage Range	• 10.0-40.0 VDC
Transient Input Range	• 50 VDC for 100 ms
Inrush Current	• <40 A at 28 VDC
Turn On	• >8.7 VDC
Turn Off	• <8.0 VDC
Input Reverse Voltage Protection	• None
Input Current	• See table

Output

Output Voltage	• See table
Output Voltage Trim	• -20%, +10% ($\pm 10\%$ for 3.3 V version), see note 4
Minimum Load	• No minimum load required on single output models, 5% load required on each output of dual output models
Line Regulation	• $\pm 1\%$ Vout nominal
Load Regulation	• Single Output: $\pm 1\%$ Vout nominal, Dual Output: $\pm 2\%$
Output Set Tolerance	• $\pm 1.5\%$ max
Ripple & Noise	• ≤ 5 Vout: 50 mV pk-pk max, > 5 Vout: 100 mV pk-pk, at max load and 20 MHz bandwidth
Overvoltage Protection	• 120-140% Vout max
Overcurrent Protection	• 110-140% at nominal input voltage
Short Circuit Protection	• Output turns off until the short is removed
Maximum Capacitive Load	• 300 μ F x Iout max for startup within 100 ms
Thermal Warning	• Active when internal temp is > 105 °C
Remote Sense	• 10 %, see note 4
Cross Regulation	• $\pm 4\%$ on dual outputs, see note 2
Transient Response	• $\pm 4\%$ max deviation recovery to within 1% in 500 μ s for a 50% load change at 0.1 A/ μ s
Start Up Time	• <100 ms
Start Up Rise Time	• <20 ms
Current Share	• Parallel up to 4 modules, single output versions only
Temperature Coefficient	• 0.03%/°C
Remote On/Off	• On = > 3.5 V or open circuit, Off = < 1.8 V

General

Efficiency	• See table
Isolation	• 1500 VDC Input to Output 1000 VDC Input to Case 1000 VDC Output to Case
Isolation Capacitance	• 2500 pF
Switching Frequency	• Fixed, 450 kHz typical
Frequency Synchronization	• 450-550 kHz
MTBF	• > 1 Mhrs to MIL-HDBK-217F at 25 °C, GF

Environmental

Case Temperature	• -40 °C to +100 °C (start up at -55 °C)
Operating Humidity	• 95% Relative Humidity 240h MIL-STD-810F Method 507.4
Storage Temperature	• -60 °C to +125 °C
Operating Altitude	• Tested to 70000 ft (21336 m)
Shock	• 75 g MIL-STD-810F Method 516.5
Vibration	• 15 to 2000 Hz MIL-STD-810F Method 514.5, table 514.5-VIII
Bump	• 2000 Bumps in each axis 40 g MIL-STD-810F Method 516.5
Salt Atmosphere	• 48 hours MIL-STD-810F Method 509.4

EMC

Conducted Emissions	• EN55022 Conducted Level B* MIL-STD 461F: CE102*
Immunity	• MIL-STD-704 B-F, MIL-STD-1275A/B/C/D*
Conducted Susceptibility	• MIL-STD-461F CS101, CS114, CS115, CS116*

* When used in conjunction with standard EMI filter and surge protection modules, DSF and FSO series. Consult longform datasheet.

Models and Ratings


Output Power	Output Voltage	Output Current	Input Current ⁽¹⁾		Efficiency ⁽¹⁾	Model Number
			No Load	Full Load		
66 W	3.3 VDC	20.00 A	120 mA	2.87 A	82%	MTC7528S3V3
75 W	5.0 VDC	15.00 A	130 mA	3.19 A	84%	MTC7528S05
75 W	12.0 VDC	6.25 A	60 mA	3.19 A	84%	MTC7528S12
75 W	15.0 VDC	5.00 A	40 mA	3.19 A	84%	MTC7528S15
75 W	28.0 VDC	2.70 A	75 mA	3.23 A	83%	MTC7528S28
75 W	±12.0 VDC	±3.13 A ⁽³⁾	220 mA	3.23 A	83%	MTC7528D12 ⁽²⁾
75 W	±15.0 VDC	±2.50 A ⁽³⁾	230 mA	3.27 A	82%	MTC7528D15 ⁽²⁾
132 W	3.3 VDC	40.00 A	120 mA	5.82 A	81%	MTC15028S3V3
150 W	5.0 VDC	30.00 A	147 mA	6.38 A	84%	MTC15028S05
150 W	12.0 VDC	12.50 A	70 mA	6.38 A	84%	MTC15028S12
150 W	15.0 VDC	10.00 A	75 mA	6.30 A	86%	MTC15028S15
150 W	28.0 VDC	5.35 A	170 mA	6.30 A	86%	MTC15028S28
150 W	±12.0 VDC	±6.25 A ⁽³⁾	250 mA	6.38 A	84%	MTC15028D12 ⁽²⁾
150 W	±15.0 VDC	±5.0 A ⁽³⁾	275 mA	6.31 A	85%	MTC15028D15 ⁽²⁾

Notes

1. Typical and measured at 28 V input
2. Minimum load of 5% required on one output for ±4% regulation on the other.
3. Each output can deliver 70% of the combined current when other output delivers between 5% and 30%.
4. Total of voltage trim and remote sense is +10% max.

Mechanical Details

Pin Connections					
Pin	Single Output	Dual Output	Pin	Single Output	Dual Output
1	+Vin	+Vin	7	-Sense	Trim
2	Remote On/Off	Remote On/Off	8*	Trim	Common
3	Thermal Warning (TW)	Thermal Warning (TW)	9	+Sense	No Pin
4	Case	Case	10	+Vout	+Vout
5	-Vin	-Vin	11	Share	No Pin
6	-Vout	-Vout	12	Synchronization	Synchronization

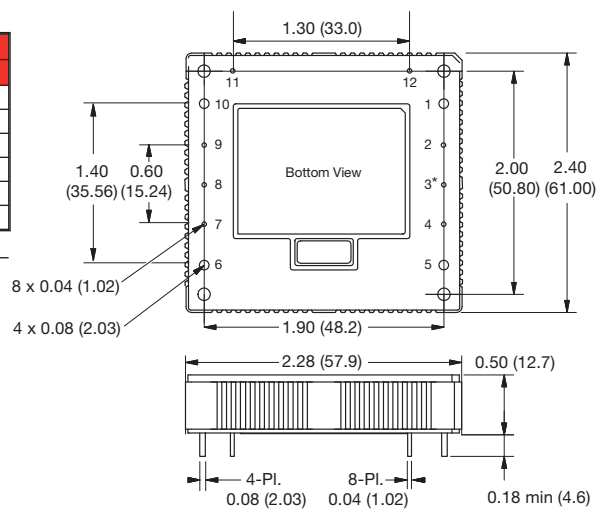

Notes

1. Dimensions are in inches (mm)
2. Tolerance: ±0.02 inches (±0.5 mm)
3. Weight: 0.28 lb (128 g) approx
4. Materials & Finish:
 - Pin - Material: Copper; Finish: Nickel plated 2.5 µm Ni and gold plated 0.3 µm Au.
 - Mounting Hole Diameter - 0.126 (3.2) clearance hole
 - Baseplate - Material: Aluminium
 - Case - Material: Non-conductive plastic

*On dual output versions, Pin 8 is 0.08 (2.03) Ø

Application Notes

Remote On/Off: This is an active low signal referenced to -Vin. If >3.5V (or open circuit) is applied, the output is on. If <1.8V (or short circuit) is applied, the output is off. If module inhibit is not required, leave the pin floating.


Thermal Warning (Tw): This is an open drain signal with source connected to -Vin. Transistor is off under normal conditions and is turned on when trip threshold is exceeded (typically 105 °C).

Thermal Shutdown: The output of the module can be optionally turned off under a high temperature condition by connecting the Thermal Warning (Tw) pin directly to the Remote On/Off pin. Auto resetting.

Synchronization: The internal switching frequency can be synchronized to an external source within the range 400 to 500kHz. Consult longform datasheet. If two modules or more are synchronized, they will run at the highest frequency. Connect synchronization pins directly together.

Share: Up to four modules can be forced to share by connecting the share pins directly together, derate maximum output to 90% of total power.

Output Trim: In order to trim the output voltage of the singles up or down, connect the trim resistor either between the trim pin and +sense for trimming-up or between trim pin and -sense for trimming-down. In order to trim the output voltage of the duals up or down, connect the trim resistor either between the trim pin and +Vout for trimming up or between trim pin and -Vout for trimming down. The trimming output voltage range is ±10% on 3V3 output voltage and -20% to +10% rated output voltage on others. See diagram & table right.

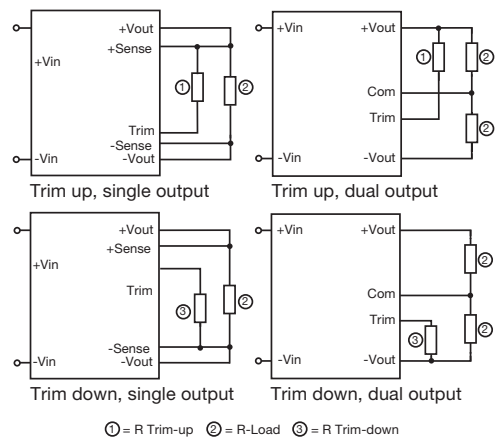

$$R_{trim-up} = \left[\frac{A}{1 - \frac{V_{nom}}{V_{required}}} - C \right] k\Omega$$

$$R_{trim-down} = \left[\frac{B}{\frac{V_{nom}}{V_{required}} - 1} - C \right] k\Omega$$

	S3V3	S05	S12	S15	S28	D12	D15
A	9.826	15	21.907	28.028	54.622	46.446	58.524
B	6	5	2.55	2.55	2.55	2.55	2.55
C	5.1	5.1	5.1	5.1	9.1	9.1	9.1

