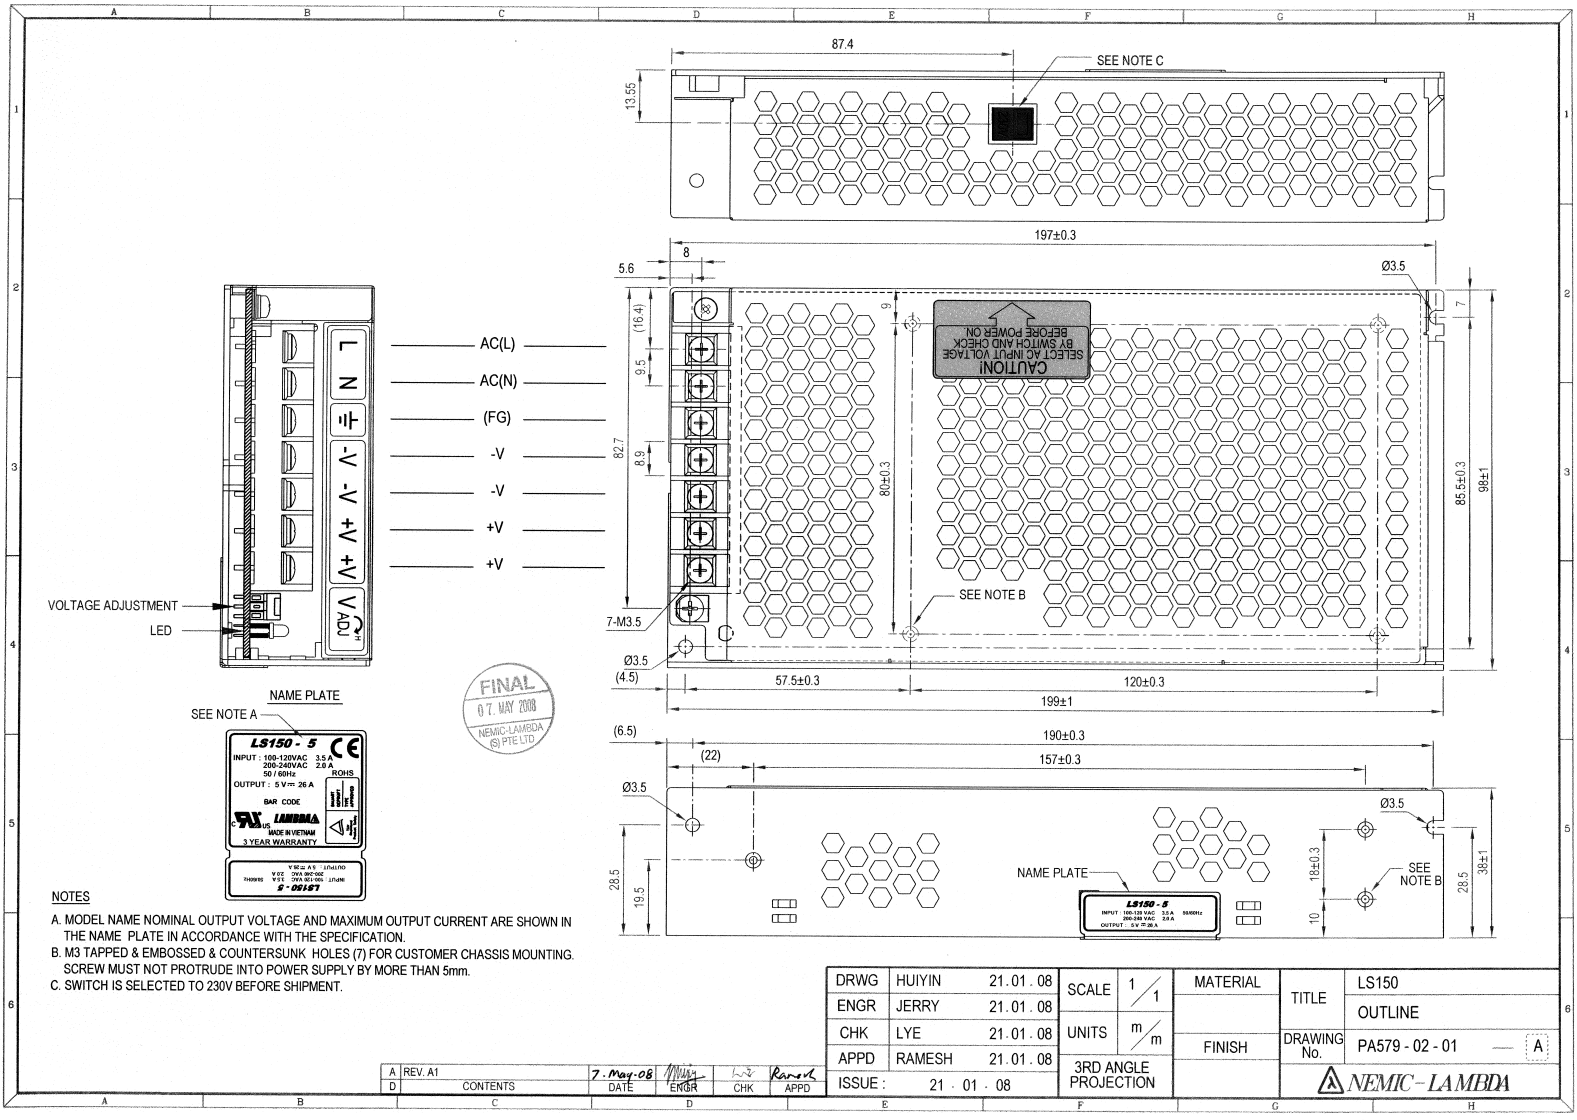

FINAL
07. MAY 2008
NEMIC-LAMBDA (S) PTE LTD

NOTES

A. MODEL NAME NOMINAL OUTPUT VOLTAGE AND MAXIMUM OUTPUT CURRENT ARE SHOWN IN THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATION.
B. M3 TAPPED & EMBOSSED & COUNTERSUNK HOLES (7) FOR CUSTOMER CHASSIS MOUNTING. SCREW MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 5mm.
C. SWITCH IS SELECTED TO 230V BEFORE SHIPMENT.

DRWG	HUIYIN	21.01.08
ENGR	JERRY	21.01.08
CHK	LYE	21.01.08
APPD	RAMESH	21.01.08
ISSUE :	21 . 01 . 08	

SCALE	1/1
UNITS	m/m
3RD ANGLE PROJECTION	

MATERIAL	
FINISH	

A	REV. A1	7-May-08			
D	CONTENTS	DATE	ENGR	CHK	APPD

TITLE	LS150
	OUTLINE
DRAWING No.	PA579 - 02 - 01 — A

NEMIC-LAMBDA

Downloaded from Elcodis.com electronic components distributor