

# Full-Featured E Series Multifunction DAQ

## 12 or 16-Bit, up to 1.25 MS/s, up to 64 Analog Inputs

### E Series – Full-Featured

- 16 or 64 analog inputs at up to 1.25 MS/s, 12 or 16-bit resolution
- 2 analog outputs at up to 1 MS/s, 12 or 16-bit resolution
- 8 digital I/O lines (TTL/CMOS); two 24-bit counter/timers
- Analog and digital triggering
- 14 or 15 analog input signal ranges
- NI-DAQ driver simplifies configuration and measurements

### Families

- NI 6071E
- NI 6070E
- NI 6062E
- NI 6052E
- NI 6040E
- NI 6033E
- NI 6032E
- NI 6031E
- NI 6030E
- NI 6020E (only digital triggering)

### Operating Systems

- Windows 2000/NT/XP
- Real-time performance with LabVIEW (page 134)
- Others such as Linux and Mac OS X (page 187)

### Recommended Software

- LabVIEW
- LabWindows/CVI
- Measurement Studio
- VI Logger

### Other Compatible Software

- Visual Basic, C/C++, and C#

### Driver Software (included)

- NI-DAQ 7

### Calibration Certificate Included

See page 21.



Family	Bus	Analog Inputs	Input Resolution	Max Sampling Rate	Input Range	Analog Outputs	Output Resolution	Output Rate	Output Range	Digital I/O	Counter/Timers	Triggers
NI 6071E	PCI, PXI	64 SE/32 DI	12 bits	1.25 MS/s	$\pm 0.05 \text{ to } \pm 10 \text{ V}$	2	12 bits	1 MS/s	$\pm 10 \text{ V}$	8	2, 24-bit	Analog, digital
NI 6070E	PCI, PXI, FireWire	16 SE/8 DI	12 bits	1.25 MS/s	$\pm 0.05 \text{ to } \pm 10 \text{ V}$	2	12 bits	1 MS/s	$\pm 10 \text{ V}$	8	2, 24-bit	Analog, digital
NI 6062E	PCMCIA	16 SE/8 DI	12 bits	500 kS/s	$\pm 0.05 \text{ to } \pm 10 \text{ V}$	2	12 bits	850 kS/s	$\pm 10 \text{ V}$	8	2, 24-bit	Analog, digital
NI 6052E	PCI, PXI, FireWire	16 SE/8 DI	16 bits	333 kS/s	$\pm 0.05 \text{ to } \pm 10 \text{ V}$	2	16 bits	333 kS/s	$\pm 10 \text{ V}$	8	2, 24-bit	Analog, digital
NI 6040E	PCI, PXI	16 SE/8 DI	12 bits	500 kS/s	$\pm 0.05 \text{ to } \pm 10 \text{ V}$	2	12 bits	1 MS/s	$\pm 10 \text{ V}$	8	2, 24-bit	Analog, digital
NI 6033E	PCI	64 SE/32 DI	16 bits	100 kS/s	$\pm 0.1 \text{ to } \pm 10 \text{ V}$	0	-	-	-	8	2, 24-bit	Analog, digital
NI 6032E	PCI	16 SE/8 DI	16 bits	100 kS/s	$\pm 0.1 \text{ to } \pm 10 \text{ V}$	0	-	-	-	8	2, 24-bit	Analog, digital
NI 6031E	PCI, PXI	64 SE/32 DI	16 bits	100 kS/s	$\pm 0.1 \text{ to } \pm 10 \text{ V}$	2	16 bits	100 kS/s	$\pm 10 \text{ V}$	8	2, 24-bit	Analog, digital
NI 6030E	PCI, PXI	16 SE/8 DI	16 bits	100 kS/s	$\pm 0.1 \text{ to } \pm 10 \text{ V}$	2	16 bits	100 kS/s	$\pm 10 \text{ V}$	8	2, 24-bit	Analog, digital
NI 6020E	NI USB	16 SE/8 DI	12 bits	100 kS/s	$\pm 0.05 \text{ to } \pm 10 \text{ V}$	2	12 bits	20 S/s	$\pm 10 \text{ V}$	8	2, 24-bit	Digital

Table 1. NI Full-Featured E Series Model Guide (See page 228 for detailed specifications.)

### Overview and Applications

NI Full-Featured E Series devices are the fastest and the most accurate multiplexed data acquisition devices available. They are ideal for applications ranging from continuous high-speed data logging to control applications to high voltage signal or sensor measurements when used with NI signal conditioning. Synchronize the operations of multiple devices using the RTSI bus or PXI trigger bus and easily integrate other hardware such as motion control and machine vision to create an entire measurement and control system.

Visit [ni.com/oem](http://ni.com/oem) for information on our quantity discounts for OEM customers.

### Highly Accurate Hardware Design

NI Full-Featured E Series DAQ devices include the following features and technologies:

**Temperature Drift Protection Circuitry** – Designed with components that minimize the effect of temperature changes on measurements to less than 0.0006% of reading per °C.

**Resolution-Improvement Technologies** – Carefully designed noise floor maximizes resolution.

**Onboard Self-Calibration** – Precise voltage reference included for calibration and measurement accuracy. Self-calibration is completely software controlled, with no potentiometers to adjust.

**NI DAQ-STC** – Timing and control ASIC designed to provide more flexibility, lower power consumption, and a higher immunity to noise and jitter than off-the-shelf counter/timer chips.

# Full-Featured E Series Multifunction DAQ

## 12 or 16-Bit, up to 1.25 MS/s, up to 64 Analog Inputs

**NI MITE** – ASIC designed to optimize data transfer for multiple simultaneous operations using bus mastering with three scatter-gather DMA channels for maximum performance of concurrent I/O operations.

**NI PGIA** – Measurement and instrument class amplifier that guarantees settling times at all gains. Typical commercial off-the-shelf amplifier components do not meet the settling time requirements for high-gain measurement applications.

**PFI Lines** – Eight programmable function input (PFI) lines that can be used for software-controlled routing of interboard and intraboard digital and timing signals.

**RTSI or PXI Trigger Bus** – Used to share timing and control signals between devices and synchronize operations.

**RSE Mode** – In addition to differential and nonreferenced single-ended modes, NI full-featured E Series devices offer referenced single-ended (RSE) mode for use with floating signal sources in applications with channel counts higher than eight.

**Onboard Temperature Sensor** – Included for monitoring the operating temperature of the device to ensure that it is operating within the specified range.

**Analog and Digital Triggering** – Only full-featured E Series devices provide the ability to set a trigger based on the level of an analog signal, in addition to the ability to trigger off an edge of a digital signal.

**More Input Ranges** – Up to 15 input ranges for optimal resolution, even for signals smaller than 50 mV.

### High-Performance, Easy-to-Use Driver Software

NI-DAQ is the robust driver software that makes it easy to access the functionality of your data acquisition hardware, whether you are a beginning or advanced user. Helpful features include:

**Automatic Code Generation** – DAQ Assistant is an interactive guide that steps you through configuring, testing, and programming measurement tasks, and generating the necessary code automatically for use in LabVIEW, LabWindows/CVI, or Measurement Studio.

**Cleaner Code Development** – Basic and advanced software functions have been combined into one easy-to-use yet powerful set to help you build cleaner code and move from basic to advanced applications without replacing functions.

**High-Performance Driver Engine** – Software-timed single-point input (typically used in control loops) with NI-DAQ achieves rates of up to 50 kHz. NI-DAQ also delivers maximum I/O system throughput with a multithreaded driver.

**Test Panels** – With NI-DAQ, you can test all of your device functionality before you begin development.

**Scaled Channels** – Easily scale your voltage data into the proper engineering units using the NI-DAQ Measurement Ready virtual channels by choosing from a list of common sensors and signals or creating your own custom scale.

**LabVIEW Integration** – All NI-DAQ functions use the waveform data type, which carries acquired data and timing information directly into more than 400 LabVIEW built-in analysis routines for display of results in engineering units on a graph.

### Worldwide Support and Services

NI provides you with a wealth of resources to help you get your application up and running more quickly, including:

**Technical Support** – Purchase of NI hardware or software gives you access to application engineers all over the world as well as Web resources with more than 3,000 measurement examples and more than 9,000 KnowledgeBase entries. – [ni.com/support](http://ni.com/support)

**NI Factory Installation Services (FIS)** – Software and hardware installed in PXI and PXI/SCXI systems, tested and ready to use – [ni.com/advisor](http://ni.com/advisor)

**Calibration** – Includes NIST-traceable basic calibration certificates, services for ANSI/NCSL-Z540 and periodic calibration – [ni.com/calibration](http://ni.com/calibration)

**Extended Warranty** – Meet project life-cycle requirements and maintain optimal performance in a cost-effective way – [ni.com/services](http://ni.com/services)

**Data Acquisition Training** – Instructor-led courses – [ni.com/training](http://ni.com/training)

**Professional Services** – Feasibility, consulting, and integration through our Alliance Partners – [ni.com/alliance](http://ni.com/alliance)

**For more information on NI services and support, please visit [ni.com/services](http://ni.com/services)**

**For information on device support in NI-DAQ 7, visit [ni.com/dataacquisition](http://ni.com/dataacquisition)**

# Full-Featured E Series Multifunction DAQ

## 12 or 16-Bit, up to 1.25 MS/s, up to 64 Analog Inputs

Models		Full-Featured E Series			Low-Cost E Series		Basic	
Nominal Range (V)		NI 6030E, NI 6031E, NI 6032E, NI 6033E	NI 6052E	NI 6070E, NI 6071E	NI 6040E	NI 6034E, NI 6036E	NI 6023E, NI 6024E, NI 6025E	PCI-6013, PCI-6014
Positive FS	Negative FS	Absolute Accuracy (mV)						
10	-10	1.147	4.747	14.369	15.373	7.56	16.504	8.984
5	-5	2.077	0.876	5.193	5.697	1.79	5.263	2.003
2.5	-2.5	-	1.190	3.605	3.859	-	-	-
2	-2	0.836	-	-	-	-	-	-
1	-1	0.422	0.479	1.452	1.556	-	-	-
0.5	-0.5	0.215	0.243	0.735	0.789	0.399	0.846	0.471
0.25	-0.25	-	0.137	0.379	0.405	-	-	-
0.2	-0.2	0.102	-	-	-	-	-	-
0.1	-0.1	0.061	0.064	0.163	0.176	-	-	-
0.05	-0.05	-	0.035	0.091	0.100	0.0611	0.106	0.069
10	0	0.976	1.232	6.765	7.269	-	-	-
5	0	1.992	2.119	5.391	5.645	-	-	-
2	0	0.802	0.850	2.167	2.271	-	-	-
1	0	0.405	0.428	1.092	1.146	-	-	-
0.5	0	0.207	0.242	0.558	0.583	-	-	-
0.2	0	0.098	0.111	0.235	0.247	-	-	-
0.1	0	0.059	0.059	0.127	0.135	-	-	-

Note: Accuracies are valid for measurements following an internal calibration. Measurement accuracies are listed for operational temperatures within  $\pm 1^{\circ}\text{C}$  of internal calibration temperature and  $\pm 10^{\circ}\text{C}$  of external or factory-calibration temperature. One-year calibration interval recommended. The Absolute Accuracy at Full Scale calculations were performed for a maximum range input voltage (for example, 10 V for the  $\pm 10\text{ V}$  range) after one year, assuming 100 pt averaging of data.\*Smallest detectable voltage change in the input signal at the smallest input range.

Table 2. E Series Analog Input Absolute Accuracy Specifications

Models		Full-Featured E Series			Low-Cost E Series		Basic
Nominal Range (V)		NI 6030E, NI 6031E, NI 6032E, NI 6033E	NI 6052E	NI 6070E, NI 6071E	NI 6040E	PCI-6036E	PCI-6024E, NI 6025E,
Positive FS	Negative FS	Absolute Accuracy (mV)					
10	-10	1.43	1.405	8.127	8.127	2.417	8.127
10	0	1.201	1.176	5.685	5.685	-	-

Table 3. E Series Analog Output Absolute Accuracy Specifications

## Recommended Accessories

Signal conditioning is required for sensor measurements or voltage inputs greater than 10 V. National Instruments SCXI is a versatile, high-performance signal conditioning platform, intended for high-channel-count applications. NI SCC products provide portable, flexible signal conditioning options on a per-channel basis. Both signal conditioning platforms are designed to increase the performance and reliability of your DAQ System, and are up to 10X more accurate than terminal blocks (please visit [ni.com/sigcon](http://ni.com/sigcon) for more details). Refer to the table below for more information:

Sensor/Signals (>10 V)			
System Description	DAQ Device	Signal Conditioning	Page
High performance	PCI-60xxE, PXI-60xxE, DAQPad-60xxE	SCXI	270
Low-cost, portable	PCI-60xxE, PXI-60xxE, DAQPad-60xxE	SCC	251

Signals (<10 V) <sup>1</sup>			
System Description	DAQ Device	Terminal Block	Cable
Shielded	PCI-60xxE/DAQPad-60xxE	SCB-68	SH6868-EP
Shielded	PXI-60xxE	TB-2705	SH6868-EP
Shielded	PCI-6071E/PCI-6033E/PCI-6031E	SCB-100	SH100100
Shielded	PXI-6071E/PXI-6031E	Two TBX-68s	SH1006868
Shielded	DAQPad-60xxE	SCB-68	SHC6868-EP
Low-Cost	PCI-60xxE/PXI-60xxE/DAQPad-60xxE	CB-68LP	R6868
Low-Cost	DAQCard-60xxE	CB-68LP	RC6868

<sup>1</sup>Terminal Blocks do not provide signal conditioning (ie. filtering, amplification, isolation, etc.), which may be necessary to increase the accuracy of your measurements.

Table 4. Recommended Accessories

## Ordering Information

NI PXI-6071E	777676-01
NI PCI-6071E	777515-01
NI PXI-6070E	777060-01
NI PCI-6070E	777305-01
NI DAQPad-6070E for FireWire	(See page 207)
NI DAQCard-6062E	(See page 207)
NI PXI-6052E	777962-01
NI PCI-6052E	777745-01
NI DAQPad-6052E for FireWire	(See page 207)
NI PXI-6040E	777484-01
NI PCI-6040E	777383-01
NI PCI-6033E	777516-01
NI PCI-6032E	777422-01
NI PXI-6031E	777636-01
NI PCI-6031E	777514-01
NI PXI-6030E	777555-01
NI PCI-6030E	777384-01
NI DAQPad-6020E for USB	(See page 207)

Includes NI-DAQ driver software and calibration certificate.

For more information on warranty and value-added services, see page 20.

## BUY ONLINE!

Visit [ni.com/dataacquisition](http://ni.com/dataacquisition)

# Multifunction DAQ Overview

Multifunction DAQ Overview

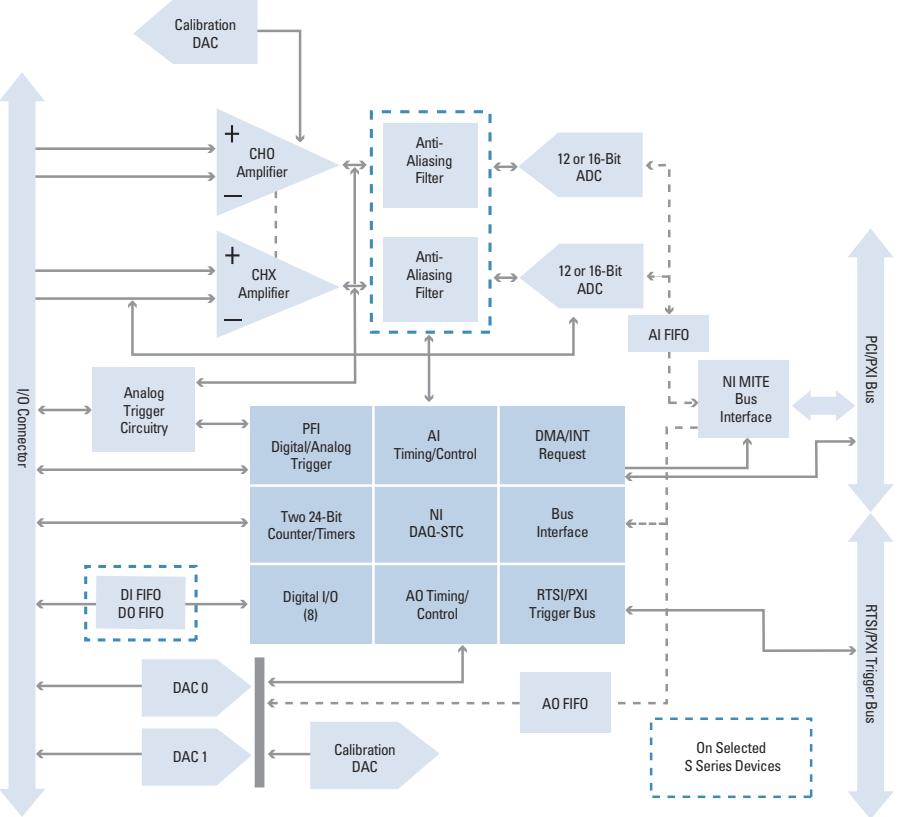


Figure 1. S Series Hardware Block Diagram

Data Acquisition and Signal Conditioning

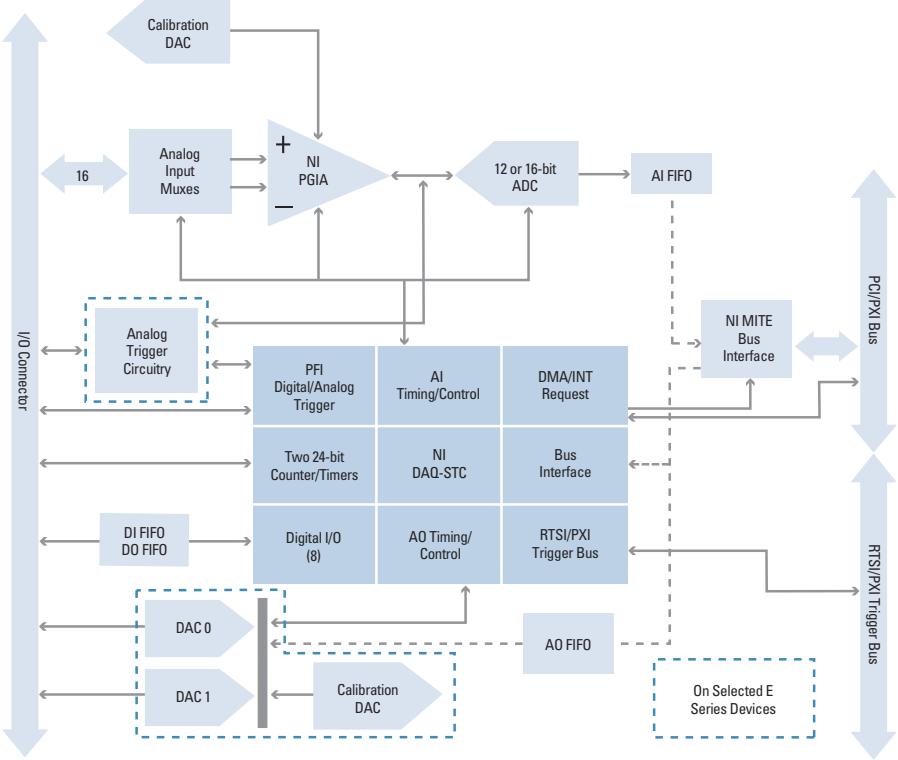


Figure 2. E Series Hardware Block Diagram

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 6062E, NI 6040E, NI 602xE

These specifications are typical for 25 °C unless otherwise noted.

### Analog Input

Accuracy specifications ..... See page 228.

### Input Characteristics

Number of Channels	
6070E	16 single-ended or 8 differential (software selectable per channel)
6062E	
6040E	
602xE	
6071E	64 single-ended or 32 differential (software selectable per channel)

Resolution..... 12 bits, 1 in 4,096

### Maximum Sampling Rate

607xE	1.25 MS/s
6062E	500 KS/s
6040E	500 kS/s single-channel scanning 250 kS/s multichannel scanning
6023E	
6024E	
6025E	
6020E	200 KS/s 100 kS/s

### Input Signal Ranges

Device	Range (Software Selectable)	Bipolar Input Range	Unipolar Input Range
607xE	20 V	±10 V	–
6062E	10 V	±5 V	0 to 10 V
6040E	5 V	±2.5 V	0 to 5 V
6020E	2 V	±1 V	0 to 2 V
	1 V	±500 mV	0 to 1 V
	500 mV	±250 mV	0 to 500 mV
	200 mV	±100 mV	0 to 200 mV
	100 mV	±50 mV	0 to 100 mV
6023E	20 V	±10 V	–
6024E	10 V	±5 V	–
6025E	1 V	±500 mV	–
	100 mV	±50 mV	–

Input coupling..... DC

Maximum working voltage  
(signal + common mode) ..... Input should remain within ±11 V of ground

Overvoltage Protection		
Device	Powered On	Powered Off
607xE	±25 V	±15 V
6062E		
6040E		
6023E	±40 V	±25 V
6024E		
6025E		
6020E	±35 V	±25 V

Inputs Protected	
6070E	AI <0..15>, AI SENSE
6062E, 6040E	
602xE	
6071E	AI <0..63>, AI SENSE, AI SENSE2

FIFO Buffer Size	
DAQCard-6062E	8,192 samples
DAQPad-6020E	4,096 samples
DAQPad-6070E	2,048 samples
DAQCard-6024E	
PCI/PXI-6070E	
6071E, 6040E	512 samples
PCI-6023E, NI 6025E, PCI-6024E	

### Data Transfers

PCI, PXI, DAQPad for FireWire	DMA, interrupts, programmed I/O
DAQCard, DAQPad for USB	Interrupts, programmed I/O
DMA modes	
PCI, PXI, DAQPad for FireWire	
Configuration memory size	

### Transfer Characteristics

Relative Accuracy		
Device	Typical Dithered	Maximum Undithered
607xE	±0.5 LSB	±1.5 LSB
6062E		
6040E		
6023E		
6024E		
6025E		
6020E	±0.2 LSB	±1.5 LSB

### DNL

Device	Typical	Maximum
607xE	±0.5 LSB	±1.0 LSB
6040E		
6023E		
PCI-6024E		
6025E		
6020E	±0.2 LSB	±1.0 LSB
6062E	±0.75 LSB	-0.9, +1.5 LSB
DAQCard-6024E		

No missing codes..... 12 bits, guaranteed

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### Amplifier Characteristics

Input Impedance			
Device	Normal Powered On	Powered Off	Overload
6070E	100 GΩ in parallel with 100 pF	820 Ω	820 Ω
6062E			
6040E			
PCI-6071E			
PXI-6071E			
6023E, 6024E,	100 GΩ in parallel with 100 pF	4.7 kΩ	4.7 kΩ
6025E			
6020E	100 GΩ in parallel with 50 pF	3 kΩ	3 kΩ

Input bias current ..... ±200 pA

Input offset current ..... ±100 pA

### CMRR, DC to 60 Hz

Device	Range	CMRR (dB)
607xE	20 V	95
	10 V	100
	100 mV to 5 V	106
6040E	10 to 20 V	85
	5 V	95
6062E	100 mV to 2 V	100
	10 to 20 V	85
6023E	100 mV to 1 V	90
6024E	100 mV to 20 V	90
6025E		
6020E	100 mV to 20 V	90

### Dynamic Characteristics

#### Bandwidth

Device	Small Signal (-3 dB)	Large Signal (1% THD)
607xE	1.6 MHz	1 MHz
6062E	1.3 MHz	250 kHz
6040E	600 kHz	350 kHz
6023E	500 kHz	225 kHz
PCI-6024E		
6025E		
DAQCard-6024E	500 kHz	265 kHz
DAQPad-6020E	150 kHz	200 kHz

### Settling Time to Full-Scale Step

Device	Range	Accuracy		
		±0.012% (±0.5 LSB)	±0.024% (±1 LSB)	±0.098% (±4 LSB)
6070E	20 V	2 µs typical 3 µs maximum	1.5 µs typical 2 µs maximum	1.5 µs typical 2 µs maximum
	10 V	2 µs typical 3 µs maximum	1.5 µs typical 2 µs maximum	1.3 µs typical 1.5 µs maximum
	200 mV to 5 V	2 µs typical	1.5 µs typical	0.9 µs typical
	100 mV	3 µs maximum	2 µs maximum	1 µs maximum
		2 µs typical	1.5 µs typical	1 µs typical
		3 µs maximum	2 µs maximum	1.5 µs maximum
	20 V	3 µs typical	1.9 µs typical	1.9 µs typical
	10 V	5 µs max	2.5 µs maximum	2 µs maximum
	200 mV to 5 V	3 µs typical	1.9 µs typical	1.2 µs typical
6071E	100 mV	5 µs maximum	2.5 µs maximum	1.3 µs maximum
		3 µs typical	1.9 µs typical	1.2 µs typical
		5 µs maximum	2.5 µs maximum	1.5 µs maximum
	All	2.5 µs typical	2.5 µs typical	2 µs typical
	All	4 µs maximum	3 µs maximum	2.5 µs maximum
	All	4 µs typical	4 µs maximum	4 µs maximum
	All	8 µs maximum		
	All	5 µs typical	5 µs maximum	5 µs maximum
	All			
	All	10 µs maximum	10 µs maximum	10 µs maximum
6062E				

### System Noise (LSB<sub>rms</sub>, Not Including Quantization)

Device	Range	Dither Off	Dither On
6070E	1 to 20 V	0.25	0.5
	500 mV	0.4	0.6
	200 mV	0.5	0.7
	100 mV	0.8	0.9
6062E	1 to 20 V	0.25	0.6
	500 mV	0.4	0.75
	200 mV	0.5	0.8
	100 mV	0.8	1.0
6040E	1 to 20 V	0.2	0.5
	500 mV	0.25	0.5
	200 mV	0.5	0.7
	100 mV	0.9	1.0
6023E	1 to 20 V	0.1	0.6
	100 mV	0.7	0.8
PCI-6024E, 6025E	10 to 20 V	0.1	0.65
	1 V	0.45	0.65
	100 mV	0.70	0.90
DAQCard-6024E	1 to 20 V	0.07	0.5
	500 mV	0.12	0.5
	200 mV	0.25	0.6
	100 mV	0.5	0.7
6020E	1 to 20 V	0.07	0.5
	500 mV	0.12	0.5
	200 mV	0.25	0.6
	100 mV	0.5	0.7

### Crosstalk, DC to 100 kHz

Device	Adjacent Channels	All Other Channels
607xE, 6062E, 6040E	-75 dB	-90 dB
602xE	-60 dB	-80 dB

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### Analog Output

#### Output Characteristics

Number of Channels	
607xE	2 voltage outputs
6062E	
6040E	
6020E	
6024E	
6025E	
6023E	None

Resolution..... 12 bits, 1 in 4,096

Maximum update rate

#### Waveform Generation

Device	FIFO Mode		Non-FIFO Mode	
	Internally Timed	Externally Timed	1 Channel	2 Channels
607xE	1 MS/s	950 kS/s	800 kS/s, system dependent	400 kS/s, system dependent
6040E				
6062E	850 kS/s	850 kS/s	800 kS/s, system dependent	400 kS/s, system dependent
6023E	N/A	N/A	10 kS/s with DMA	10 kS/s with DMA
PCI-6024E			1 kS/s with interrupts	1 kS/s with interrupts
6025E			system dependent	system dependent
DAQCard-6024E	N/A	N/A	1 kS/s with interrupts	1 kS/s with interrupts
DAQPad-6020E	N/A	N/A	system dependent	system dependent
			20 S/s, system dependent	20 S/s, system dependent

#### FIFO Buffer Size

607xE, 6062E	2,048 samples
6040E	512 samples
602xE	None

#### Data transfers

PCI, PXI, DAQPad for IEEE 1394 ..... DMA, interrupts, programmed I/O  
DAQCard, DAQPad for USB ..... Interrupts, programmed I/O

#### DMA modes

PCI, PXI, DAQPad ..... Scatter-gather (single transfer, demand transfer)

### Transfer Characteristics

#### Relative accuracy

After calibration  
6062E, DAQCard-6024E .....  $\pm 0.5$  LSB typical,  $\pm 1.0$  LSB maximum  
All others .....  $\pm 0.3$  LSB typical,  $\pm 0.5$  LSB maximum

Before calibration .....  $\pm 4$  LSB maximum

#### DNL

After calibration  
6062E, DAQCard-6024E .....  $\pm 0.5$  LSB typical,  $\pm 1.0$  LSB maximum  
All others .....  $\pm 0.3$  LSB typical,  $\pm 1.0$  LSB maximum

Before calibration .....  $\pm 3$  LSB maximum

#### Monotonicity

12 bits, guaranteed after calibration

#### Gain error (relative to external reference)

6062E, 6020E .....  $\pm 0.5\%$  of output maximum, not adjustable  
607xE, 6040E ..... 0 to  $0.67\%$  of output maximum, not adjustable

### Voltage Output

Output coupling..... DC

Output impedance.....  $0.1 \Omega$  maximum

#### Ranges

607xE, 6040E, 6020E	$\pm 10$ V, 0 to $10$ V, $\pm$ EXT REF, 0 to EXT REF; software selectable
6062E	$\pm 10$ V, $\pm$ EXT REF, software selectable
6024E, 6025E	$\pm 10$ V

Current drive.....  $\pm 5$  mA maximum

Protection ..... Short-circuit to ground

Power-on state ..... 0 V ( $\pm 200$  mV)

### External Reference Input

Range.....	11 V
Overshoot protection	
607xE, 6062E, 6040E .....	$\pm 25$ V powered on, $\pm 15$ V powered off
6020E .....	$\pm 35$ V powered on, $\pm 25$ V powered off
Input impedance .....	$10 \text{ k}\Omega$
Bandwidth (-3 dB)	
607xE, 6040E .....	1 MHz
6062E .....	50 kHz
6020E .....	300 kHz

### Dynamic Characteristics

Device	Settling Time for Full-Scale Step		Slew Rate
	607xE	6062E	
6040E	3 $\mu$ s to $\pm 0.5$ LSB accuracy		20 V/ $\mu$ s
6020E		10 $\mu$ s to $\pm 0.5$ LSB accuracy	10 V/ $\mu$ s

Device	Reglitching Disabled		Reglitching Enabled
	607xE, 6040E	PCI-6024E	
6025E	$\pm 20$ mV	$\pm 4$ mV	N/A
DAQCard-6024E	$\pm 42$ mV	N/A	N/A
6020E	$\pm 13$ mV	$\pm 100$ mV	N/A
6062E	$\pm 80$ mV	$\pm 30$ mV	

### Glitch Duration (At Mid-Scale Transition)

607xE	1.5 $\mu$ s
6040E	
6024E	2 $\mu$ s
6025E	
6020E	3 $\mu$ s
6062E	

Noise ..... 200  $\mu$ V<sub>rms</sub>, DC to 1 MHz

Glitch energy magnitude (at mid-scale transition)

### Stability

Gain temperature coefficient (except 6024E, 6025E)

External reference .....  $\pm 25$  ppm/ $^{\circ}$ C

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### Digital I/O

#### Number of Channels

6025E	32 input/output
All others	8 input/output

Compatibility ..... 5 V TTL  
 Power-on state ..... Input; (high-impedance)

Digital logic levels  
 $P_0 < 0.7$

Level	Minimum (V)	Maximum (V)
Input low voltage	0	0.8
Input high voltage	2.0	5.0
Output low voltage ( $I_{out} = 24$ mA)	–	0.4
Output high voltage ( $I_{out} = -13$ mA)	4.35	–

$P_1 < 0.7$ ,  $P_2 < 0.7$ ,  $P_3 < 0.7$

Level	Minimum (V)	Maximum (V)
Input low voltage	0	0.8
Input high voltage	2.2	5.0
Output low voltage ( $I_{out} = 2.5$ mA)	–	0.4
Output high voltage ( $I_{out} = -2.5$ mA)	3.7	–

#### Data Transfers

6025E	Interrupts, programmed I/O
All others	Programmed I/O

Transfer rate (1 word = 8 bits)

Maximum with NI-DAQ, system dependent

#### Transfer Rate

DAQPad-6070E	5 kwords/s
All others	50 kwords/s

Constant sustainable rate ..... 1 to 10 kwords/s, system dependent

### Timing I/O

Number of channels

Up/down counter/timers ..... 2  
 Frequency scaler ..... 1

Resolution

Up/down counter/timers ..... 24 bits  
 Frequency scaler ..... 4 bits

Compatibility ..... 5 V/TTL

Base clocks available

Up/down counter/timers ..... 20 MHz and 100 kHz  
 Frequency scaler ..... 10 MHz and 100 kHz

Base clock accuracy .....  $\pm 0.01\%$

Maximum source frequency

Up/down counter/timers ..... 20 MHz  
 Minimum source pulse duration ..... 10 ns, edge-detect mode  
 Minimum gate pulse duration ..... 10 ns, edge-detect mode

Data transfers ..... DMA\*, interrupts, programmed I/O

\*Except DAQCard and USB DAQPad

### Triggers

#### Analog Triggers

##### Number of Triggers

607xE	1
6062E	
6040E	
602xE	None

##### Purpose

Analog input ..... Start and stop trigger, gate, clock  
 Analog output ..... Start trigger, gate, clock  
 General-purpose counter/timers ..... Source, gate

Source ..... All analog input channels, PFI 0/AI START TRIG

##### Level

Internal source, AI<0..15/63> ..... ±Full-scale

External source, PFI 0/AI START TRIG ..... ±10 V

Slope ..... Positive or negative; software selectable

Resolution ..... 8 bits, 1 in 256

Bandwidth (-3 dB)

Device	Internal Source	External Source
607xE	2 MHz	7 MHz
6062E	500 kHz	2.5 MHz
6040E	650 kHz	3 MHz

Hysteresis ..... Programmable

#### Digital Triggers (All Devices)

##### Purpose

Analog input ..... Start and stop trigger, gate, clock

Analog output ..... Start trigger, gate, clock

General-purpose counter/timers ..... Source, gate

Source ..... PFI <0..8>, RTSI <0..6>

Compatibility ..... 5 V/TTL

Response ..... Rising or falling edge

Pulse width ..... 10 ns minimum

#### External Input For Digital Or Analog Trigger (PFI0/TRIG1)

##### Impedance

6062E ..... 12 kΩ

607xE, 6040E ..... 10 kΩ

Coupling ..... DC

##### Protection

Digital trigger ..... -0.5 to  $V_{cc}$  + 0.5 V

### Calibration

Recommended warm-up time ..... 15 minutes; 30 minutes for DAQCard and DAQPad

Calibration interval ..... 1 year

Onboard calibration reference

DC level ..... 5.000 V ( $\pm 3.5$  mV) over full operating temperature,  
 actual value stored in EEPROM

Temperature coefficient .....  $\pm 5$  ppm/°C maximum

Long-term stability .....  $\pm 15$  ppm/ $\sqrt{1000}$  h

# 12-Bit E Series Multifunction DAQ Specifications

## Specifications – NI 607xE, NI 606xE, NI 6040E, NI 602xE (continued)

### RTSI Bus (PCI and FireWire only)

Trigger lines<sup>1</sup>

PCI .....	7
FireWire (DAQPad) .....	4

### PXI Trigger Bus (PXI only)

Trigger lines.....	6
Star trigger .....	1

### Bus Interface

PCI, PXI, FireWire (DAQPad).....	Master, slave
USB (DAQPad).....	Slave
PCMCIA (DAQCard) .....	Slave

### Power Requirements<sup>2</sup>

Device	+5 VDC ( $\pm 5\%$ )*	Power Available at I/O Connector
PCI-607xE, PXI-607xE	1.1 A	+4.65 to +5.25 VDC, 1 A
6040E	1.0 A	+4.65 to +5.25 VDC, 1 A
DAQCard-6062E	340 mA typical 750 mA maximum	+4.65 to +5.25 VDC, 250 mA
DAQCard-6024E	270 mA typical 750 mA maximum	+4.65 to +5.25 VDC, 250 mA
6023E, 6025E, PCI-6024E	0.7 A	+4.65 to +5.25 VDC, 1 A
Device	Power*	Power Available at I/O Connector
DAQPad-6020E	15 W, +9 to +30 VDC	+4.65 to +5.25 VDC, 1 A
DAQPad-6070E	17 W, +9 to +25 VDC	+4.65 to +5.25 VDC, 1 A

\*Excludes power consumed through I/O connector

Discharge time with BP-1 battery pack

FireWire (DAQPad) .....	2.5 hours, typical
USB (DAQPad).....	3 hours, typical

### Physical<sup>1</sup>

#### Dimensions (Not Including Connectors)

PCI .....	17.5 by 10.7 cm (6.9 by 4.2 in.)
PXI .....	16.0 by 10.0 cm (6.3 by 3.9 in.)

DAQPad (30 cm enclosure).....	25.4 by 30.7 by 4.3 cm (10 by 12.1 by 1.7 in.)
DAQPad (15 cm enclosure).....	14.6 by 21.3 by 3.8 cm (5.8 by 8.4 by 1.5 in.)
DAQCard .....	Type II PC Card

I/O Connector	
6070E	68-pin male 0.050 D-type
6040E	
6020E	
6023E	
PCI-6024E	
DAQCard-6062E, DAQCard-6024E	68-pin female VHDCI
6071E	100-pin female 0.050 D-type
6025E	

### Environment

Operating temperature.....	0 to 55 °C
	0 to 40 °C for DAQCard-6062E and DAQCard-6024E with a maximum internal temperature of 70 °C as measured by onboard temperature sensor; case temperature should not exceed 55 °C for any DAQCard
Storage temperature .....	-20 to 70 °C
Relative humidity .....	10 to 90%, noncondensing

### Certifications and Compliances

#### CE Mark Compliance

<sup>1</sup>Refer to RTSI specifications for available RTSI trigger lines. RTSI not available on DAQCards.<sup>2</sup>See page 134 for RT Series devices, power requirements and physical parameters.

# Multifunction DAQ Cable and Accessory Selection Guides

## NI Cable Design Advantages

The SH68-68-EP cable is the most commonly used E Series and S Series cable. The cable is designed to work specifically with the NI Multifunction DAQ devices to preserve signal integrity through these technologies:

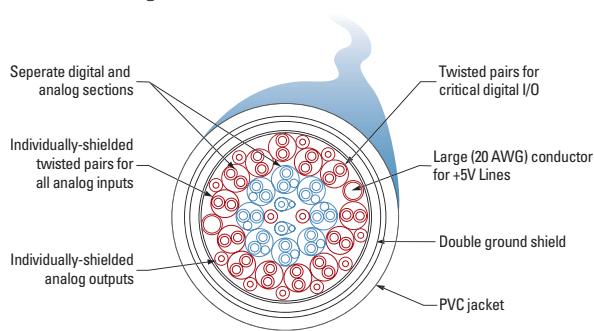


Figure 1. SH68-68-EP Cable

A variety of cabling and accessory options are available for your needs. Use the following tables to choose the most appropriate cables and accessories. To determine which Multifunction DAQ device best fits your needs, please see page 189.



Figure 2. NI offers a wide variety of cable and accessory options, such as the SH68-68-EP cable and the BNC-2110 terminal block.

Platform	Shielding	Connect to ...	Cable	Adapter	Accessory
<b>PCI/PXI/USB/FireWire</b>					
	Shielded	SCC portable signal conditioning per channel	SH68-68-EP	—	SC-2345 and modules, page 251
	Shielded	SCXI high-performance signal conditioning	SCXI-1349	—	SCXI Chassis and Modules, page 270
	Shielded	Screw terminals <sup>1</sup>	SH68-68-EP or SH68-68R1-EP	—	SCB-68
	Shielded	BNC terminal block	SH68-68-EP	—	BNC-2110, BNC-2120, BNC-2090
	Shielded	50-pin connector	SH6850	—	CB50, custom or 3rd party
	Shielded	Configurable connectivity box	SH68-68-EP	—	CA-1000, page 351
	Unshielded	Screw terminals <sup>1</sup>	R6868	—	TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory
	Unshielded	50-pin connector	R6850	—	CB50, custom or 3rd party
<b>PXI only</b>					
	Shielded	Front-mounted screw terminals	N/A	—	TB-2705
<b>PCMCIA</b>					
	Shielded	Screw terminals <sup>1</sup>	SHC68-68-EP or SHC68U-68-EP <sup>2</sup>	—	SCB-68, CA-1000
	Shielded	50-pin connector	SHC68-68-EP or SHC68U-68-EP <sup>2</sup>	68M-50F MIO	CB50, custom or 3rd party
	Unshielded	Screw terminals <sup>1</sup>	RC68-68		TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory
	Unshielded	50-pin connector	RC68-68	68M-50F MIO	CB50, custom or 3rd party

<sup>1</sup>Unshielded cables can connect to shielded accessories and vice-versa. <sup>2</sup>In adjacent PCMCIA slots, both cables types are required because the same cable would cause mechanical hindrance.

Table 1. Cable Connection Specifications for 16-Channel E Series Devices and Basic Multifunction DAQ (except NI 6025E, which is on the next page)

# Multifunction DAQ Cable and Accessory Selection Guides

## Cables and Accessories Selection Guides

## Data Acquisition and Signal Conditioning

AI 0-	34	68	AI 0+
AI 1+	33	67	AI 0 GND
AI 1 GND	32	66	AI 1-
AI 2-	31	65	AI 2+
AI 3+	30	64	AI 2 GND
AI 3 GND	29	63	AI 3-
NC	28	62	NC
NC	27	61	NC
NC	26	60	NC
NC	25	59	NC
NC	24	58	NC
NC	23	57	NC
AO 0	22	56	NC
AO 0	21	55	AO GND
EXT REF	20	54	AO GND
P0.4	19	53	D GND
D GND	18	52	P0.0
P0.1	17	51	P0.5
P0.6	16	50	D GND
D GND	15	49	P0.2
+5 V	14	48	P0.7
D GND	13	47	P0.3
D GND	12	46	AI HOLD
PFI 0/AI START	11	45	EXT STROBE
PFI 1/REF TRIG	10	44	D GND
D GND	9	43	PFI 2/AI CONV
+5 V	8	42	PFI 3/CTR 1 SRC
D GND	7	41	PFI 4/CTRI GATE
PFI 5/AO SAMP	6	40	CTR 1 OUT
PFI 6/AO START	5	39	D GND
D GND	4	38	PFI 7/AI SAMP
PFI 9/CTR 0 GATE	3	37	PFI 8/CTR 0 SRC
CTR 0 OUT	2	36	D GND
F OUT	1	35	D GND

Figure 2. S Series Devices Connector

<sup>1</sup>No connects for boards that do not support AO or use an external reference with the SH1006868 cable.

AI GND 1 51 AI 16  
AI GND 2 52 AI 24  
AI 0 3 53 AI 17  
AI 8 4 54 AI 25  
AI 1 5 55 AI 18  
AI 9 6 56 AI 26  
AI 2 7 57 AI 19  
AI 10 8 58 AI 27  
AI 3 9 59 AI 20  
AI 11 10 60 AI 28  
AI 4 11 61 AI 21  
AI 12 12 62 AI 29  
AI 5 13 63 AI 22  
AI 13 14 64 AI 30  
AI 6 15 65 AI 23  
AI 14 16 66 AI 31  
AI 7 17 67 AI 32  
AI 15 18 68 AI 40  
AI SENSE 19 69 AI 33  
AO 0 20 70 AI 41  
AO 1 21 71 AI 34  
EXT REF 22 72 AI 42  
AO GND 23 73 AI 35  
D GND 24 74 AI 43  
P0.0 25 75 AI SENSE 2  
P0.4 26 76 AI GND  
P0.1 27 77 AI 36  
P0.5 28 78 AI 44  
P0.2 29 79 AI 37  
P0.6 30 80 AI 45  
P0.3 31 81 AI 38  
P0.7 32 82 AI 46  
D GND 33 83 AI 39  
+5 V 34 84 AI 47  
+5 V 35 85 AI 48  
AI HOLD 36 86 AI 56  
EXT STROBE 37 87 AI 49  
PFI 0/AI START 38 88 AI 57  
PFI 1/REF TRIG 39 89 AI 50  
PFI 2/AI CONV 40 90 AI 58  
PFI 3/CTR 1 SRC 41 91 AI 51  
PFI 4/CTR 1 GATE 42 92 AI 59  
CTR 1 OUT 43 93 AI 52  
PFI 5/AO SAMP 44 94 AI 60  
PFI 6/AO START 45 95 AI 53  
PFI 7/AI SAMP 46 96 AI 61  
PFI 8/CTR 0 SRC 47 97 AI 54  
PFI 9/CTR 0 GATE 48 98 AI 62  
CTR 0 OUT 49 99 AI 55  
F OUT 50 100 AI 63

Figure 3. I/O Connector for 16-Channel E Series and Basic Multifunction DAQ Devices, except NI 6025E

AI GND 1 51 P2.7
AI GND 2 52 GND
AI 0 3 53 P2.6
AI 8 4 54 P2.5
AI 1 5 55 P2.5
AI 9 6 56 P2.5
AI 2 7 57 P2.4
AI 10 8 58 P2.4
AI 3 9 59 P2.3
AI 11 10 60 P2.3
AI 4 11 61 P2.2
AI 12 12 62 GND
AI 5 13 63 P2.1
AI 13 14 64 GND
AI 6 15 65 P2.0
AI 14 16 66 GND
AI 7 17 67 P1.7
AI 15 18 68 GND
AI SENSE 19 69 P1.6
AO 0 20 70 GND
AO 1 21 71 P1.5
NC 22 72 GND
AO GND 23 73 P1.4
D GND 24 74 GND
P0.0 25 75 P1.3
P0.4 26 76 GND
P0.1 27 77 P1.2
P0.5 28 78 GND
P0.2 29 79 P1.1
P0.6 30 80 GND
P0.3 31 81 P1.0
P0.7 32 82 GND
D GND 33 83 P0.7
+5 V 34 84 GND
+5 V 35 85 P0.6
AI HOLD 36 86 GND
EXT STROBE 37 87 P0.5
PFI 0/AI START 38 88 GND
PFI 1/REF TRIG 39 89 P0.4
PFI 2/AI CONV 40 90 GND
PFI 3/CTR 1 SRC 41 91 P0.3
PFI 4/CTR 1 GATE 42 92 GND
CTR 1 OUT 43 93 P0.2
PFI 5/AO SAMP 44 94 GND
PFI 6/AO START 45 95 P0.1
PFI 7/AI SAMP 46 96 GND
PFI 8/CTR 0 SRC 47 97 P0.0
PFI 9/CTR 0 GATE 48 98 GND
CTR 0 OUT 49 99 GND
F OUT 50 100 +5 V

Figure 4. I/O Connector for 64-Channel E Series Devices

Figure 5. I/O Connector for the NI 6025E Device

## E Series Devices (NI 6031E, NI 6033E, NI 6071E, NI 6025E)

Platform	Shielding	Connect to ...	Cable	Cable Leg	Adapter	Accessory
PCI, PXI	Shielded	Screw terminals	SH100100	—	—	SCB-100
	Shielded	Screw terminals	SH1006868	MIO:	—	SCB-68
	Shielded		SH1006868	Extended:	—	SCB-68
	Shielded	Screw terminals <sup>1</sup>	SH1006868	MIO:	—	TBX-68, CB-68LP, CB-68LPR, DAQ signal accessory
	Shielded	Screw terminals <sup>1</sup>	SH1006868	Extended:	—	TBX-68, CB-68LP, CB-68LPR
	Shielded	BNC terminal block	SH1006868	MIO:	—	BNC-2110, BNC-2120, BNC-2090
	Shielded		SH1006868	Extended:	—	BNC-2115
	Shielded	50-pin connectors	SH1006868	MIO:	68M-50F MIO	Custom or 3rd party
	Shielded		SH1006868	Extended:	68M-50F Extended	Custom or 3rd party
	Unshielded	50-pin connector	R1005050	MIO:	—	Custom or 3rd party
	Unshielded		R1005050	Extended:	—	Custom or 3rd party

<sup>1</sup>Shielded cable with unshielded accessories

Table 2. Cable Connection Specifications for 64-Channel E Series Devices and the NI 6025E