

### 3 V, SUPER MINIMOLD SILICON MMIC MEDIUM OUTPUT POWER AMPLIFIER FOR MOBILE COMMUNICATIONS

#### DESCRIPTION

The  $\mu$ PC2762TB,  $\mu$ PC2763TB and  $\mu$ PC2771TB are silicon monolithic integrated circuits designed as amplifier for mobile communications. These ICs operate at 3 V. The medium output power is suitable for RF-TX of mobile communications system.

These IC is manufactured using NEC's 20 GHz fr NESAT™III silicon bipolar process. This process uses direct silicon nitride passivation film and gold electrodes. These materials can protect the chip surface from pollution and prevent corrosion/migration. Thus, this IC has excellent performance, uniformity and reliability.

#### FEATURES

- Supply voltage :  $V_{CC} = 2.7$  to  $3.3$  V
- Medium output power :  $\mu$ PC2762TB;  $P_{O(1\text{ dB})} = +8.0$  dBm TYP. @  $f = 0.9$  GHz  
 $\mu$ PC2763TB;  $P_{O(1\text{ dB})} = +9.5$  dBm TYP. @  $f = 0.9$  GHz  
 $\mu$ PC2771TB;  $P_{O(1\text{ dB})} = +11.5$  dBm TYP. @  $f = 0.9$  GHz
- Power gain :  $\mu$ PC2762TB;  $G_P = 13$  dB TYP. @  $f = 0.9$  GHz  
 $\mu$ PC2763TB;  $G_P = 20$  dB TYP. @  $f = 0.9$  GHz  
 $\mu$ PC2771TB;  $G_P = 21$  dB TYP. @  $f = 0.9$  GHz
- ★ Upper limit operating frequency :  $\mu$ PC2762TB;  $f_u = 2.9$  GHz TYP. @ 3dB Bandwidth  
 $\mu$ PC2763TB;  $f_u = 2.7$  GHz TYP. @ 3dB Bandwidth  
 $\mu$ PC2771TB;  $f_u = 2.2$  GHz TYP. @ 3dB Bandwidth
- High-density surface mounting : 6-pin super minimold package ( $2.0 \times 1.25 \times 0.9$  mm)

#### APPLICATIONS

- Buffer amplifiers for mobile telephones:  $\mu$ PC2762TB,  $\mu$ PC2763TB
- PA driver for PDC800M :  $\mu$ PC2771TB

#### ORDERING INFORMATION


| Part Number       | Package              | Marking | Supplying Form  |
|-------------------|----------------------|---------|---|
| $\mu$ PC2762TB-E3 | 6-pin super minimold | C1Z     | Embossed tape 8 mm wide.<br>1, 2, 3 pins face the perforation side of the tape.<br>Qty 3 kpcs/reel. |
| $\mu$ PC2763TB-E3 |                      | C2A     |   |
| $\mu$ PC2771TB-E3 |                      | C2H     |   |

**Remark** To order evaluation samples, please contact your local NEC sales office.  
Part number for sample order:  $\mu$ PC2762TB,  $\mu$ PB2763TB,  $\mu$ PC2771TB

**Caution Electro-static sensitive devices**

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.  
Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

**PIN CONNECTIONS**

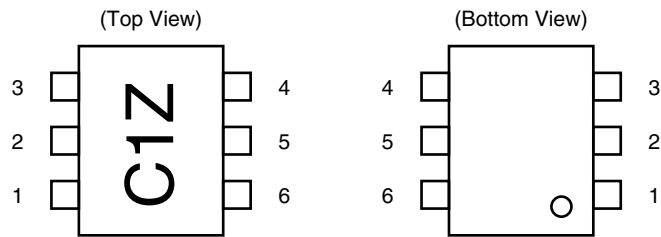

Marking is an example of  $\mu$ PC2762TB

| Pin No. | Pin Name        |
|---------|-----------------|
| 1       | INPUT           |
| 2       | GND             |
| 3       | GND             |
| 4       | OUTPUT          |
| 5       | GND             |
| 6       | V <sub>CC</sub> |

★ **PRODUCT LINE-UP** (T<sub>A</sub> = +25°C, V<sub>CC</sub> = V<sub>out</sub> = 3.0 V, Z<sub>s</sub> = Z<sub>L</sub> = 50 Ω)


| Part No.       | f <sub>u</sub><br>(GHz) | P <sub>O</sub> (1 dB)<br>(dBm)                                 | G <sub>p</sub><br>(dB)   | I <sub>CC</sub><br>(mA) | Package              | Marking |
|----------------|-------------------------|--|--|-------------------------|----------------------|---------|
| $\mu$ PC2762T  | 2.9                     | +8.0 @ f = 0.9 GHz   | 13.0 @ f = 0.9 GHz   | 26.5                    | 6-pin minimold       | C1Z     |
| $\mu$ PC2762TB |                         | +7.0 @ f = 1.9 GHz   | 15.5 @ f = 1.9 GHz   |                         | 6-pin super minimold |         |
| $\mu$ PC2763T  | 2.7                     | +9.5 @ f = 0.9 GHz   | 20.0 @ f = 0.9 GHz   | 27.0                    | 6-pin minimold       | C2A     |
| $\mu$ PC2763TB |                         | +6.5 @ f = 1.9 GHz   | 21.0 @ f = 1.9 GHz   |                         | 6-pin super minimold |         |
| $\mu$ PC2771T  | 2.2                     | +11.5 @ f = 0.9 GHz  | 21.0 @ f = 0.9 GHz   | 36.0                    | 6-pin minimold       | C2H     |
| $\mu$ PC2771TB |                         | +9.5 @ f = 1.5 GHz   | 21.0 @ f = 1.5 GHz   |                         | 6-pin super minimold |         |
| $\mu$ PC8181TB | 4.0                     | +8.0 @ f = 0.9 GHz<br>+7.0 @ f = 1.9 GHz<br>+7.0 @ f = 2.4 GHz | 19.0 @ f = 0.9 GHz<br>21.0 @ f = 1.9 GHz<br>22.0 @ f = 2.4 GHz | 23.0                    | 6-pin super minimold | C3E     |
| $\mu$ PC8182TB | 2.9                     | +9.5 @ f = 0.9 GHz<br>+9.0 @ f = 1.9 GHz<br>+8.0 @ f = 2.4 GHz | 21.5 @ f = 0.9 GHz<br>20.5 @ f = 1.9 GHz<br>20.5 @ f = 2.4 GHz | 30.0                    | 6-pin super minimold | C3F     |

**Remark** Typical performance. Please refer to ELECTRICAL CHARACTERISTICS in detail.

**Caution** The package size distinguishes between minimold and super minimold.

SYSTEM APPLICATION EXAMPLE


Digital cellular telephone

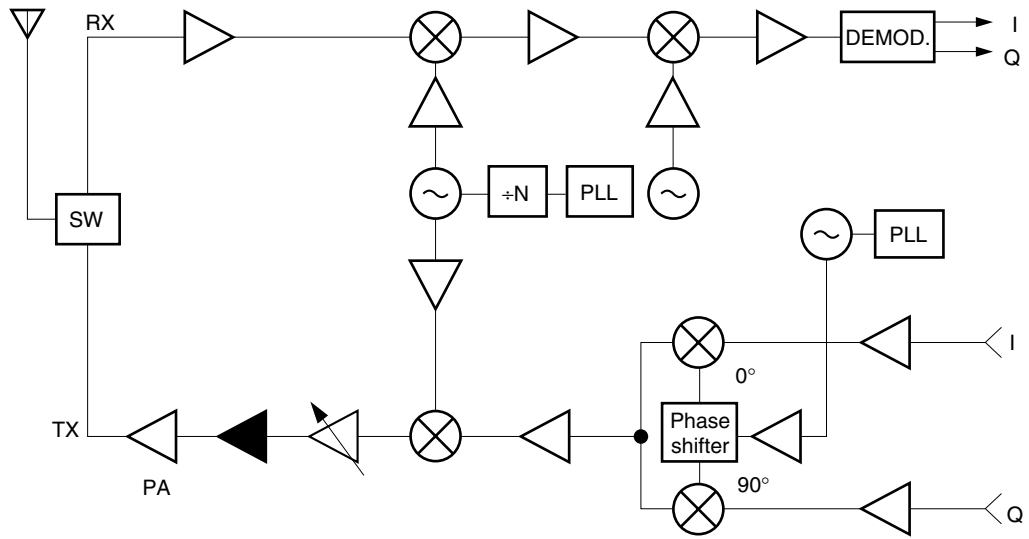

◀:  $\mu$ PC2762TB, 2763TB, 2771TB applicable

**Caution** The insertion point is different due to the specifications of conjunct devices.

**PIN EXPLANATION**
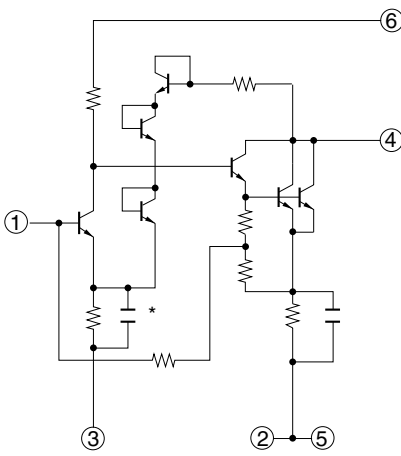
| Pin No.     | Pin Name | Applied Voltage (V)                                   | Pin Voltage (V) <sup>Note</sup>        | Function and Applications   | Internal Equivalent Circuit   |
|-------------|----------|---|--|---|---|
| 1           | INPUT    | –   | 1.31<br>-----<br>1.01<br>-----<br>0.97 | Signal input pin. A internal matching circuit, configured with resistors, enables 50 $\Omega$ connection over a wide band. A multi-feedback circuit is designed to cancel the deviations of $h_{FE}$ and resistance. This pin must be coupled to signal source with capacitor for DC cut. |  <p>* <math>\mu</math>PC2762TB does not have this capacitance.</p> |
| 2<br>3<br>5 | GND      | 0   | –                                      | Ground pin. This pin should be connected to system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with wide ground pattern to decrease impedance difference.                            |   |
| 4           | OUTPUT   | Voltage as same as $V_{CC}$ through external inductor | –                                      | Signal output pin. The inductor must be attached between $V_{CC}$ and output pins to supply current to the internal output transistors.   |   |
| 6           | $V_{CC}$ | 2.7 to 3.3  | –                                      | Power supply pin, which biases the internal input transistor. This pin should be externally equipped with bypass capacitor to minimize its impedance.   |   |

**Note** Pin voltage is measured at  $V_{CC} = 3.0$  V. Above:  $\mu$ PC2762TB, Center:  $\mu$ PC2763TB, Below:  $\mu$ PC2771TB.

**ABSOLUTE MAXIMUM RATINGS**

| Parameter                     | Symbol           | Conditions   | Ratings                          |                | Unit |
|-------------------------------|------------------|--|----------------------------------|----------------|------|
|                               |                  |  | $\mu$ PC2762TB<br>$\mu$ PC2763TB | $\mu$ PC2771TB |      |
| Supply Voltage                | V <sub>CC</sub>  | T <sub>A</sub> = +25°C, pin 4 and pin 6  | 3.6                              |                | V    |
| Total Circuit Current         | I <sub>CC</sub>  | T <sub>A</sub> = +25°C   | 70                               | 77.7           | mA   |
| Power Dissipation             | P <sub>D</sub>   | Mounted on double copper clad<br>50 × 50 × 1.6 mm epoxy glass PWB,<br>T <sub>A</sub> = +85°C | 270                              |                | mW   |
| Operating Ambient Temperature | T <sub>A</sub>   |  | -40 to +85                       |                | °C   |
| Storage Temperature           | T <sub>stg</sub> |  | -55 to +150                      |                | °C   |
| Input Power                   | P <sub>in</sub>  | T <sub>A</sub> = +25°C   | +10                              | +13            | dBm  |

★

**RECOMMENDED OPERATING RANGE**

| Parameter           | Symbol           | MIN. | TYP. | MAX. | Unit | Remark   |
|---------------------|------------------|------|------|------|------|--|
| Supply Voltage      | V <sub>CC</sub>  | 2.7  | 3.0  | 3.3  | V    | Same voltage should be applied to pin 4 and pin 6. |
| Operating Frequency | f <sub>opt</sub> | 0.8  | –    | 1.9  | GHz  | Only for $\mu$ PC2771TB                            |

**ELECTRICAL CHARACTERISTICS**

(Unless otherwise specified,  $T_A = +25^\circ\text{C}$ ,  $V_{CC} = V_{out} = 3.0\text{ V}$ ,  $Z_s = Z_L = 50\ \Omega$ )

$\mu$ PC2762TB,  $\mu$ PC2763TB

| Parameter                          | Symbol               | Test Conditions                          | $\mu$ PC2762TB |              |            | $\mu$ PC2763TB |              |            | Unit |
|------------------------------------|----------------------|--|----------------|--------------|------------|----------------|--------------|------------|------|
|                                    |                      |  | MIN.           | TYP.         | MAX.       | MIN.           | TYP.         | MAX.       |      |
| Circuit Current                    | $I_{CC}$             | No signal                                | –              | 26.5         | 35.0       | –              | 27.0         | 35.0       | mA   |
| Power Gain                         | $G_P$                | f = 0.9 GHz<br>f = 1.9 GHz               | 11<br>11.5     | 13<br>15.5   | 16<br>17.5 | 18<br>18       | 20<br>21     | 23<br>24   | dB   |
| Noise Figure                       | NF                   | f = 0.9 GHz<br>f = 1.9 GHz               | –<br>–         | 6.5<br>7.0   | 8.0<br>9.0 | –<br>–         | 5.5<br>5.5   | 7.0<br>7.5 | dB   |
| Upper Limit Operating Frequency    | $f_u$                | 3 dB down below from gain at f = 0.1 GHz | 2.7            | 2.9          | –          | 2.3            | 2.7          | –          | GHz  |
| Isolation                          | ISL                  | f = 0.9 GHz<br>f = 1.9 GHz               | 22<br>20       | 27<br>25     | –<br>–     | 25<br>24       | 30<br>29     | –<br>–     | dB   |
| Input Return Loss                  | $RL_{in}$            | f = 0.9 GHz<br>f = 1.9 GHz               | 6.0<br>5.5     | 9.0<br>8.5   | –<br>–     | 8.0<br>8.0     | 11.0<br>11.0 | –<br>–     | dB   |
| Output Return Loss                 | $RL_{out}$           | f = 0.9 GHz<br>f = 1.9 GHz               | 8.0<br>9.0     | 11.0<br>12.0 | –<br>–     | 5.0<br>6.0     | 7.0<br>9.0   | –<br>–     | dB   |
| 1 dB Gain Compression Output Power | $P_{O(1\text{ dB})}$ | f = 0.9 GHz<br>f = 1.9 GHz               | +5.5<br>+4.5   | +8.0<br>+7.0 | –<br>–     | +7.0<br>+4.0   | +9.5<br>+6.5 | –<br>–     | dBm  |

$\mu$ PC2771TB

| Parameter                          | Symbol               | Test Conditions                          | $\mu$ PC2771TB |                |            | Unit |
|------------------------------------|----------------------|--|----------------|----------------|------------|------|
|                                    |                      |  | MIN.           | TYP.           | MAX.       |      |
| Circuit Current                    | $I_{CC}$             | No signal                                | –              | 36.0           | 45.0       | mA   |
| Power Gain                         | $G_P$                | f = 0.9 GHz<br>f = 1.5 GHz               | 19<br>18       | 21<br>21       | 24<br>24   | dB   |
| Noise Figure                       | NF                   | f = 0.9 GHz<br>f = 1.5 GHz               | –<br>–         | 6.0<br>6.0     | 7.5<br>7.5 | dB   |
| Upper Limit Operating Frequency    | $f_u$                | 3 dB down below from gain at f = 0.1 GHz | 1.8            | 2.2            | –          | GHz  |
| Isolation                          | ISL                  | f = 0.9 GHz<br>f = 1.5 GHz               | 25<br>25       | 30<br>30       | –<br>–     | dB   |
| Input Return Loss                  | $RL_{in}$            | f = 0.9 GHz<br>f = 1.5 GHz               | 10<br>10       | 14<br>14       | –<br>–     | dB   |
| Output Return Loss                 | $RL_{out}$           | f = 0.9 GHz<br>f = 1.5 GHz               | 6.5<br>5.5     | 9.0<br>8.5     | –<br>–     | dB   |
| 1 dB Gain Compression Output Power | $P_{O(1\text{ dB})}$ | f = 0.9 GHz<br>f = 1.5 GHz               | +9.0<br>+7.0   | +11.5<br>+9.5  | –<br>–     | dBm  |
| Saturated Output Power             | $P_{O(sat)}$         | f = 0.9 GHz<br>f = 1.5 GHz               | –<br>–         | +12.5<br>+11.0 | –<br>–     | dBm  |

**STANDARD CHARACTERISTICS FOR REFERENCE**

(Unless otherwise specified,  $T_A = +25^\circ\text{C}$ ,  $V_{CC} = V_{out} = 3.0\text{ V}$ ,  $Z_s = Z_L = 50\ \Omega$ )

**$\mu$ PC2762TB,  $\mu$ PC2763TB**

| Parameter                            | Symbol       | Test Conditions  |  | Reference      |      |      |                |       |      | Unit |
|--------------------------------------|--------------|--|--|----------------|------|------|----------------|-------|------|------|
|                                      |              |  |  | $\mu$ PC2762TB |      |      | $\mu$ PC2763TB |       |      |      |
|                                      |              |  |  | MIN.           | TYP. | MAX. | MIN.           | TYP.  | MAX. |      |
| Saturated Output Power               | $P_{O(sat)}$ | f = 0.9 GHz  |  | –              | +9.0 | –    | –              | +11.0 | –    | dBm  |
|                                      |              | f = 1.9 GHz  |  | –              | +8.5 | –    | –              | +8.0  | –    |      |
| Adjacent Channel Power               | $P_{adj}$    | f = 0.9 GHz<br>$\pi/4$ QPSK wave <sup>Note</sup><br>$P_o = +4\text{ dBm}$  | $\Delta f = \pm 50\text{ kHz}$                           | –              | –64  | –    | –              | –61   | –    | dBc  |
|                                      |              |  | $\Delta f = \pm 100\text{ kHz}$                          | –              | –64  | –    | –              | –62   | –    |      |
| 3rd Order Intermodulation Distortion | $IM_3$       | 2 sine wave input.<br>Output of each tone<br>$P_{O(each)} = +4\text{ dBm}$ | f <sub>1</sub> = 0.900 GHz<br>f <sub>2</sub> = 0.902 GHz | –              | –16  | –    | –              | –27   | –    | dBc  |
|                                      |              |  | f <sub>1</sub> = 1.900 GHz<br>f <sub>2</sub> = 1.902 GHz | –              | –10  | –    | –              | –14   | –    |      |


**Note**  $\pi/4$  DQPSK modulated wave input, data rate 42 kbps, Filter roll off  $\alpha = 0.5$ , PN 9

**$\mu$ PC2771TB**

| Parameter                            | Symbol     | Test Conditions  |   | Reference |            |        | Unit |
|--------------------------------------|------------|--|---|-----------|------------|--------|------|
|                                      |            |  |   | MIN.      | TYP.       | MAX.   |      |
| Adjacent Channel Power 1             | $P_{adj1}$ | f = 0.9 GHz<br>$\pi/4$ QPSK wave <sup>Note</sup><br>$P_o = +7\text{ dBm}$  | $\Delta f = \pm 50\text{ kHz}$<br>$\Delta f = \pm 100\text{ kHz}$ | –<br>–    | –61<br>–72 | –<br>– | dBc  |
| Adjacent Channel Power 2             | $P_{adj2}$ | f = 1.5 GHz<br>$\pi/4$ QPSK wave <sup>Note</sup><br>$P_o = +7\text{ dBm}$  | $\Delta f = \pm 50\text{ kHz}$<br>$\Delta f = \pm 100\text{ kHz}$ | –<br>–    | –59<br>–71 | –<br>– |      |
| 3rd Order Intermodulation Distortion | $IM_3$     | 2 sine wave input.<br>Output of each tone<br>$P_{O(each)} = +7\text{ dBm}$ | f <sub>1</sub> = 0.900 GHz<br>f <sub>2</sub> = 0.902 GHz          | –         | –18        | –      | dBc  |
|                                      |            |  | f <sub>1</sub> = 1.500 GHz<br>f <sub>2</sub> = 1.502 GHz          | –         | –12        | –      |      |

**Note**  $\pi/4$  DQPSK modulated wave input, data rate 42 kbps, Filter roll off  $\alpha = 0.5$ , PN 9

**TEST CIRCUIT**

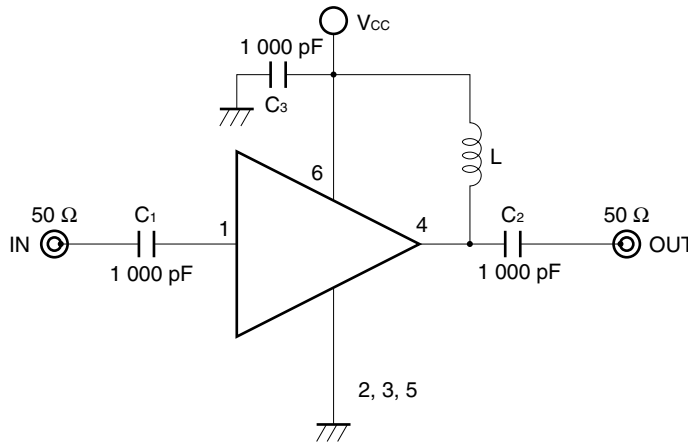

**COMPONENTS OF TEST CIRCUIT FOR MEASURING ELECTRICAL CHARACTERISTICS**

|                                 | Type      | Value    |
|---------------------------------|-----------|----------|
| C <sub>1</sub> , C <sub>2</sub> | Bias Tee  | 1 000 pF |
| C <sub>3</sub>                  | Capacitor | 1 000 pF |
| L                               | Bias Tee  | 1 000 nH |

**EXAMPLE OF ACTUAL APPLICATION COMPONENTS**

|                                  | Type           | Value    | Operating Frequency |
|----------------------------------|----------------|----------|---------------------|
| C <sub>1</sub> to C <sub>3</sub> | Chip capacitor | 1 000 pF | 100 MHz or higher   |
| L                                | Chip inductor  | 100 nH   | 100 MHz or higher   |
|                                  |                | 10 nH    | 2.0 GHz or higher   |

**INDUCTOR FOR THE OUTPUT PIN**

The internal output transistor of this IC consumes 20 mA, to output medium power. To supply current for output transistor, connect an inductor between the Vcc pin (pin 6) and output pin (pin 4). Select large value inductance, as listed above.

The inductor has both DC and AC effects. In terms of DC, the inductor biases the output transistor with minimum voltage drop to output enable high level. In terms of AC, the inductor make output-port-impedance higher to get enough gain. In this case, large inductance and Q is suitable.

For above reason, select an inductance of 100 Ω or over impedance in the operating frequency. The gain is a peak in the operating frequency band, and suppressed at lower frequencies.

The recommendable inductance can be chosen from example of actual application components list as shown above.

**CAPACITORS FOR THE Vcc, INPUT, AND OUTPUT PINS**

Capacitors of 1 000 pF are recommendable as the bypass capacitor for the Vcc pin and the coupling capacitors for the input and output pins.


The bypass capacitor connected to the Vcc pin is used to minimize ground impedance of Vcc pin. So, stable bias can be supplied against Vcc fluctuation.

The coupling capacitors, connected to the input and output pins, are used to cut the DC and minimize RF serial impedance. Their capacitance are therefore selected as lower impedance against a 50 Ω load. The capacitors thus perform as high pass filters, suppressing low frequencies to DC.

To obtain a flat gain from 100 MHz upwards, 1 000 pF capacitors are used in the test circuit. In the case of under 10 MHz operation, increase the value of coupling capacitor such as 10 000 pF. Because the coupling capacitors are determined by equation,  $C = 1/(2\pi Rf_c)$ .



ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

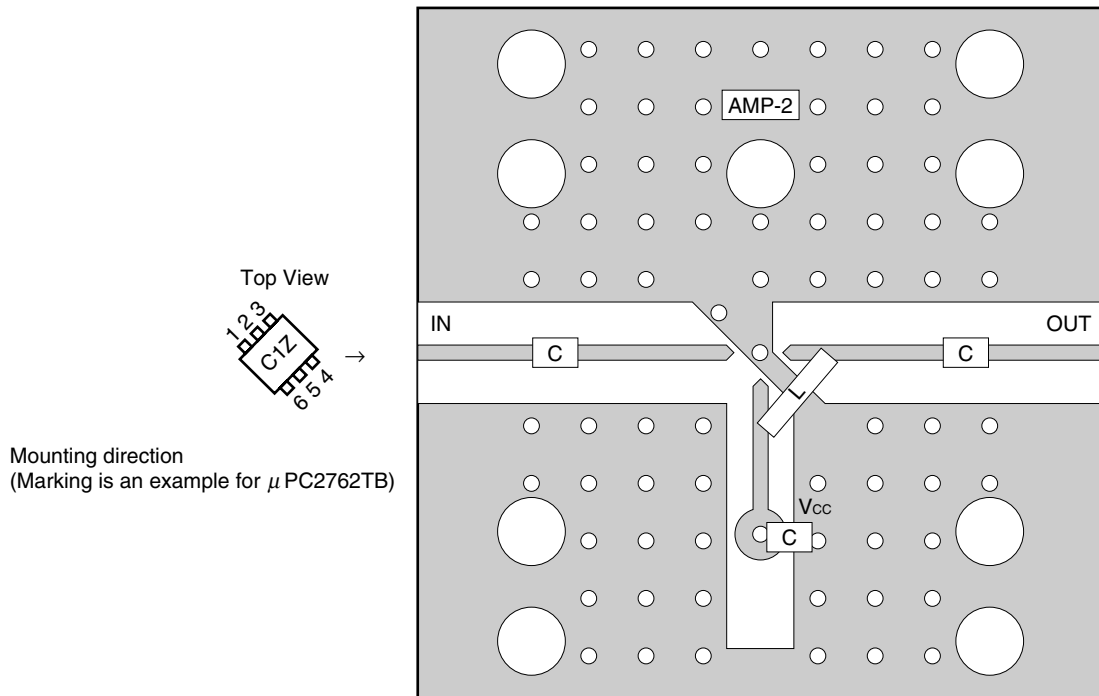

COMPONENT LIST

|   | Value          |
|---|----------------|
| C | 1 000 pF       |
| L | Example: 10 nH |

Notes


1. 30 × 30 × 0.4 mm double sided copper clad polyimide board.
2. Back side: GND pattern
3. Solder plated on pattern
4. ○ ○ : Through holes

For more information on the use of this IC, refer to the following application note: **USAGE AND APPLICATIONS OF 6-PIN SUPER MINI-MOLD SILICON MEDIUM-POWER HIGH-FREQUENCY AMPLIFIER MMIC (P13252E).**


TYPICAL CHARACTERISTICS (Unless otherwise specified,  $T_A = +25^\circ\text{C}$ )

–  $\mu$ PC2762TB –


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

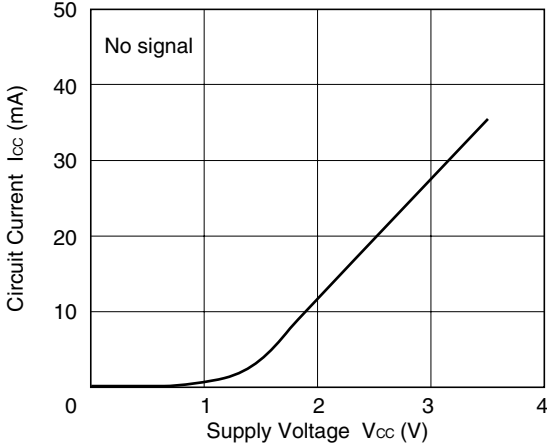


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

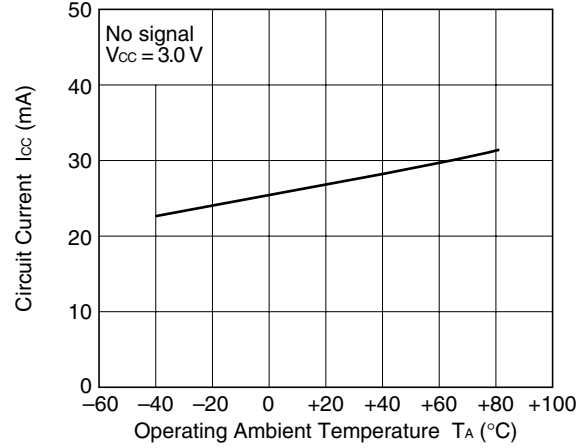


NOISE FIGURE, POWER GAIN vs. FREQUENCY

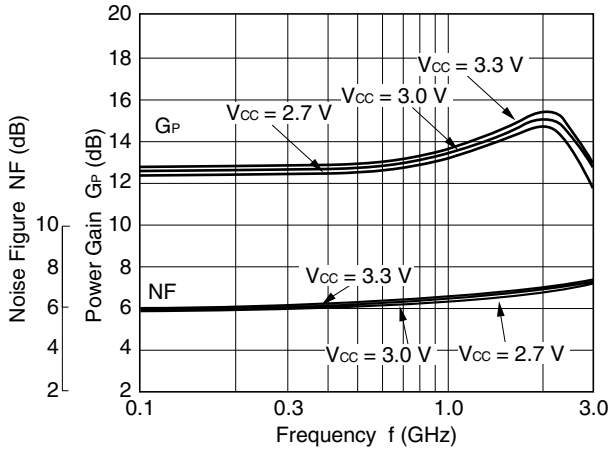


POWER GAIN vs. FREQUENCY

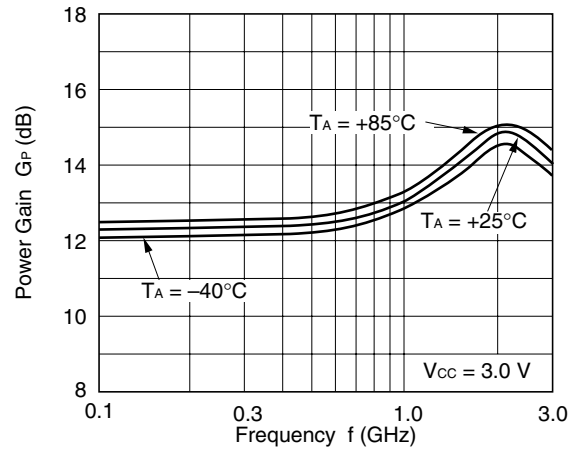







ISOLATION vs. FREQUENCY

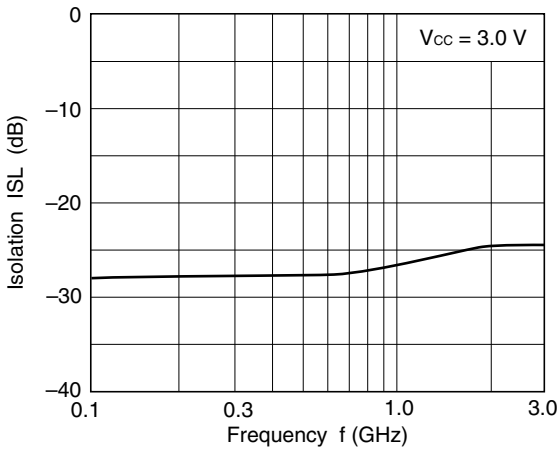

INPUT RETURN LOSS, OUTPUT RETURN LOSS vs. FREQUENCY

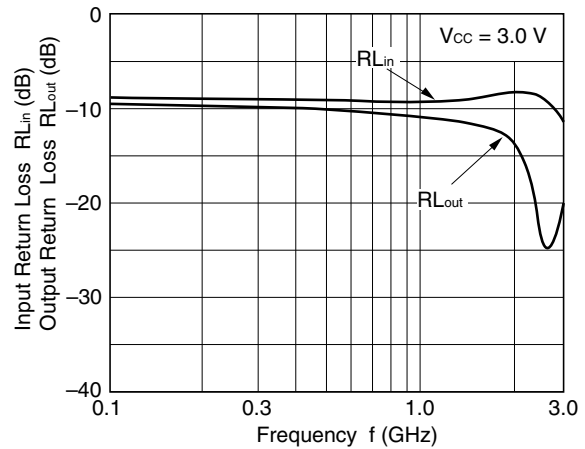


-  $\mu$ PC2762TB -

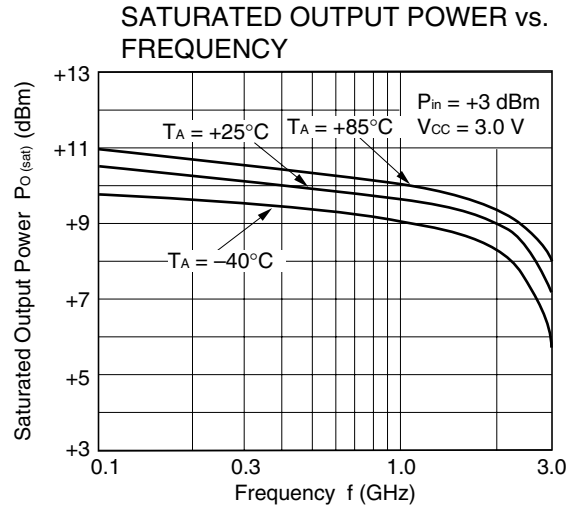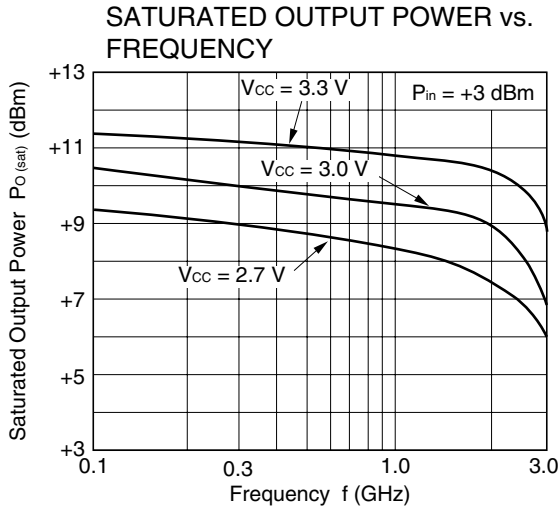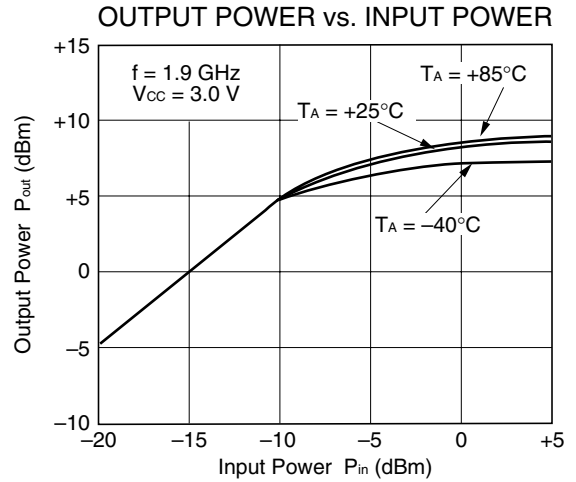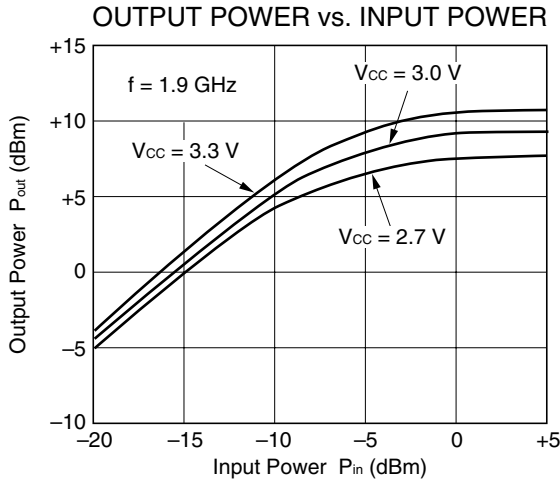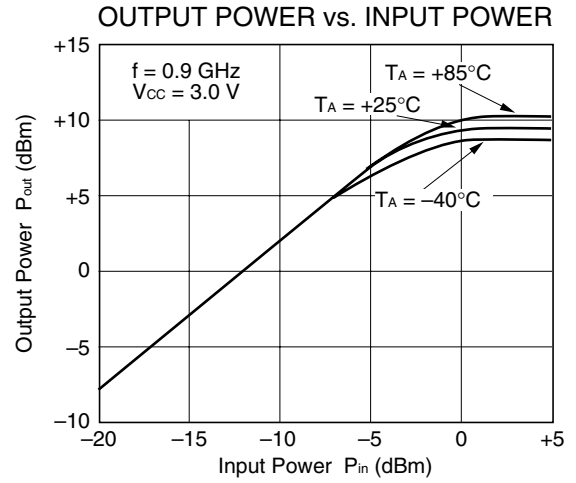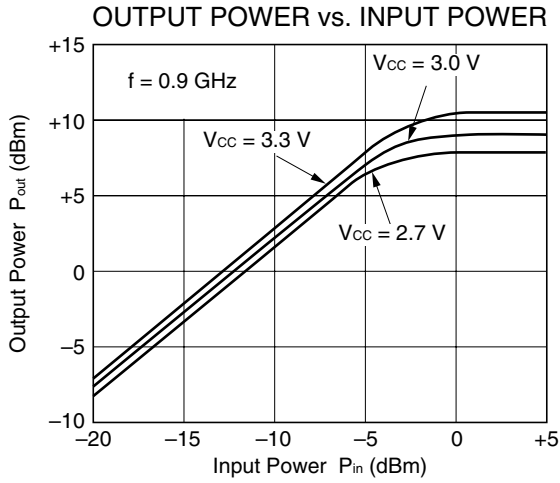


-  $\mu$ PC2762TB -

3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE

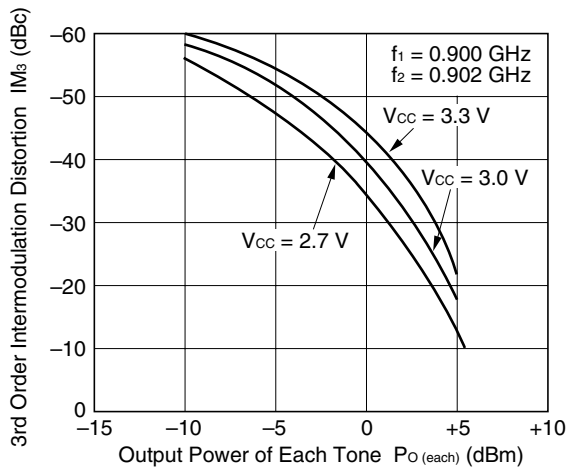

3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE

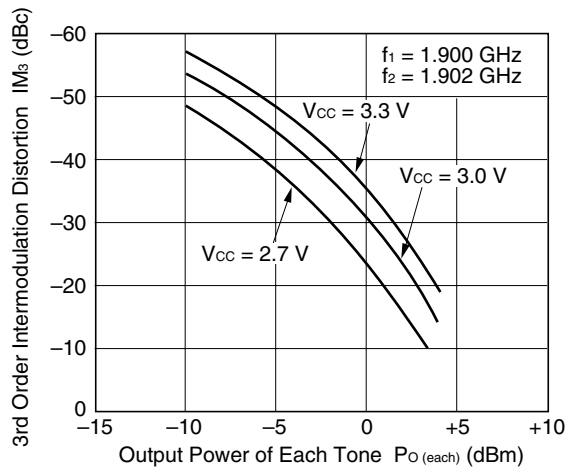


**Remark** The graphs indicate nominal characteristics.


**S-PARAMETERS (T<sub>A</sub> = +25°C, V<sub>CC</sub> = V<sub>out</sub> = 3.0 V)**

–  $\mu$ PC2762TB –

**S<sub>11</sub>-FREQUENCY**

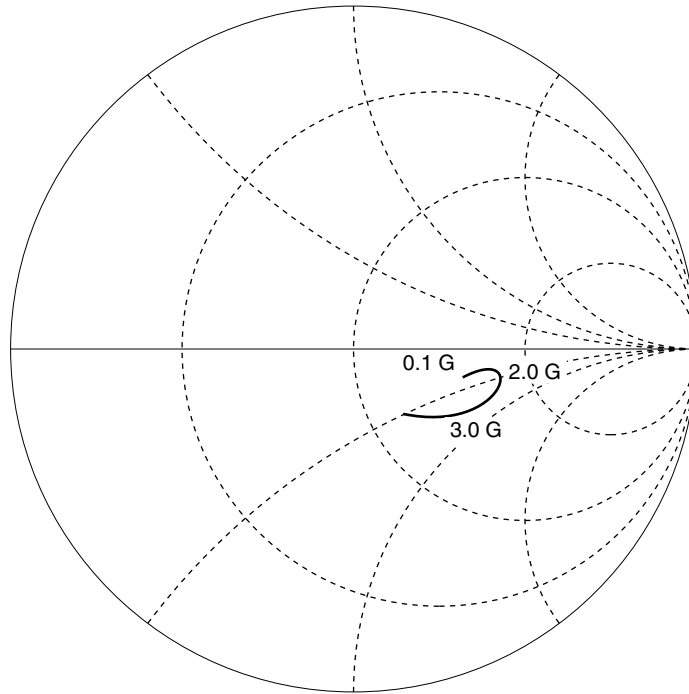

**S<sub>22</sub>-FREQUENCY**

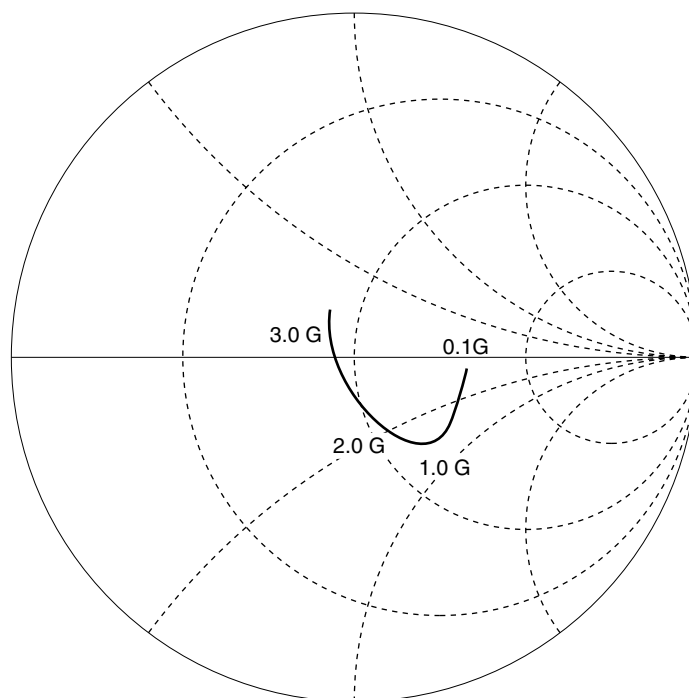

**TYPICAL S-PARAMETER VALUES (T<sub>A</sub> = +25°C)**

$\mu$ PC2762TB


V<sub>CC</sub> = V<sub>out</sub> = 3.0 V, I<sub>CC</sub> = 29 mA

| FREQUENCY<br>MHz | S <sub>11</sub> |       | S <sub>21</sub> |        | S <sub>12</sub> |      | S <sub>22</sub> |        | K    |
|------------------|-----------------|-------|-----------------|--------|-----------------|------|-----------------|--------|------|
|                  | MAG.            | ANG.  | MAG.            | ANG.   | MAG.            | ANG. | MAG.            | ANG.   |      |
| 100.0000         | 0.338           | -1.3  | 4.560           | -3.4   | 0.039           | 1.0  | 0.310           | -5.5   | 2.23 |
| 200.0000         | 0.346           | -2.0  | 4.581           | -7.6   | 0.039           | 2.7  | 0.311           | -9.5   | 2.20 |
| 300.0000         | 0.348           | -1.2  | 4.616           | -11.3  | 0.039           | 6.8  | 0.302           | -12.3  | 2.20 |
| 400.0000         | 0.340           | -1.9  | 4.661           | -15.8  | 0.040           | 8.1  | 0.296           | -16.2  | 2.18 |
| 500.0000         | 0.329           | -3.1  | 4.689           | -19.5  | 0.040           | 11.6 | 0.290           | -20.2  | 2.20 |
| 600.0000         | 0.324           | -6.2  | 4.726           | -23.6  | 0.041           | 13.7 | 0.292           | -24.1  | 2.12 |
| 700.0000         | 0.341           | -8.1  | 4.844           | -27.4  | 0.042           | 15.8 | 0.291           | -26.2  | 2.01 |
| 800.0000         | 0.359           | -7.6  | 4.927           | -31.5  | 0.043           | 18.1 | 0.292           | -28.3  | 1.90 |
| 900.0000         | 0.378           | -6.5  | 5.057           | -35.8  | 0.044           | 19.3 | 0.284           | -30.9  | 1.77 |
| 1000.0000        | 0.375           | -5.1  | 5.179           | -41.0  | 0.045           | 20.3 | 0.280           | -35.3  | 1.72 |
| 1100.0000        | 0.363           | -5.2  | 5.306           | -45.9  | 0.047           | 22.1 | 0.285           | -40.0  | 1.64 |
| 1200.0000        | 0.353           | -6.7  | 5.400           | -51.0  | 0.047           | 23.7 | 0.288           | -43.4  | 1.62 |
| 1300.0000        | 0.357           | -8.8  | 5.567           | -56.5  | 0.048           | 26.1 | 0.288           | -45.7  | 1.54 |
| 1400.0000        | 0.377           | -11.7 | 5.706           | -61.7  | 0.049           | 24.5 | 0.285           | -47.9  | 1.44 |
| 1500.0000        | 0.402           | -12.7 | 5.820           | -68.0  | 0.052           | 26.7 | 0.282           | -52.8  | 1.32 |
| 1600.0000        | 0.414           | -13.2 | 5.987           | -73.7  | 0.052           | 26.8 | 0.285           | -58.1  | 1.27 |
| 1700.0000        | 0.426           | -13.6 | 6.081           | -80.1  | 0.055           | 29.0 | 0.288           | -62.0  | 1.18 |
| 1800.0000        | 0.434           | -16.1 | 6.182           | -86.7  | 0.056           | 28.2 | 0.291           | -66.1  | 1.14 |
| 1900.0000        | 0.448           | -19.0 | 6.229           | -93.2  | 0.057           | 28.5 | 0.286           | -70.4  | 1.09 |
| 2000.0000        | 0.463           | -21.7 | 6.328           | -99.7  | 0.057           | 28.0 | 0.282           | -76.2  | 1.07 |
| 2100.0000        | 0.483           | -23.9 | 6.382           | -106.7 | 0.058           | 28.5 | 0.282           | -81.5  | 1.01 |
| 2200.0000        | 0.492           | -25.8 | 6.431           | -113.8 | 0.058           | 29.0 | 0.282           | -86.9  | 0.99 |
| 2300.0000        | 0.492           | -29.7 | 6.424           | -121.2 | 0.060           | 30.1 | 0.278           | -91.7  | 0.99 |
| 2400.0000        | 0.486           | -34.6 | 6.329           | -128.8 | 0.060           | 30.2 | 0.268           | -98.4  | 1.01 |
| 2500.0000        | 0.489           | -40.4 | 6.146           | -136.1 | 0.062           | 31.1 | 0.260           | -104.5 | 1.02 |
| 2600.0000        | 0.500           | -44.6 | 5.997           | -143.1 | 0.061           | 32.1 | 0.251           | -111.3 | 1.05 |
| 2700.0000        | 0.511           | -48.5 | 5.822           | -149.9 | 0.064           | 31.4 | 0.248           | -116.7 | 1.03 |
| 2800.0000        | 0.511           | -50.4 | 5.693           | -157.0 | 0.066           | 34.0 | 0.237           | -121.5 | 1.04 |
| 2900.0000        | 0.494           | -52.9 | 5.553           | -163.0 | 0.065           | 33.8 | 0.222           | -128.3 | 1.11 |
| 3000.0000        | 0.465           | -55.9 | 5.334           | -169.5 | 0.065           | 35.5 | 0.203           | -134.5 | 1.20 |
| 3100.0000        | 0.441           | -60.6 | 5.157           | -175.5 | 0.066           | 35.5 | 0.189           | -141.1 | 1.27 |


TYPICAL CHARACTERISTICS (Unless otherwise specified,  $T_A = +25^\circ\text{C}$ )

–  $\mu$ PC2763TB –


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

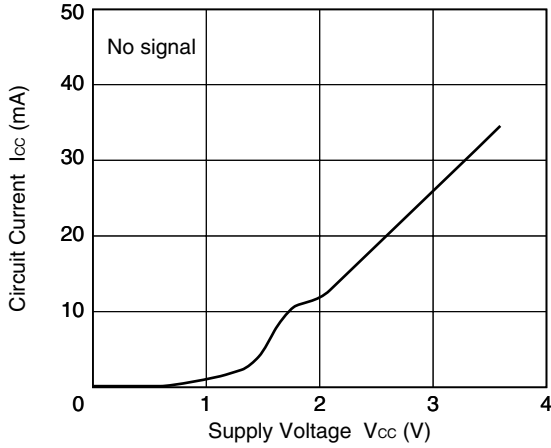


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

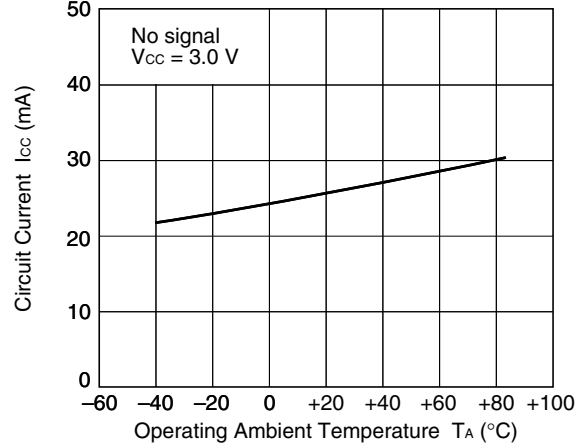


NOISE FIGURE, POWER GAIN vs. FREQUENCY

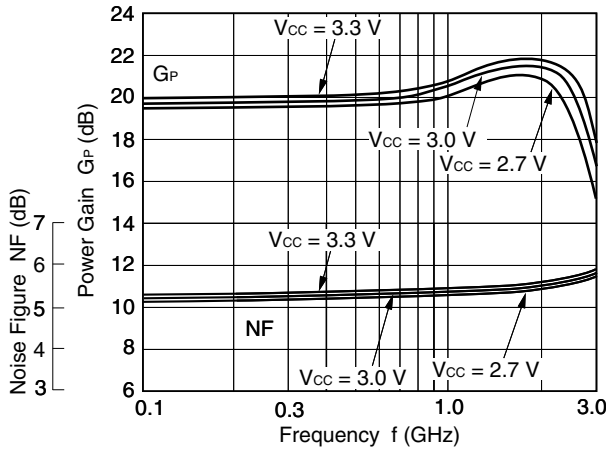


POWER GAIN vs. FREQUENCY

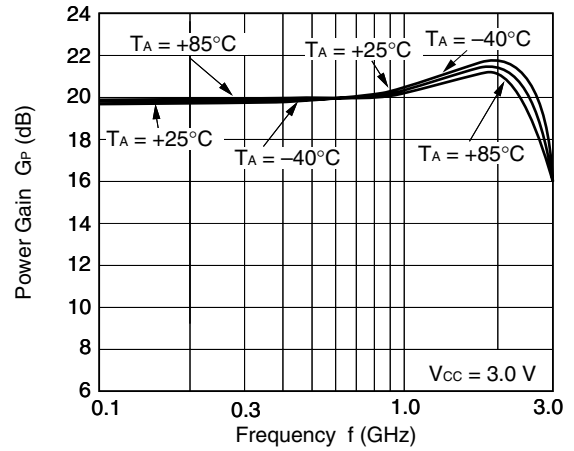







ISOLATION vs. FREQUENCY

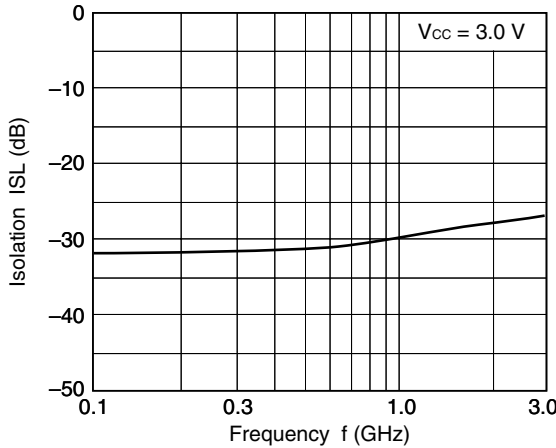

INPUT RETURN LOSS, OUTPUT RETURN LOSS vs. FREQUENCY

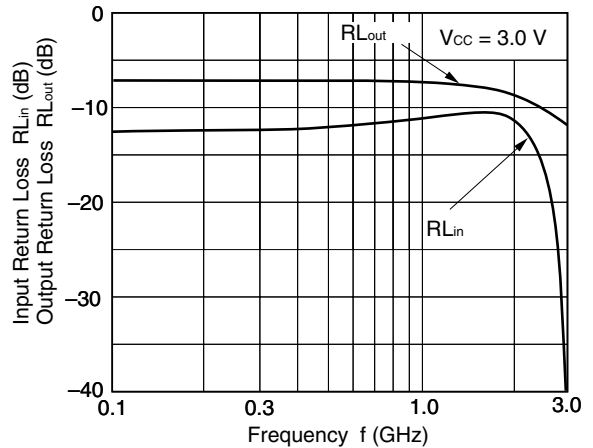


-  $\mu$ PC2763TB -

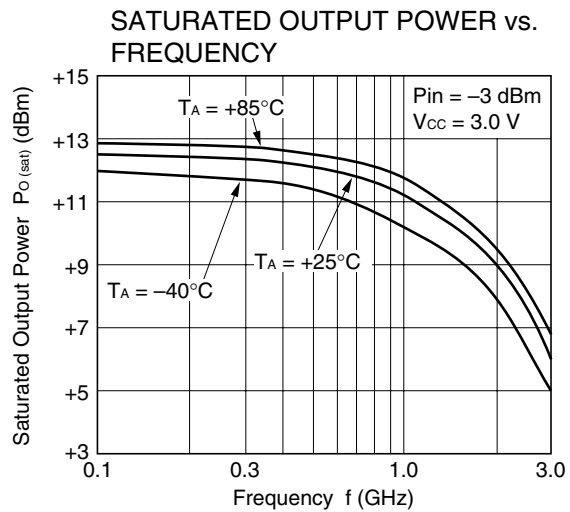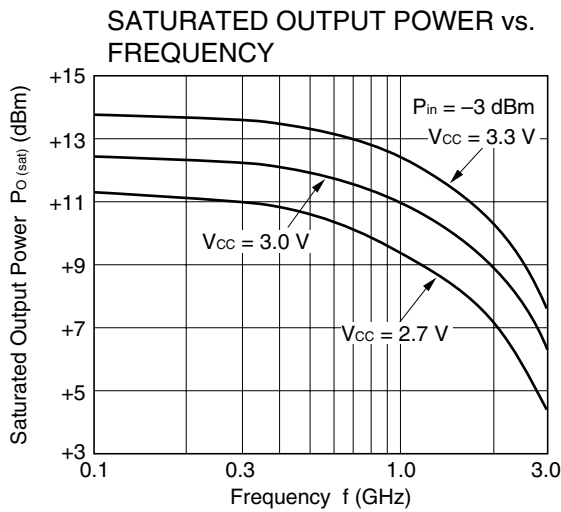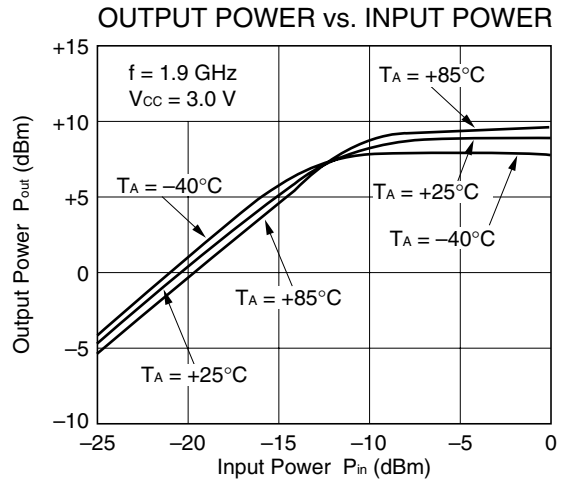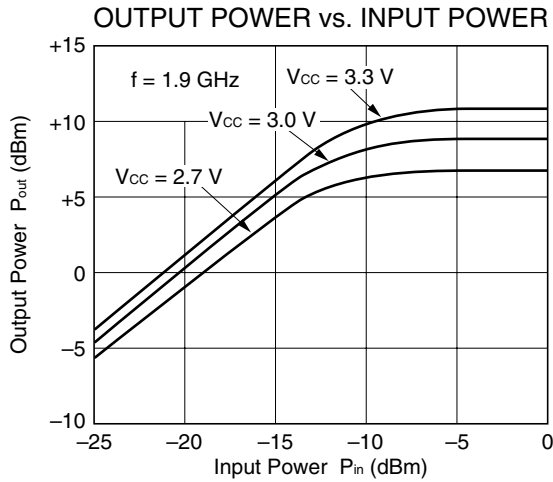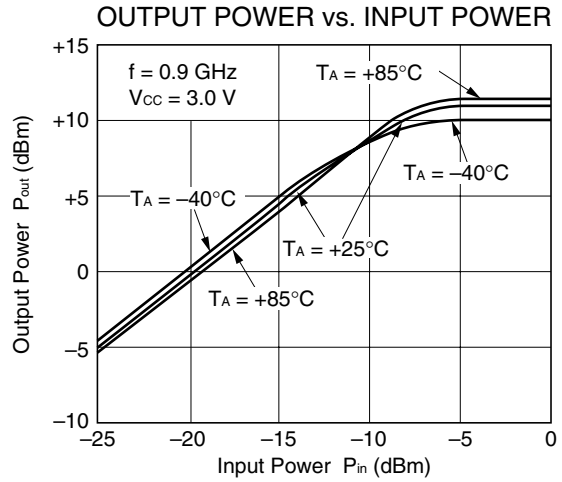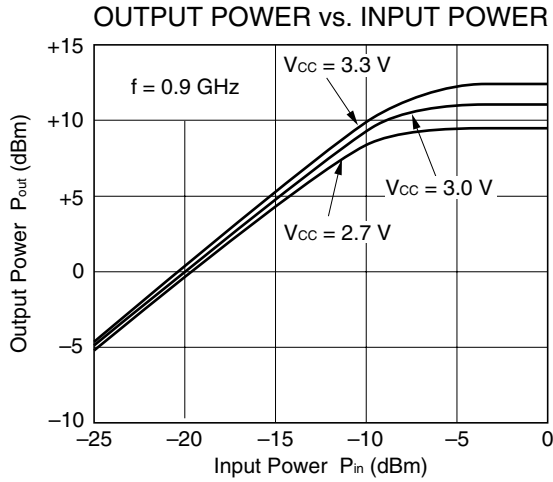




–  $\mu$ PC2763TB –

3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE

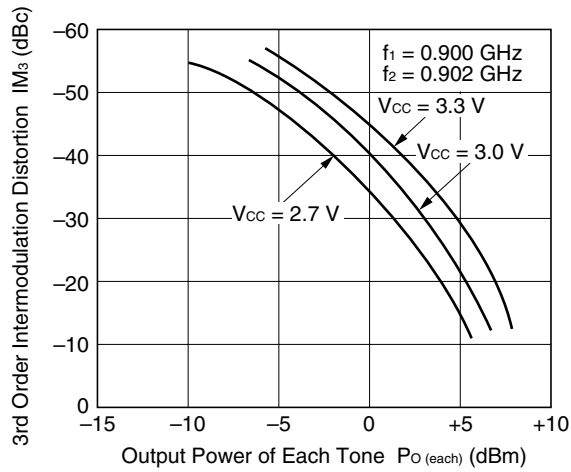

3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE

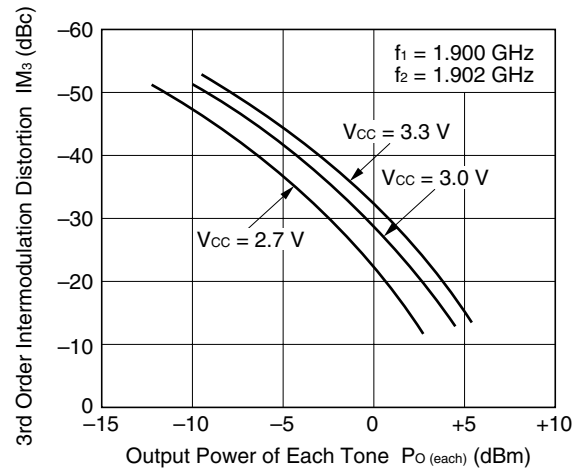


**Remark** The graphs indicate nominal characteristics.


**S-PARAMETERS (T<sub>A</sub> = +25°C, V<sub>CC</sub> = V<sub>out</sub> = 3.0 V)**

–  $\mu$ PC2763TB –

**S<sub>11</sub>-FREQUENCY**

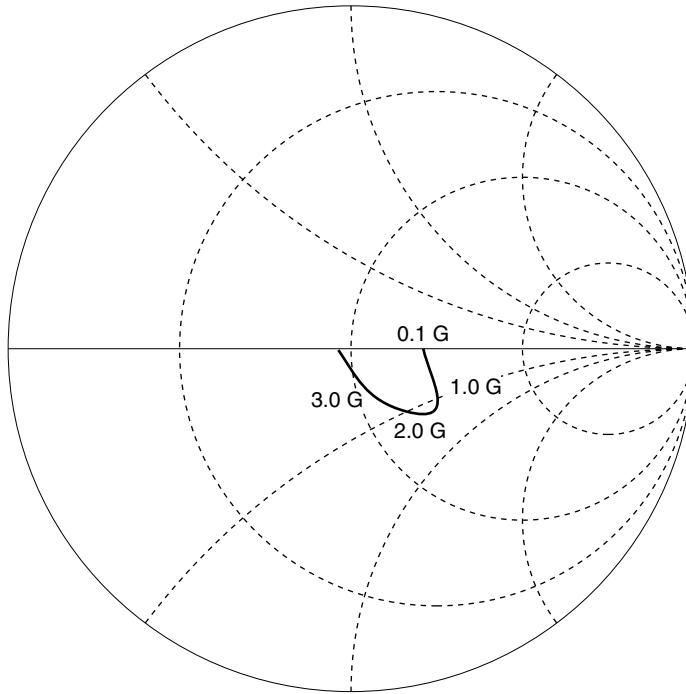

**S<sub>22</sub>-FREQUENCY**

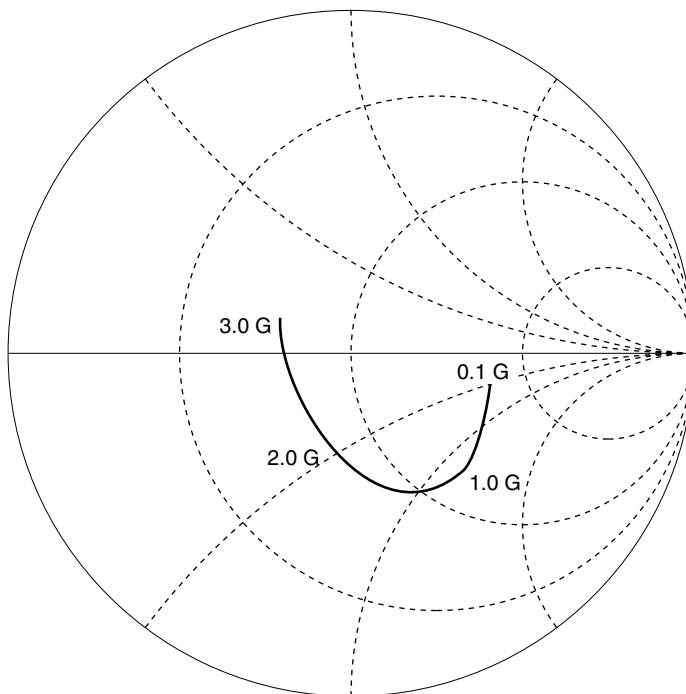

TYPICAL S-PARAMETER VALUES (T<sub>A</sub> = +25°C)

$\mu$ PC2763TB


V<sub>CC</sub> = V<sub>out</sub> = 3.0 V, I<sub>CC</sub> = 28 mA

| FREQUENCY<br>MHz | S <sub>11</sub> |       | S <sub>21</sub> |        | S <sub>12</sub> |      | S <sub>22</sub> |        | K    |
|------------------|-----------------|-------|-----------------|--------|-----------------|------|-----------------|--------|------|
|                  | MAG.            | ANG.  | MAG.            | ANG.   | MAG.            | ANG. | MAG.            | ANG.   |      |
| 100.0000         | 0.231           | -1.4  | 10.210          | -3.8   | 0.023           | 2.4  | 0.406           | -4.1   | 1.68 |
| 200.0000         | 0.242           | -0.2  | 10.305          | -8.5   | 0.023           | 7.8  | 0.412           | -7.5   | 1.66 |
| 300.0000         | 0.250           | 2.7   | 10.464          | -12.9  | 0.024           | 9.3  | 0.407           | -9.9   | 1.58 |
| 400.0000         | 0.245           | 2.8   | 10.655          | -18.2  | 0.024           | 13.4 | 0.407           | -13.9  | 1.55 |
| 500.0000         | 0.242           | 2.0   | 10.863          | -22.8  | 0.026           | 16.1 | 0.405           | -17.6  | 1.44 |
| 600.0000         | 0.241           | -2.2  | 11.093          | -28.1  | 0.027           | 19.9 | 0.414           | -21.6  | 1.37 |
| 700.0000         | 0.263           | -5.3  | 11.544          | -33.2  | 0.028           | 22.3 | 0.419           | -24.6  | 1.25 |
| 800.0000         | 0.291           | -5.6  | 11.843          | -39.0  | 0.029           | 22.5 | 0.424           | -27.7  | 1.16 |
| 900.0000         | 0.316           | -5.1  | 12.291          | -45.1  | 0.029           | 23.9 | 0.424           | -31.9  | 1.09 |
| 1000.0000        | 0.322           | -4.0  | 12.676          | -52.4  | 0.030           | 25.6 | 0.425           | -37.1  | 1.02 |
| 1100.0000        | 0.318           | -5.4  | 13.066          | -59.8  | 0.031           | 24.1 | 0.438           | -42.5  | 0.96 |
| 1200.0000        | 0.309           | -9.0  | 13.311          | -67.3  | 0.031           | 27.0 | 0.442           | -47.8  | 0.96 |
| 1300.0000        | 0.322           | -14.2 | 13.661          | -75.8  | 0.033           | 28.8 | 0.441           | -51.2  | 0.90 |
| 1400.0000        | 0.344           | -20.6 | 13.845          | -83.9  | 0.033           | 28.5 | 0.434           | -56.0  | 0.87 |
| 1500.0000        | 0.371           | -23.7 | 13.824          | -93.0  | 0.035           | 30.1 | 0.435           | -62.2  | 0.82 |
| 1600.0000        | 0.380           | -27.5 | 13.890          | -101.5 | 0.035           | 28.1 | 0.439           | -68.9  | 0.80 |
| 1700.0000        | 0.388           | -30.6 | 13.634          | -110.5 | 0.036           | 29.2 | 0.439           | -74.6  | 0.78 |
| 1800.0000        | 0.378           | -36.4 | 13.236          | -119.6 | 0.035           | 29.9 | 0.428           | -81.3  | 0.84 |
| 1900.0000        | 0.378           | -42.1 | 12.724          | -127.9 | 0.035           | 30.9 | 0.411           | -87.0  | 0.89 |
| 2000.0000        | 0.375           | -46.6 | 12.290          | -136.1 | 0.035           | 32.9 | 0.393           | -93.4  | 0.94 |
| 2100.0000        | 0.369           | -50.5 | 11.707          | -144.0 | 0.035           | 33.0 | 0.385           | -99.6  | 0.99 |
| 2200.0000        | 0.351           | -53.8 | 11.130          | -151.7 | 0.036           | 35.7 | 0.373           | -104.9 | 1.06 |
| 2300.0000        | 0.331           | -59.8 | 10.524          | -159.1 | 0.036           | 36.8 | 0.359           | -110.3 | 1.13 |
| 2400.0000        | 0.306           | -66.4 | 9.824           | -165.9 | 0.034           | 38.7 | 0.336           | -117.5 | 1.31 |
| 2500.0000        | 0.300           | -73.1 | 9.152           | -172.3 | 0.035           | 40.1 | 0.321           | -123.3 | 1.41 |
| 2600.0000        | 0.294           | -75.8 | 8.583           | -178.2 | 0.034           | 43.8 | 0.306           | -129.4 | 1.55 |
| 2700.0000        | 0.290           | -77.1 | 8.029           | -176.2 | 0.035           | 46.3 | 0.299           | -133.9 | 1.58 |
| 2800.0000        | 0.270           | -77.7 | 7.610           | -170.6 | 0.037           | 47.7 | 0.288           | -138.6 | 1.63 |
| 2900.0000        | 0.248           | -78.7 | 7.240           | -166.1 | 0.039           | 51.1 | 0.270           | -143.6 | 1.67 |
| 3000.0000        | 0.219           | -82.3 | 6.827           | -161.2 | 0.039           | 53.6 | 0.253           | -150.1 | 1.79 |
| 3100.0000        | 0.198           | -88.7 | 6.516           | -156.9 | 0.040           | 55.1 | 0.244           | -156.2 | 1.88 |


TYPICAL CHARACTERISTICS (Unless otherwise specified,  $T_A = +25^\circ\text{C}$ )

-  $\mu$ PC2771TB -


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

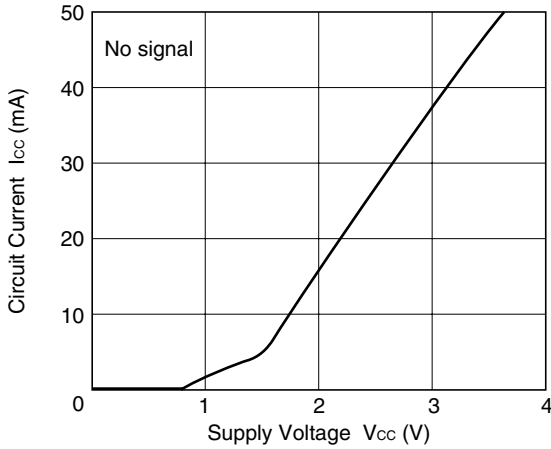


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

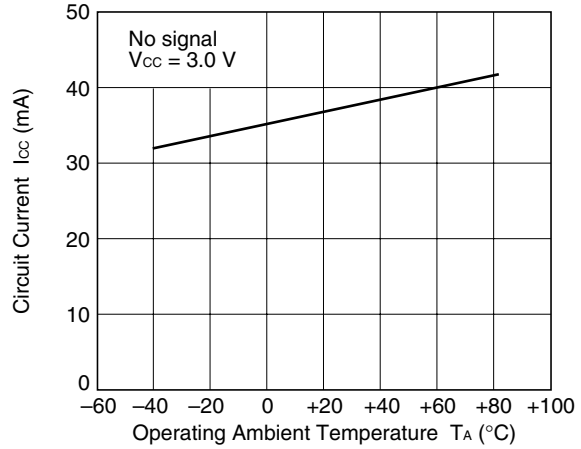


NOISE FIGURE, POWER GAIN vs. FREQUENCY

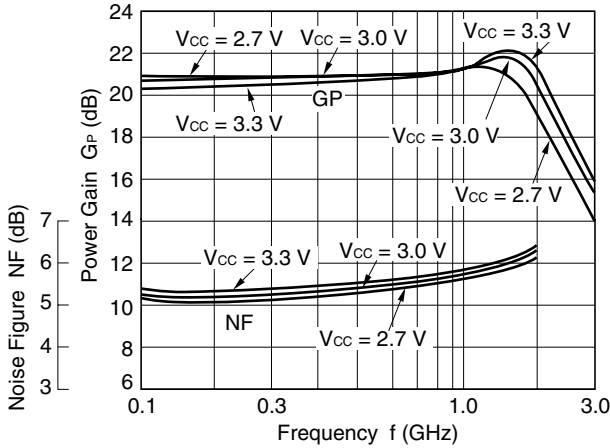


POWER GAIN vs. FREQUENCY

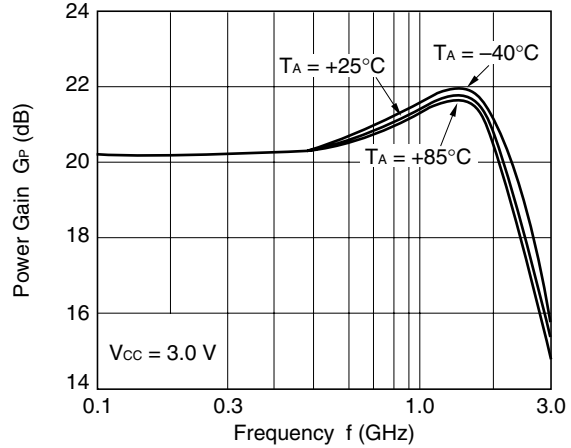







ISOLATION vs. FREQUENCY

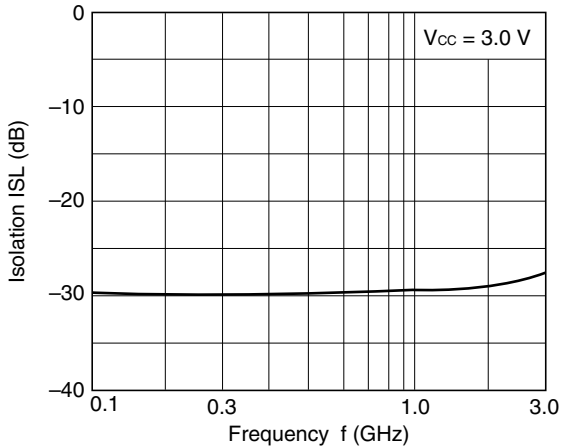



INPUT RETURN LOSS, OUTPUT RETURN LOSS vs. FREQUENCY

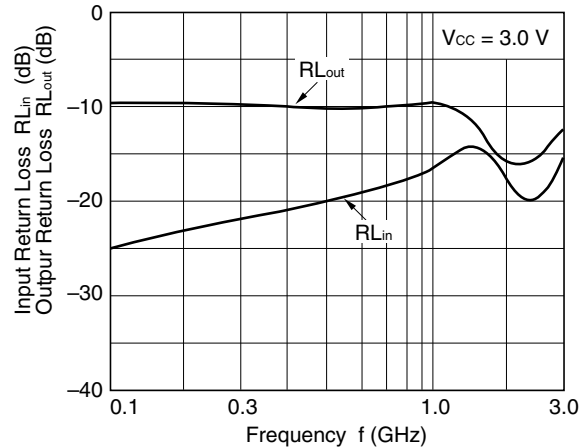


-  $\mu$ PC2771TB -

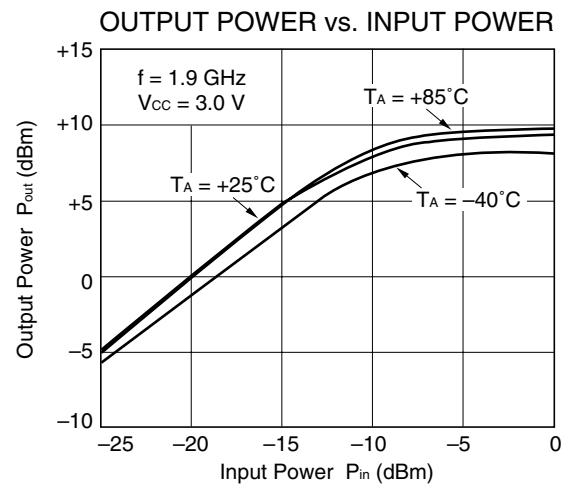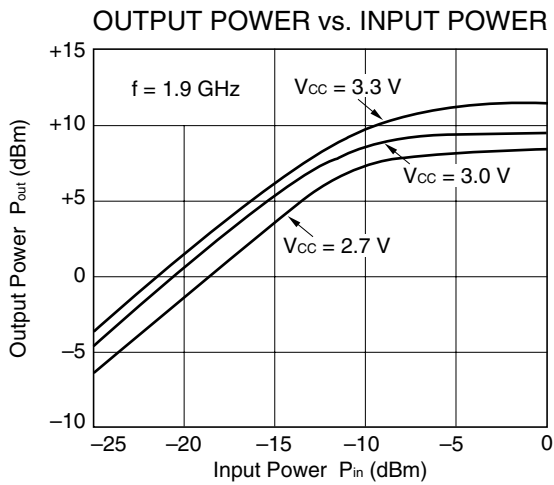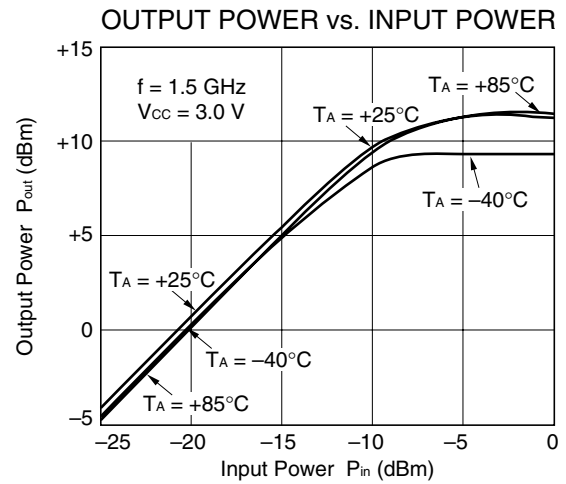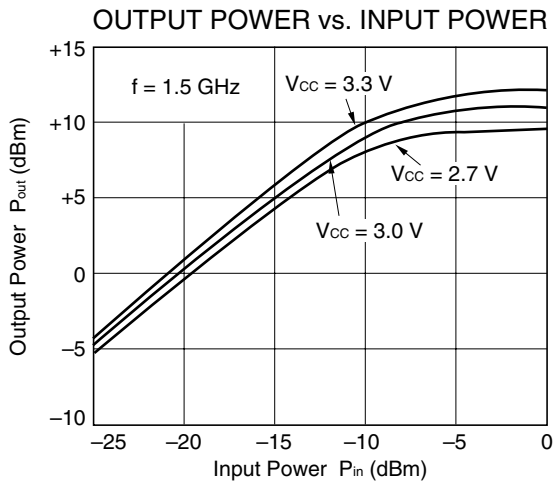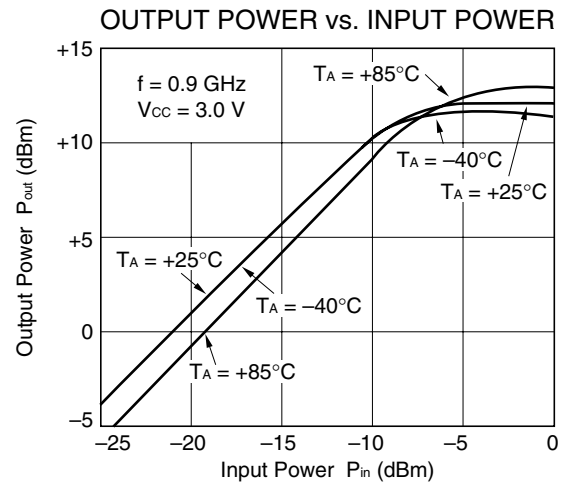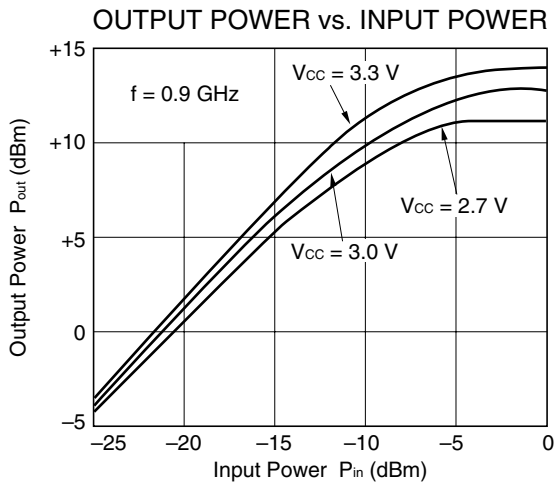


-  $\mu$ PC2771TB -

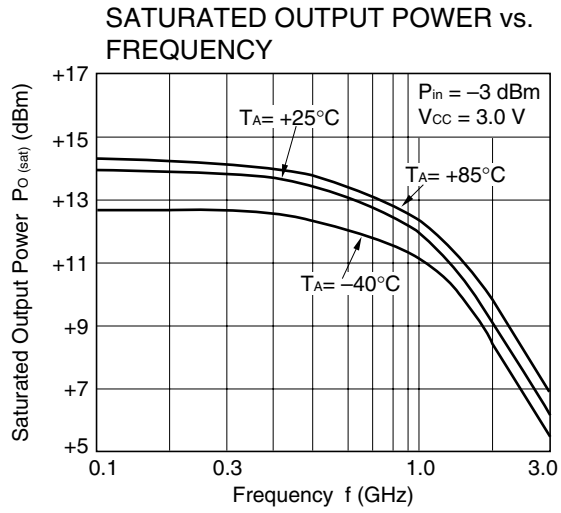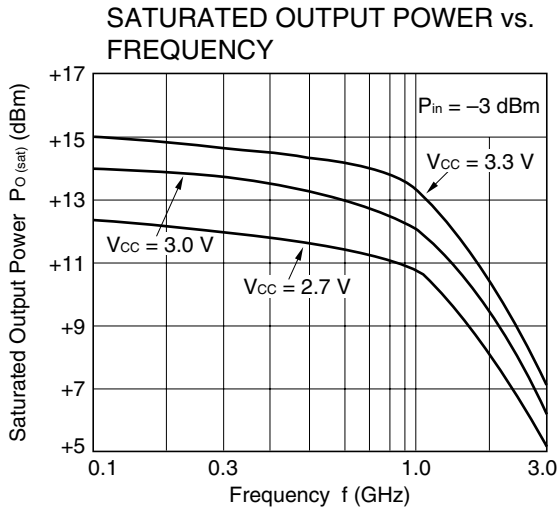

**3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE**

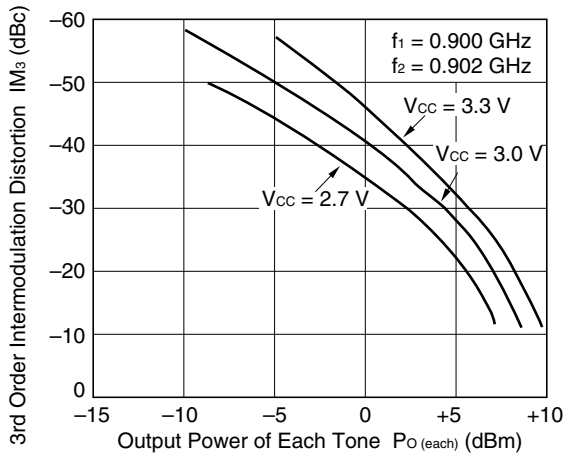

**3RD ORDER INTERMODULATION DISTORTION vs. OUTPUT POWER OF EACH TONE**

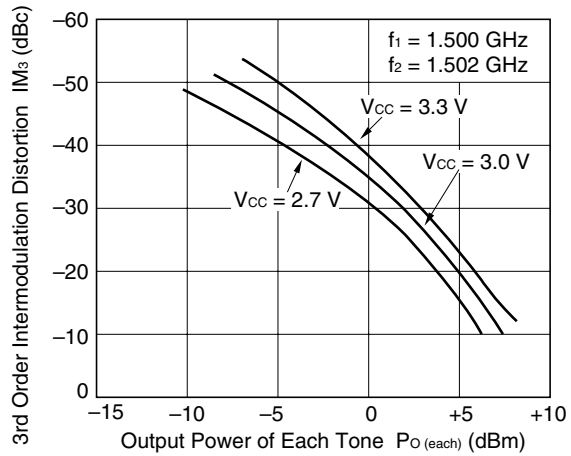


**Remark** The graphs indicate nominal characteristics.


**S-PARAMETERS (T<sub>A</sub> = +25°C, V<sub>CC</sub> = V<sub>out</sub> = 3.0 V)**

–  $\mu$ PC2771TB –

**S<sub>11</sub>-FREQUENCY**

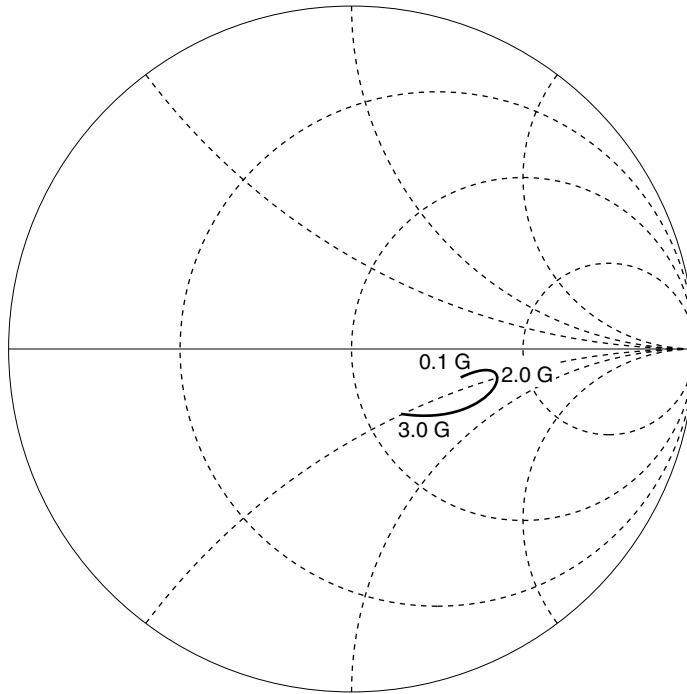

**S<sub>22</sub>-FREQUENCY**

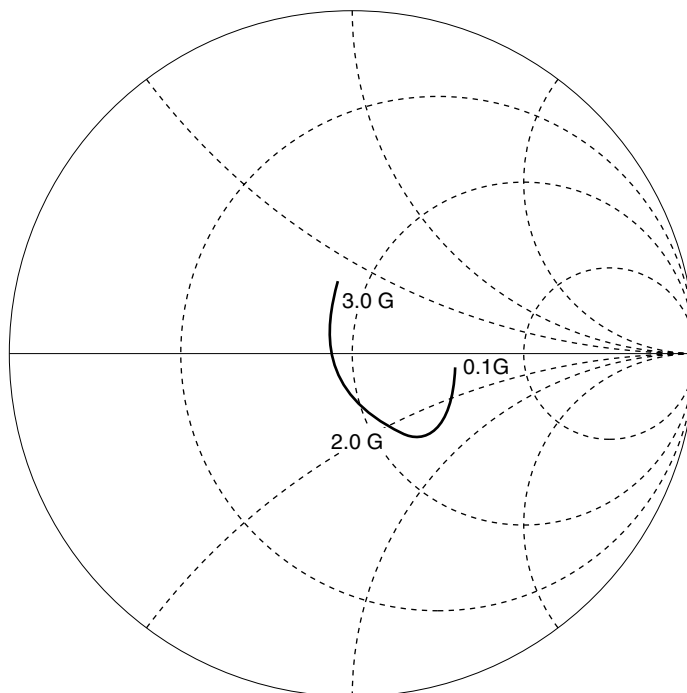

TYPICAL S-PARAMETER VALUES (T<sub>A</sub> = +25°C)

$\mu$ PC2771TB


V<sub>CC</sub> = V<sub>out</sub> = 3.0 V, I<sub>CC</sub> = 35 mA

| FREQUENCY<br>MHz | S <sub>11</sub> |       | S <sub>21</sub> |        | S <sub>12</sub> |      | S <sub>22</sub> |        | K    |
|------------------|-----------------|-------|-----------------|--------|-----------------|------|-----------------|--------|------|
|                  | MAG.            | ANG.  | MAG.            | ANG.   | MAG.            | ANG. | MAG.            | ANG.   |      |
| 100.0000         | 0.045           | 19.7  | 10.570          | -4.7   | 0.028           | 0.8  | 0.327           | -6.2   | 1.65 |
| 200.0000         | 0.057           | 37.0  | 10.638          | -9.5   | 0.028           | 5.0  | 0.325           | -11.5  | 1.63 |
| 300.0000         | 0.075           | 41.3  | 10.775          | -14.1  | 0.029           | 8.6  | 0.323           | -16.2  | 1.58 |
| 400.0000         | 0.090           | 43.3  | 11.004          | -19.4  | 0.030           | 11.1 | 0.326           | -20.9  | 1.49 |
| 500.0000         | 0.105           | 42.2  | 11.275          | -24.4  | 0.030           | 14.9 | 0.331           | -26.4  | 1.45 |
| 600.0000         | 0.118           | 40.2  | 11.586          | -30.0  | 0.031           | 15.8 | 0.342           | -32.0  | 1.37 |
| 700.0000         | 0.138           | 34.9  | 12.041          | -35.9  | 0.031           | 19.8 | 0.350           | -37.3  | 1.29 |
| 800.0000         | 0.163           | 32.5  | 12.367          | -42.1  | 0.032           | 20.1 | 0.359           | -42.8  | 1.20 |
| 900.0000         | 0.186           | 29.4  | 12.844          | -48.8  | 0.032           | 23.2 | 0.361           | -49.4  | 1.15 |
| 1000.0000        | 0.202           | 26.3  | 13.300          | -56.6  | 0.032           | 23.9 | 0.371           | -56.1  | 1.11 |
| 1100.0000        | 0.219           | 21.7  | 13.771          | -64.6  | 0.033           | 24.9 | 0.389           | -62.5  | 1.03 |
| 1200.0000        | 0.233           | 15.4  | 14.082          | -73.5  | 0.033           | 26.6 | 0.400           | -69.3  | 0.99 |
| 1300.0000        | 0.252           | 8.4   | 14.365          | -83.2  | 0.036           | 28.8 | 0.405           | -75.4  | 0.92 |
| 1400.0000        | 0.267           | -0.1  | 14.336          | -92.6  | 0.036           | 30.0 | 0.402           | -83.6  | 0.91 |
| 1500.0000        | 0.285           | -6.8  | 14.142          | -102.4 | 0.036           | 32.0 | 0.406           | -91.6  | 0.90 |
| 1600.0000        | 0.293           | -13.9 | 13.929          | -112.0 | 0.037           | 31.6 | 0.413           | -99.3  | 0.89 |
| 1700.0000        | 0.304           | -20.9 | 13.428          | -121.6 | 0.039           | 32.5 | 0.414           | -105.8 | 0.88 |
| 1800.0000        | 0.290           | -28.1 | 12.722          | -131.0 | 0.038           | 34.7 | 0.401           | -113.7 | 0.96 |
| 1900.0000        | 0.285           | -35.3 | 11.966          | -139.6 | 0.038           | 36.1 | 0.387           | -120.8 | 1.03 |
| 2000.0000        | 0.273           | -41.8 | 11.232          | -147.5 | 0.038           | 37.4 | 0.378           | -127.6 | 1.09 |
| 2100.0000        | 0.267           | -47.4 | 10.500          | -154.8 | 0.039           | 39.1 | 0.366           | -133.1 | 1.14 |
| 2200.0000        | 0.254           | -51.6 | 9.815           | -161.7 | 0.040           | 41.4 | 0.356           | -138.0 | 1.20 |
| 2300.0000        | 0.237           | -57.1 | 9.168           | -168.0 | 0.041           | 43.7 | 0.342           | -142.8 | 1.28 |
| 2400.0000        | 0.221           | -61.1 | 8.570           | -173.7 | 0.041           | 48.3 | 0.325           | -148.3 | 1.37 |
| 2500.0000        | 0.212           | -68.8 | 7.967           | -179.7 | 0.042           | 48.3 | 0.322           | -152.6 | 1.44 |
| 2600.0000        | 0.208           | -72.2 | 7.507           | -174.9 | 0.043           | 50.8 | 0.314           | -156.7 | 1.49 |
| 2700.0000        | 0.202           | -74.1 | 7.004           | -170.0 | 0.045           | 53.7 | 0.309           | -160.1 | 1.53 |
| 2800.0000        | 0.190           | -76.3 | 6.667           | -164.7 | 0.047           | 54.2 | 0.303           | -164.0 | 1.56 |
| 2900.0000        | 0.178           | -76.7 | 6.336           | -160.7 | 0.051           | 57.7 | 0.292           | -167.8 | 1.55 |
| 3000.0000        | 0.154           | -82.3 | 6.003           | -155.6 | 0.051           | 56.5 | 0.287           | -172.8 | 1.62 |
| 3100.0000        | 0.147           | -88.0 | 5.772           | -151.3 | 0.054           | 59.3 | 0.279           | -176.4 | 1.61 |



★ PACKAGE DIMENSIONS

6-PIN SUPER MINIMOLD (UNIT: mm)

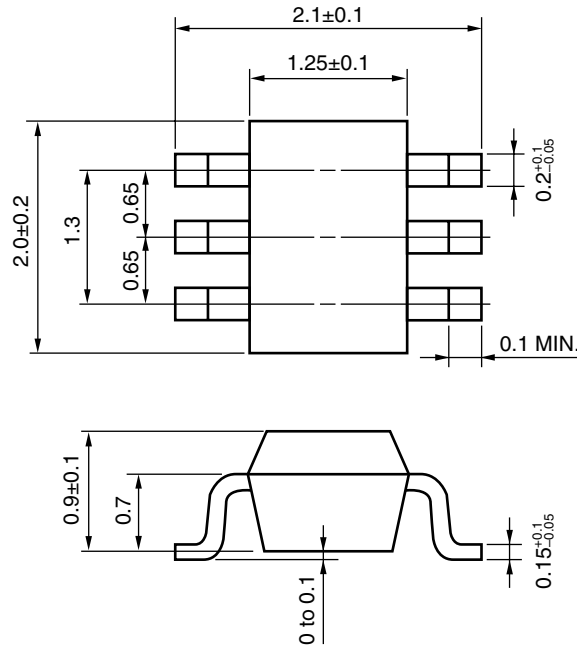

**NOTES ON CORRECT USE**

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as wide as possible to minimize ground impedance (to prevent undesired oscillation). All the ground pins must be connected together with wide ground pattern to decrease impedance difference.
- (3) The bypass capacitor should be attached to the Vcc pin.
- (4) The inductor must be attached between Vcc and output pins. The inductance value should be determined in accordance with desired frequency.
- (5) The DC cut capacitor must be attached to input pin.

**RECOMMENDED SOLDERING CONDITIONS**

This product should be soldered under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your NEC sales representative.


| Soldering Method | Soldering Conditions  | Recommended Condition Symbol |
|------------------|---|------------------------------|
| Infrared Reflow  | Package peak temperature: 235°C or below<br>Time: 30 seconds or less (at 210°C)<br>Count: 3, Exposure limit: None <sup>Note</sup> | IR35-00-3                    |
| VPS              | Package peak temperature: 215°C or below<br>Time: 40 seconds or less (at 200°C)<br>Count: 3, Exposure limit: None <sup>Note</sup> | VP15-00-3                    |
| Wave Soldering   | Soldering bath temperature: 260°C or below<br>Time: 10 seconds or less<br>Count: 1, Exposure limit: None <sup>Note</sup>          | WS60-00-1                    |
| Partial Heating  | Pin temperature: 300°C or below<br>Time: 3 seconds or less (per side of device)<br>Exposure limit: None <sup>Note</sup>           | —                            |

**Note** After opening the dry pack, keep it in a place below 25°C and 65% RH for the allowable storage period.

**Caution** Do not use different soldering methods together (except for partial heating).

For details of recommended soldering conditions for surface mounting, refer to information document **SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL (C10535E)**.

[MEMO]



**ATTENTION**

OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES

**NESAT (NEC Silicon Advanced Technology) is a trademark of NEC Corporation.**

- **The information in this document is current as of February, 2001. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
  - No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
  - NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
  - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
  - While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
  - NEC semiconductor products are classified into the following three quality grades:  
"Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
    - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
    - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
    - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
- (Note)
- (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
  - (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).