INTEGRATED CIRCUITS



Product specification Supersedes data of 1997 Jun 19 IC24 Data Handbook

1998 Apr 28



Philips Semiconductors



74LVC139

FEATURES

- Wide supply voltage range of 1.2 to 3.6 V
- In accordance with JEDEC standard no. 8-1A
- Inputs accept voltages up to 5.5 V
- CMOS lower power consumption
- Direct interface with TTL levels
- Demultiplexing capability
- Two independent 2-to-4 decoders
- Multifunction capability
- Active LOW mutually exclusive outputs
- Output drive capability 50 Ω transmission lines at 85°C

QUICK REFERENCE DATA

GND = 0 V; $T_{amb} = 25^{\circ}C$; $t_r = t_f \le 2.5 \text{ ns}$

DESCRIPTION

The 74LVC139 is a low-voltage, low-power, high-performance Si-gate CMOS device, superior to most advanced CMOS compatible TTL families.

The 74LVC139 is a dual 2-to-4 line decoder/demultiplexer. This device has two independent decoders, each accepting two binary weighted inputs (nA₀ and nA₁) and providing four mutually exclusive active LOW outputs (n \overline{Y}_0 to n \overline{Y}_3). Each decoder has an active LOW input (nE).

When $n\overline{E}$ is HIGH, every output is forced HIGH. The enable can be used as the data input for a 1-to-4 demultiplexer application.

SYMBOL	PARAMETER	CONDITIONS	TYPICAL	UNIT
t _{PHL} /t _{PLH}	Propagation delay nA to $n\overline{Y}_n$, nE to $n\overline{Y}_n$,	$C_L = 50 \text{ pF};$ $V_{CC} = 3.3 \text{ V}$	3.3 3.2	ns
Cl	Input capacitance		5.0	pF
C _{PD}	Power dissipation capacitance per multiplexer	$V_{CC} = 3.3 V$ Notes 1 and 2	36	pF

NOTES:

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μ W) P_D = C_{PD} × V_{CC}² × f_i + \sum (C_L × V_{CC}² × f_o) where: f_i = input frequency in MHz; C_L = output load capacity in pF; f_o = output frequency in MHz; V_{CC} = supply voltage in V; \sum (C_L × V_{CC}² × f_o) = sum of the outputs.

2. The condition is $V_1 = GND$ to V_{CC}

ORDERING INFORMATION

PACKAGES	TEMPERATURE RANGE	OUTSIDE NORTH AMERICA	NORTH AMERICA	PKG. DWG. #
16-Pin Plastic SO	–40°C to +85°C	74LVC139 D	74LVC139 D	SOT109-1
16-Pin Plastic SSOP Type II	–40°C to +85°C	74LVC139 DB	74LVC139 DB	SOT338-1
16-Pin Plastic TSSOP Type I	–40°C to +85°C	74LVC139 PW	74LVC139PW DH	SOT403-1

PIN CONFIGURATION

$1\overline{E} \begin{bmatrix} 1\\ \\ 1A_0 \end{bmatrix} 2$ $1A_1 \end{bmatrix} 3$ $1\overline{Y}_0 \end{bmatrix} 4$ $1\overline{Y}_1 \end{bmatrix} 5$ $1\overline{Y}_2 \end{bmatrix} 6$ $1\overline{Y}_3 \boxed{7}$ $0 UD \end{bmatrix} 8$	16 Vcc 15 2E 14 2A ₀ 13 2A ₁ 9 2V ₀ 10 2V ₁ 11 2V ₂	
GND 8	12 ₂ 7 ₃	SV00530

PIN DESCRIPTION


PIN NUMBER	SYMBOL	NAME AND FUNCTION
1, 15	1Ē, 2Ē	Enable inputs (active LOW)
2, 3	1A ₀ , 1A ₁	Address inputs
14, 13	2A ₀ , 2A ₁	
4, 5, 6, 7	$1\overline{Y}_0$ to $1\overline{Y}_3$	Outputs (active LOW)
12, 11, 10, 9	$2\overline{Y}_0$ to $2\overline{Y}_3$	
8	GND	Ground (0 V)
16	V _{CC}	Positive supply voltage

74LVC139

4

1**7**0


LOGIC DIAGRAM



$1A_0$ 1**7**₁ 2 5 DECODER 1A₁ 17₂ 3 6 173 7 1Ē 1 - $\overline{2Y}_0$ - 12 1A₀ 14 $2Y_1$ 11 2A₁ DECODER 13 $\overline{2Y}_2$ 10 <u>2</u>73 9 2Ē 15 SV00534

FUNCTIONAL DIAGRAM

LOGIC SYMBOL (IEEE/IEC)



FUNCTION TABLE

INPUTS				OUTF	PUTS	
nĒ	nA ₀	nA ₁	n₹₀	n <mark></mark> ₹1	n₹2	n₹3
Н	Х	Х	Н	Н	Н	Н
L	L	L	L	Н	Н	Н
L	н	L	н	L	Н	н
L	L	н	н	н	L	н
L	н	Н	Н	Н	Н	L

NOTES:

H = HIGH voltage level

L = LOW voltage level

X = don't care

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	CONDITIONS	LIM	UNIT	
		CONDITIONS	MIN	MAX	UNIT
V.	DC supply voltage (for max. speed performance)		2.7	3.6	V
V _{CC} DC supply voltage (for low-voltage applications)			1.2	3.6	v
VI	DC input voltage range		0	5.5	V
Vo	DC output voltage range		0	V _{CC}	V
T _{amb}	Operating free-air temperature range in free air		-40	+85	°C
t _r , t _f	Input rise and fall times	$V_{CC} = 1.2 \text{ to } 2.7 \text{V}$ $V_{CC} = 2.7 \text{ to } 3.6 \text{V}$	0	20 10	ns/V

ABSOLUTE MAXIMUM RATINGS¹

In accordance with the Absolute Maximum Rating System (IEC 134).

Voltages are referenced to GND (ground = 0V).

SYMBOL	PARAMETER	CONDITIONS	RATING	UNIT
V _{CC}	DC supply voltage		-0.5 to +6.5	V
I _{IK}	DC input diode current	V ₁ < 0	-50	mA
VI	DC input voltage	Note 2	-0.5 to +5.5	V
I _{OK}	DC output diode current	$V_{O} > V_{CC} \text{ or } V_{O} < 0$		mA
V _O	DC output voltage	Note 2	–0.5 to V _{CC} +0.5	V
Ι _Ο	DC output source or sink current	$V_{O} = 0$ to V_{CC}	± 50	mA
I _{GND} , I _{CC}	DC V _{CC} or GND current		±100	mA
T _{stg}	Storage temperature range		-65 to +150	°C
P _{TOT}	Power dissipation per package – plastic mini-pack (SO) – plastic shrink mini-pack (SSOP and TSSOP)	above +70°C derate linearly with 8 mW/K above +60°C derate linearly with 5.5 mW/K	500 500	mW

NOTES:

1. Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

74LVC139

DC ELECTRICAL CHARACTERISTICS

Over recommended operating conditions. Voltages are referenced to GND (ground = 0V)

			L	LIMITS			
SYMBOL	PARAMETER TEST CONDITIONS		Temp = -40°C to +85°C				
			MIN	TYP ¹	МАХ	1	
Maria		$V_{CC} = 1.2V$	V _{CC}			v	
V _{IH}	HIGH level input voltage	V _{CC} = 2.7 to 3.6V	2.0] `	
M		$V_{CC} = 1.2V$			GND	v	
V_{IL}	LOW level input voltage	V _{CC} = 2.7 to 3.6V			0.8	1 `	
	HIGH level output voltage	$V_{CC} = 2.7V; V_I = V_{IH} \text{ or } V_{IL}; I_O = -12mA$	V _{CC} -0.5				
		$V_{CC} = 3.0V; V_I = V_{IH} \text{ or } V_{IL}; I_O = -100 \mu A$	V _{CC} -0.2	V _{CC}			
V _{OH}		$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = -12mA$	V _{CC} -0.6] `	
		$V_{CC} = 3.0V$; $V_I = V_{IH}$ or V_{IL} ; $I_O = -24mA$	V _{CC} -0.8				
		$V_{CC} = 2.7V; V_I = V_{IH} \text{ or } V_{IL}; I_O = 12\text{mA}$			0.40		
V _{OL}	LOW level output voltage	$V_{CC} = 3.0V; V_I = V_{IH} \text{ or } V_{IL}; I_O = 100 \mu A$			0.20	V	
		$V_{CC} = 3.0V; V_I = V_{IH} \text{ or } V_{IL;} I_O = 24\text{mA}$			0.55	1	
t _l	Input leakage current	$V_{CC} = 3.6V; V_{I} = 5.5V \text{ or GND}$		±0.1	±5	μΑ	
I _{CC}	Quiescent supply current	$V_{CC} = 3.6V; V_I = V_{CC} \text{ or GND}; I_O = 0$		0.1	10	μΑ	
ΔI_{CC}	Additional quiescent supply current per input pin	V_{CC} = 2.7V to 3.6V; V_{I} = V_{CC} –0.6V; I_{O} = 0		5	500	μΑ	

NOTE:

1. All typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.

AC CHARACTERISTICS

GND = 0 V; t_r = t_f $\leq~$ 2.5 ns; CL = 50 pF; RL = 500 $\Omega;$ T_amb = -40°C to +85°C

					LIMITS			
SYMBOL	PARAMETER	WAVEFORM	Vco	_C = 3.3V ±0.	.3V	V _{CC} =	: 2.7V	UNIT
			MIN	TYP ¹	MAX	MIN	MAX	
t _{PHL} /t _{PLH}	Propagation delay nA_n to \overline{Y}_n	1, 3	1.5	3.3	6.0		7.5	ns
t _{PHL} /t _{PLH}	Propagation delay $n\overline{E}$ to \overline{Y}_n	2, 3	1.5	3.2	5.5		6.5	ns

NOTE:

1. These typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.

74LVC139

AC WAVEFORMS

 V_M = 1.5 V at $V_{CC} \geq 2.7$ V V_M = 0.5 \times V_{CC} at V_{CC} < 2.7 V V_{OL} and V_{OH} are the typical output voltage drop that occur with the output load.




Figure 1. Input (nA) to output (nY) propagation delays.




Figure 2. Enable input (\overline{nE}) to output (\overline{nYn}) propagation delays.

TEST CIRCUIT





Figure 3. Load circuitry for switching times.

SO16:

Dual 2-to-4 line decoder/demultiplexer


plastic small outline package; 16 leads; body width 3.9 mm

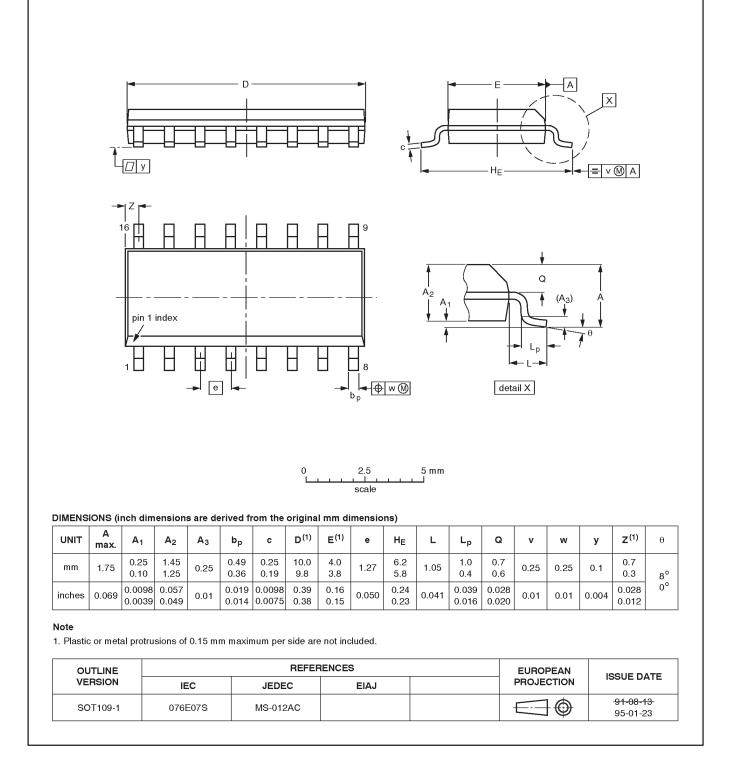


74LVC139

SOT109-1

74LVC139

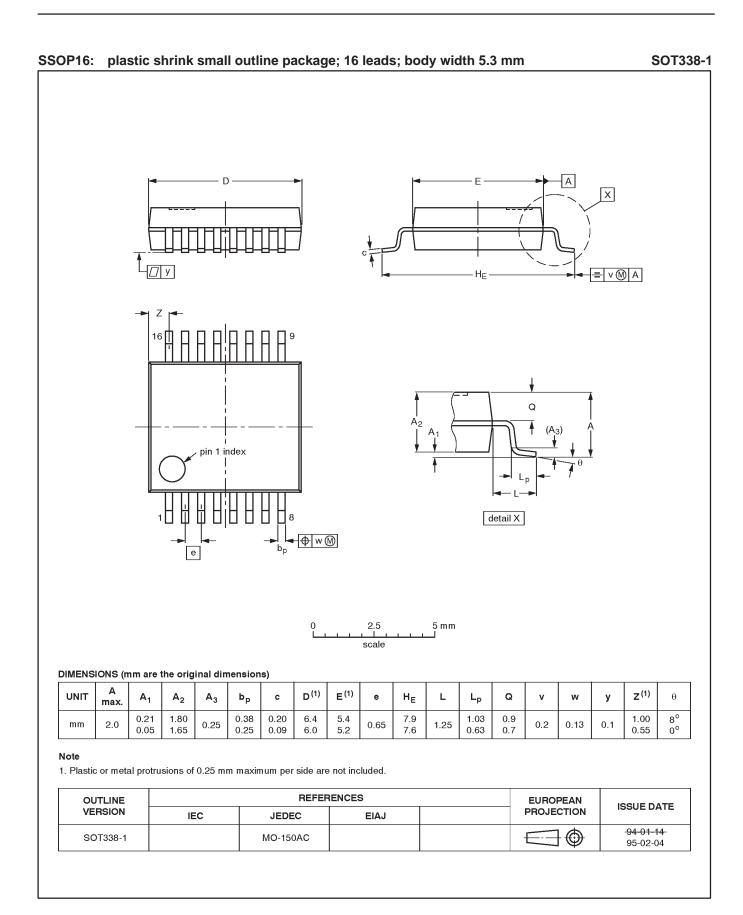

74LVC139

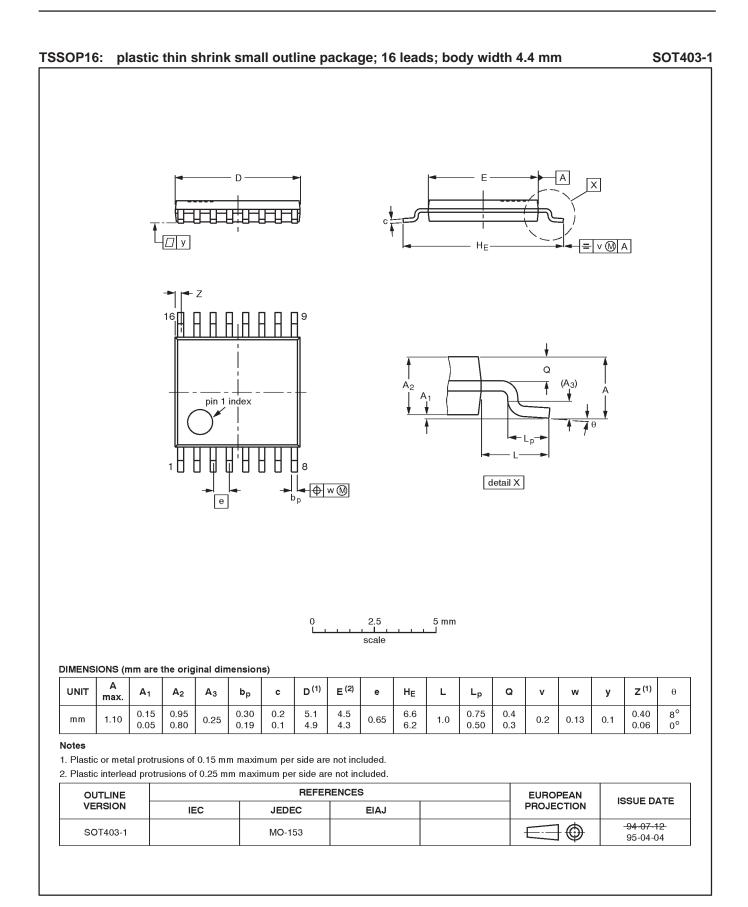

1998 Apr 28 Downloaded from <u>Elcodis.com</u> electronic components distributor

74LVC139

DEFINITIONS					
Data Sheet Identification Product Status Definition					
Objective Specification	Formative or in Design	This data sheet contains the design target or goal specifications for product development. Specifications may change in any manner without notice.			
Preliminary Specification Preproduction Product Semiconductors re-		This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.			
Product Specification	Full Production	This data sheet contains Final Specifications. Philips Semiconductors reserves the right to make changes at any time without notice, in order to improve design and supply the best possible product.			

Philips Semiconductors and Philips Electronics North America Corporation reserve the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified. Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

LIFE SUPPORT APPLICATIONS

Philips Semiconductors and Philips Electronics North America Corporation Products are not designed for use in life support appliances, devices, or systems where malfunction of a Philips Semiconductors and Philips Electronics North America Corporation Product can reasonably be expected to result in a personal injury. Philips Semiconductors and Philips Electronics North America Corporation customers using or selling Philips Semiconductors and Philips Electronics North America Corporation Products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors and Philips Electronics North America Corporation for any damages resulting from such improper use or sale.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 1998 All rights reserved. Printed in U.S.A.

print code

Document order number:

Date of release: 05-96 9397-750-04494

Let's make things better.



PHILIPS

Semiconductors

Philips