

## Model

# PAM250

250 Watts<sub>max</sub> output power

Power Factor Correction

Single Output

## Switch Mode Power Supply




Medical Grade  
Certifications

H.A.L.T.  
TESTED

Highly  
Accelerated  
Life  
Testing

### Electrical Specifications

Input Voltage:	85-132/180-264 VAC, 47-63 Hz, 1 phase
Input Current:	<6A RMS @ 115 VAC @ full load <3A RMS @ 230 VAC @ full load
Inrush Current:	<35A, pk @ 265 VAC @ cold start <75A, pk @ 132 VAC @ cold start
Harmonic Distortion:	Meets EN61000-3-2 for Class A
EMI Filtering:	Meets CISPR 11 and 22 and FCC Part 15 Class B (conducted)
Input Protection:	Internal AC line fuse; 250 VAC, 8A
Surge Withstand:	Meets EN61000-4-5 Level 3
Output Power:	250W with 25CFM air; 130W Convection
Line Regulation:	± 0.3%
Load Regulation:	± 0.5%
PARD:	<1% or 50mV; 20MHz bandwidth
Hold-up Time:	16 ms @ full load (120 VAC)
Output Polarity:	Output is floating
Minimum Load:	0% of rated load
Transient Response:	3% for 25% load change @ 1A/μs; 50% duty cycle 50/60 Hz
Output Rise Time:	<100 ms (10% to 90%)
Current Limit:	105-130% of rated current; Hiccup
Remote Sense:	Compensates for up to 250mV of total cable drop
Remote On/Off:	Optional
Leakage Current:	< 300 μA

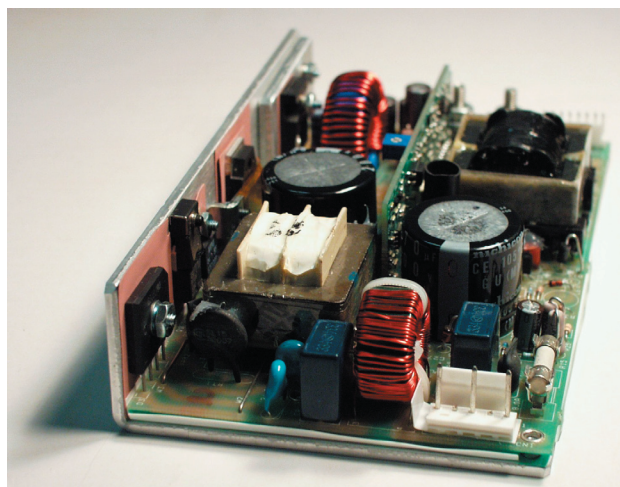

Thermal Shutdown	Standard
DC OK:	Standard; Open Collector
Turn-on Delay:	<1 second after application of AC Input
Stability:	<0.1% for 8 hours after 1/2-hour warm up
Isolation:	>20 MΩ @ 100 VDC between output terminals and chassis ground
AC Power Fail:	TTL <sub>LOW</sub> logic "0" at least 2 ms before output drops 5%; Open collector
Oversvoltage Protect:	Factory set, 125% ±5%, cycle AC to reset
Reverse Voltage:	Output has reverse voltage protection; Reverse current limited to 100% of output rating
Efficiency:	Up to 85%
MTBF:	MIL-STD-HDBK 217E >200,000 hours @ 25°C Highly Accelerated Life Testing

### Available Voltage Outputs\*

Voltage Codes	Voltages (Volts)	Continuous Current (Amps)
<b>-4</b>	<b>12.0</b>	<b>21</b>
<b>-5</b>	<b>15.0</b>	<b>17</b>
<b>-6</b>	<b>24.0</b>	<b>10.5</b>
-7	28.0	9.0
-8	36.0	7.2
<b>-9</b>	<b>48.0</b>	<b>5.5</b>

\* Consult factory for other voltages and OEM quantities.

Note: Standard models are shown **bold**

### PART # STRUCTURE:

MODEL - VOLTAGE CODE - OPTION CODES (See sheet 2)

PAM250 - V1 - ABC....  
PAM250 - X - ABC....

Example: Part Number **PAM250-6-OR**= 250W Power Factor Corrected, 24V @ 10.5A with an OR-ring Diode and Remote On/Off.

[CLICK HERE TO SEE THE PAM250 CODE TABLE AND AVAILABLE OPTIONS.](#)

Model

## PAM250

### Options (code)

12V@0.5A Aux./Fan Drive (A) Droop Current Share  $\pm 10\%$  (B)  
 Fan Assembly (C) DC OK Invert (E)  
 PF Invert (F) Field-Configurable (G)  
 Single Wire Current Share  $\pm 5\%$  (I) Square Current Limit (J)  
 Molex Connector (K) Metric Mounting (M)  
 OR-ing Diode (O) Remote On/Off (R)  
 Remote On/Off Invert (S)

### Certifications

NRTL \*\*\* Recognition to UL60601-1  
 CSA C22.2 No. 601-01  
 BAUART Certification to EN60601-1  
 CB Test Report in Accordance with IEC60601-1  
 CE Declaration to Low Voltage Directive 72/23/EEC

\*\*\* Nationally Recognized Test Laboratory




### Compliance

EN61000-4-5 Level 3 EN61000-4-2 Level 2  
 EN61000-3-2 for Class A EN61000-4-2 Level 3 (Air Only)  
 EN61000-4-4 Level 3 EN61000-4-11  
 CISPR 11 and 22 FCC Part 15 Class B (conducted)

### Physical Specifications

Dimensions: (HxWxL) 1.5" x 4.0" x 7"  
 Operating Temp: 0 to 70°C; rated power to 50°C  
 derate linearly to 50% at 70°C.  
 Relative Humidity: 5% to 90%, non-condensing  
 Storage: -50 to 85°C/20-90% RH  
 Altitude: 10,000' operating;  
 40,000' storage

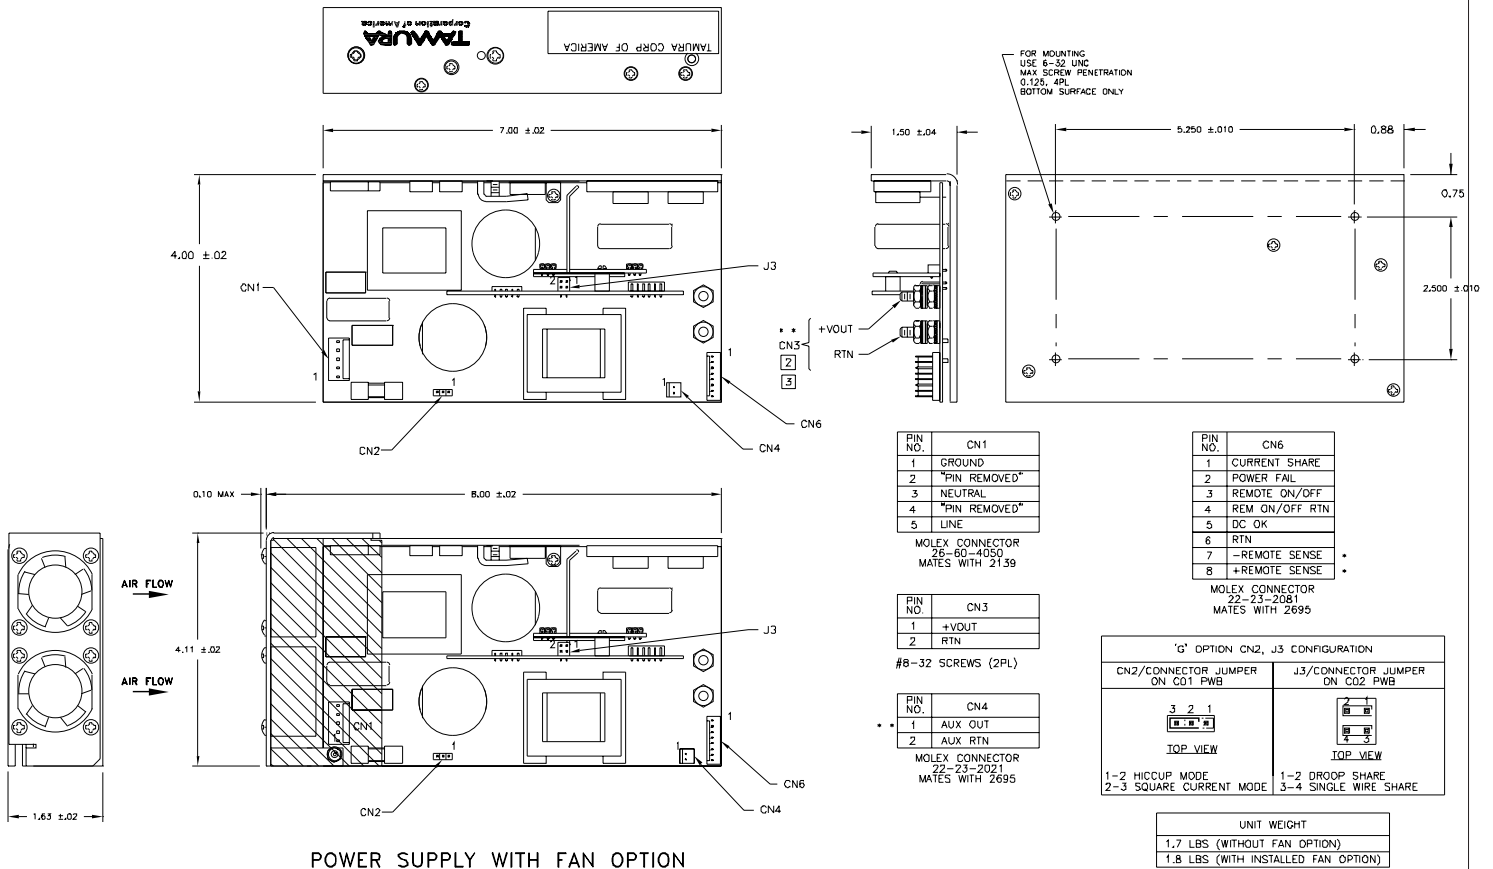

[3] OPTIONAL—MOLEX CONNECTOR (OPTION 'K'—LIMITED TO 7A) MAY BE SPECIFIED FOR CN3 INSTEAD OF STANDARD OUTPUT STUDS.  
 [2] DO NOT EXCEED 17 INCH-LBS (MAX TORQUE) WHEN TIGHTENING TOP NUTS ON OUTPUT STUDS.  
 1. FOR CLARITY NOT ALL ITEMS ARE SHOWN IN EACH VIEW.

\* **WARNING:** DAMAGE WILL OCCUR IF REMOTE SENSE LEADS (CN6-7 & CN6-8) ARE REVERSED OR USED WITH LOAD DISCONNECTED FROM OUTPUT (CN3).  
 \*\* **NOTE:** FOR PROPER REGULATION OF AUXILIARY OUTPUT, APPLY AT LEAST 10% OF RATED LOAD TO VOUT.

© Copyright 2006 TAMURA CORPORATION OF AMERICA. Specifications subject to change without notice.



TAMURA CORPORATION OF AMERICA  
 43352 Business Park Drive, Temecula, CA 92590-6624  
 (951) 699-1270 / Fax: (951) 676-9482  
 (800) 472-6624 www.tamuracorp.com



FM 32227