

W83194BR-903 & W83194BG-903 STEPLESS VIA PT/PM MAIN CLOCK GENERATOR

Date: 5/2/2006 Revision: 1.0

W83194BR-903/W83194BG-903



W83194BR-903 Datasheet Revision History

| | PAGES | DATES | VERSION | WEB VERSION | MAIN CONTENTS |
|----|--------|----------|---------|-------------|--|
| 1 | n.a. | | | n.a. | All of the versions before 0.50 are for internal use. |
| 2 | n.a. | 09/07/03 | 0.5 | n.a. | First published preliminary version. |
| 3 | 6 | 10/28/03 | 0.6 | n.a. | Modify frequency table |
| 4 | 7,9,19 | 12/18/03 | 0.7 | n.a. | Correction IC version, correction some description and default value |
| 5 | | 05/02/06 | 1.0 | 1.0 | Update on Web and add lead free part |
| 6 | | | | | |
| 7 | | | | | |
| 8 | | | | | |
| 9 | | | | | |
| 10 | | | | | |

Table of Contents-

| | | |
|------|---|----|
| 1. | GENERAL DESCRIPTION | 1 |
| 2. | PRODUCT FEATURES | 1 |
| 3. | PIN CONFIGURATION | 2 |
| 4. | BLOCK DIAGRAM | 2 |
| 5. | PIN DESCRIPTION | 3 |
| 5.1 | Crystal I/O | 3 |
| 5.2 | CPU, AGP, and PCI Clock Outputs | 3 |
| 5.3 | Fixed Frequency Outputs | 4 |
| 5.4 | I ² C Control Interface | 4 |
| 5.5 | Power Management Pins | 5 |
| 5.6 | IREF selects Function | 5 |
| 5.7 | Power Pins | 5 |
| 6. | FREQUENCY SELECTION BY HARDWARE OR SOFTWARE | 6 |
| 7. | I ² C CONTROL AND STATUS REGISTERS | 7 |
| 7.1 | Register 0: Frequency Select (Default = 10h) | 7 |
| 7.2 | Register 1: CPU Clock (1 = Enable, 0 = Stopped) (Default: E2h) | 7 |
| 7.3 | Register 2: PCI Clock (1 = Enable, 0 = Stopped) (Default: FFh) | 8 |
| 7.4 | Register 3: PCI, AGP Clock (1 = Enable, 0 = Stopped) (Default: FFh) | 8 |
| 7.5 | Register 4: 24_48MHz, 48MHz, REF, 25MHz Control (1 = Enable, 0 = Stopped) (Default: BFh) .. | 8 |
| 7.6 | Register 5: Watchdog Control (Default: 02h) | 9 |
| 7.7 | Register 6: Reserved (Default: 50h) (Read Only) | 9 |
| 7.8 | Register 7: Winbond Chip ID (Default: 70h) (Read Only) | 10 |
| 7.9 | Register 8: M/N Program (Default: 90h) | 10 |
| 7.10 | Register 9: M/N Program (Default: 7Ah) | 10 |
| 7.11 | Register 10: M/N Program (Default: BBh) | 11 |
| 7.12 | Register 11: Spread Spectrum Programming (Default: 0Bh) | 11 |
| 7.13 | Register 12: Divisor and Step-less Enable Control (Default: FBh) | 11 |
| 7.14 | Register 13: Divisor and Step-less Enable Control (Default: 0Fh) | 12 |
| 7.15 | Register 14: Control (Default: 0Ah) | 12 |
| 7.16 | Register 15: SST & Skew Control (Default: 2Ch) | 13 |
| 7.17 | Register 16: Skew Control (Default: 24h) | 13 |
| 7.18 | Register 17: Slew rate Control (Default: 00h) | 13 |
| 7.19 | Register 18: Slew rate Control (Default: 00h) | 14 |
| 7.20 | Register 19: Slew rate Control (Default: D2h) | 14 |

W83194BR-903/W83194BG-903



| | |
|---|----|
| 7.21 Register 20: Watch dog timer (Default: 08h)..... | 14 |
| 7.22 Register21: Fix Mode Control (Default: 00h)..... | 15 |
| 8. ACCESS INTERFACE..... | 16 |
| 8.1 Block Write protocol | 16 |
| 8.2 Block Read protocol..... | 16 |
| 8.3 Byte Write protocol..... | 16 |
| 8.4 Byte Read protocol..... | 16 |
| 9. SPECIFICATIONS..... | 17 |
| 9.1 ABSOLUTE MAXIMUM RATINGS | 17 |
| 9.2 General Operating Characteristics | 17 |
| 9.3 Skew Group timing clock | 18 |
| 9.4 CPU 0.7V Electrical Characteristics | 18 |
| 9.5 AGP Electrical Characteristics | 18 |
| 9.6 PCI Electrical Characteristics..... | 19 |
| 9.7 24M, 48M Electrical Characteristics | 19 |
| 9.8 REF Electrical Characteristics | 19 |
| 10. ORDERING INFORMATION | 20 |
| 11. HOW TO READ THE TOP MARKING | 20 |
| 12. PACKAGE DRAWING AND DIMENSIONS | 21 |

W83194BR-903/W83194BG-903



1. GENERAL DESCRIPTION

The W83194BR-903 is a Clock Synthesizer for VIA PT880/PM880 chipset. W83194BR-903 provides all clocks required for high-speed microprocessor and provides step-less frequency programming and 32 different frequencies of CPU, PCI, and AGP clocks setting, support two 25MHz clock outputs, all clocks are externally selectable with smooth transitions.

The W83194BR-903 provides I²C serial bus interface to program the registers to enable or disable each clock outputs and provides -0.5% and +/-0.25% center type spread spectrum or programmable S.S.T. scale to reduce EMI.

The W83194BR-903 also has watchdog timer and reset output pin to support auto-reset when systems hanging caused by improper frequency setting.

The W83194BR-903 accepts a 14.318 MHz reference crystal as its input and runs on a 3.3V supply.

2. PRODUCT FEATURES

- 3 0.7V current-mode Differential pairs clock outputs
- 2 2.5V 25MHz clock outputs
- 3 AGP clock outputs
- 10 PCI synchronous clocks
- 1 24_48Mhz clock output for super I/O.
- 1 48 MHz clock output for USB.
- 2 14.318MHz REF clock outputs.
- AGP/PCI clock out supports synchronous and asynchronous mode
- Smooth frequency switch with selections from 100 to 400MHz
- Step-less frequency programming
- I²C 2-Wire serial interface and support byte read/write and block read/write.
- -0.5% and +/- 0.25% center type spread spectrum
- Programmable S.S.T. scale to reduce EMI
- Programmable registers to enable/stop each output and select modes
- Programmable clock outputs Slew rate control and Skew control
- Watch Dog Timer and RESET# output pins
- 48-pin SSOP package

W83194BR-903/W83194BG-903



3. PIN CONFIGURATION


| | | | |
|---------------------|----|----|----------------|
| FS1*/REF0 | 1 | 48 | VDDA |
| FS0*/REF1 | 2 | 47 | GND |
| VDDREF | 3 | 46 | IREF |
| XIN | 4 | 45 | CPUT_I1P |
| XOUT | 5 | 44 | CPUC_I1P |
| GND | 6 | 43 | GND |
| FS2*/PCL_F0 | 7 | 42 | CPUT1 |
| FS4*/PCL_F1 | 8 | 41 | CPUC1 |
| PCL_F2 | 9 | 40 | VDDCPU |
| VDDPCI | 10 | 39 | CPUT0 |
| GND | 11 | 38 | CPUC0 |
| MODE*/PCI0 | 12 | 37 | GND |
| PCI1 | 13 | 36 | 25MHz_0 |
| PCI2 | 14 | 35 | 25MHz_1 |
| PCI3 | 15 | 34 | VDD2.5 |
| PCI4 | 16 | 33 | VTT_PWRGD/PD#* |
| VDDPCI | 17 | 32 | SDATA* |
| GND | 18 | 31 | SCLK* |
| PCL_STOP**/PCI5 | 19 | 30 | RESET# |
| CPU_STOP**/PCI6 | 20 | 29 | AGP_0 |
| FS3*/48MHz | 21 | 28 | GND |
| SEL24_48#*/24_48MHz | 22 | 27 | VDDAGP |
| GND | 23 | 26 | AGP_1 |
| VDD48 | 24 | 25 | AGP_2 |

#: Active low

*: Internal pull up resistor 120K to VDD

&: Internal Pull-down resistor 120K to GND

4. BLOCK DIAGRAM

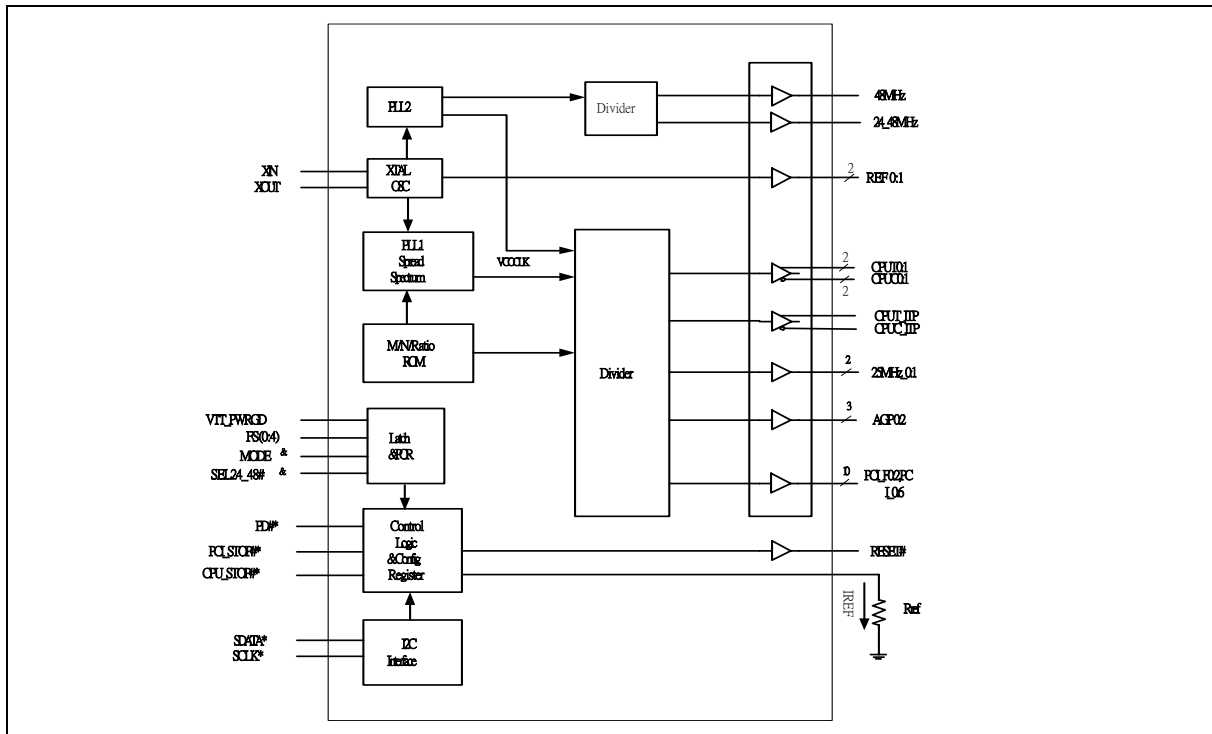

W83194BR-903/W83194BG-903



5. PIN DESCRIPTION

| BUFFER TYPE SYMBOL | DESCRIPTION |
|----------------------|--|
| IN | Input |
| IN _{tp120k} | Latched input at power up, internal 120kΩ pull up. |
| IN _{td120k} | Latched input at power up, internal 120kΩ pull down. |
| OUT | Output |
| OD | Open Drain |
| I/OD | Bi-directional Pin, Open Drain. |
| # | Active Low |
| * | Internal 120kΩ pull-up |
| & | Internal 120 kΩ pull-down |

5.1 Crystal I/O

| PIN | PIN NAME | TYPE | DESCRIPTION |
|-----|----------|------|--|
| 4 | XIN | IN | Crystal input with internal loading capacitors (18pF) and feedback resistors. |
| 5 | XOUT | OUT | Crystal output at 14.318MHz nominally with internal loading capacitors (18pF). |

5.2 CPU, AGP, and PCI Clock Outputs

| PIN | PIN NAME | TYPE | DESCRIPTION |
|-------------|--------------------------|----------------------|---|
| 42,39,41,38 | CPUT [0:1] CPUC [0:1] | OUT | Low skew (< 250ps) differential clock outputs for host frequencies of CPU |
| 45,44 | CPUT_ITP, CPUC_ITP | OUT | Differential clock outputs for host frequencies of CPU |
| 29,26,25 | AGP0: 2 | OUT | 3.3V AGP clock outputs. |
| 7 | PCI_F0 | OUT | 3.3V PCI free running clock output. |
| | FS2 ^{&} | IN _{td120k} | Latched input for FS2 at initial power up for H/W selecting the output frequency. This is internal 120K pull down. |
| 8 | PCI_F1 | OUT | 3.3V PCI free running clock output. |
| | FS4 ^{&} | IN _{td120k} | Latched input for FS4 at initial power up for H/W selecting the output frequency, This is internal 120K pull down. |
| 12 | PCI0 | OUT | 3.3V PCI clock output. |
| | MODE ^{&} | IN _{td120k} | Latched input for pin 19,20 at initial power up selecting the 0=PCI5, PCI6 clock output, 1=PCI_STOP and CPU_STOP control pin. This is internal 120KΩ pull down. |

W83194BR-903/W83194BG-903



CPU, AGP, and PCI Clock Outputs, continued.

| PIN | PIN NAME | TYPE | DESCRIPTION |
|-------------|------------|----------------------|--|
| 9 | PCI_F2 | OUT | 3.3V PCI free running clock output. |
| 19 | PCI5 | OUT | 3.3V PCI clock output. Select by pin 12 MODE ^{&} power up initial =0. |
| | PCI_STOP#* | IN _{tp120k} | Active low, Stop all PCI clock output besides the free running clocks. Select by pin 12 MODE ^{&} power up initial =1. |
| 20 | PCI6 | OUT | 3.3V PCI clock output. Select by pin 12 MODE ^{&} power up initial =0. |
| | CPU_STOP#* | IN _{tp120k} | Active low, Stop all CPU clock outputs. Select by pin 12 MODE ^{&} power up initial =1. |
| 13,14,15,16 | PCI [1:4] | OUT | Low skew (< 250ps) PCI clock outputs. |

5.3 Fixed Frequency Outputs

| PIN | PIN NAME | TYPE | DESCRIPTION |
|-------|----------------------------|----------------------|---|
| 1 | REF0 | OUT | 14.318MHz output. |
| | FS1* | IN _{tp120k} | Latched input for FS1 at initial power up for H/W selecting the output frequency. This is internal 120K pull up. |
| 2 | REF1 | OUT | 14.318MHz output. |
| | FS0 ^{&} | IN _{td120k} | Latched input for FS0 at initial power up for H/W selecting the output frequency. This is internal 120K pull down. |
| 21 | 48MHz | OUT | 48MHz clock output for USB. |
| | FS3 ^{&} | IN _{td120k} | Latched input for FS3 at initial power up for H/W selecting the output frequency. This is internal 120K pull down. |
| 22 | 24_48MHz | OUT | 24MHz or 48MHz(default) clock output, In power on reset period, it is a hardware-latched pin, and it can be R/W by I2C control after power on reset period. Select by register 5 bit 7. |
| | SEL24_48# ^{&} | IN _{td120k} | Latched input for 24MHz or 48MHz select pin. This is internal 120K pull down default 48MHz. In power on reset period, it is a hardware-latched pin, and it can be R/W by I2C control after power on reset period. Select by register 5 bit 7. |
| 36,35 | 25MHz_[0:1] | OUT | 25MHz 2.5V push pull clock output. |

5.4 I²C Control Interface

| PIN | PIN NAME | TYPE | DESCRIPTION |
|-----|----------|----------------------|--|
| 32 | SDATA* | I/OD | Serial data of I ² C 2-wire control interface with internal 120K pull-up resistor. |
| 31 | SCLK* | IN _{tp120k} | Serial clock of I ² C 2-wire control interface with internal 120K pull-up resistor. |

W83194BR-903/W83194BG-903



5.5 Power Management Pins

| PIN | PIN NAME | TYPE | DESCRIPTION |
|-----|-----------|----------------------|---|
| 33 | VTT_PWRGD | IN | Power good input signal is power on trapping with HIGH active. This 3.3V input is level sensitive strobe used to determine FS [4:0]. This pin is HIGH active. |
| | PD#* | IN _{tp120k} | Power Down Function. This is power down pin, low active (PD#). Internal 120K pull up |
| 46 | IREF | OUT | Deciding the reference current for the CPUCLK pairs. The pin was connected to the precision resistor tied to ground to decide the appropriate current. |
| 30 | RESET# | OD | System reset signal when the watchdog is time out. This pin will generate 250ms low phase when the watchdog timer is timeout. |

5.6 IREF selects Function

| BOARD TARGET TRACE/TERM Z | REFERENCE R, IREF = ADD/(3*RR) | OUTPUT CURRENT | VOH @ Z |
|---------------------------|--------------------------------|----------------|-----------|
| 50 Ω | Rr =221 1% IREF = 5.00mA | Ioh=4*IREF | 1.0V @ 50 |
| 50 Ω | Rr =475 1% IREF = 2.32mA | Ioh=6*IREF | 0.7V @ 50 |

5.7 Power Pins

| PIN | PIN NAME | TYPE | DESCRIPTION |
|----------------------------|----------|------|------------------------------|
| 3 | VDDREF | PWR | 3.3V power supply for REF. |
| 10,17 | VDDPCI | PWR | 3.3V power supply for PCI. |
| 27 | VDDAGP | PWR | 3.3V power supply for AGP. |
| 40 | VDDCPU | PWR | 3.3V power supply for CPU. |
| 24 | VDD48 | PWR | 3.3 power supply for 48MHz. |
| 34 | VDD2.5 | PWR | 2.5V power supply for 25MHz. |
| 48 | VDDA | PWR | 3.3V power for Analog power |
| 6,11,18,23,28, 37,43,47 | GND | PWR | Ground pin |

W83194BR-903/W83194BG-903



6. FREQUENCY SELECTION BY HARDWARE OR SOFTWARE

This frequency table is used at power on latched FS [4:0] value or software programming at SSEL [4:0] (Register 0 bit 7 ~ 3).

| FS4 | FS3 | FS2 | FS1 | FS0 | CPU (MHZ) | 3V66 (MHZ) | PCI (MHZ) |
|-----|-----|-----|-----|-----|-----------|------------|-----------|
| 0 | 0 | 0 | 0 | 0 | 100.00 | 66.67 | 33.33 |
| 0 | 0 | 0 | 0 | 1 | 200.01 | 66.67 | 33.33 |
| 0 | 0 | 0 | 1 | 0 | 133.34 | 66.67 | 33.33 |
| 0 | 0 | 1 | 0 | 0 | 200.01 | 66.67 | 33.33 |
| 0 | 0 | 1 | 0 | 1 | 400.01 | 66.67 | 33.33 |
| 0 | 0 | 1 | 1 | 0 | 266.68 | 66.67 | 33.33 |
| 0 | 1 | 0 | 0 | 0 | 101.1 | 67.34 | 33.67 |
| 0 | 1 | 0 | 0 | 1 | 202.2 | 67.34 | 33.67 |
| 0 | 1 | 0 | 1 | 0 | 134.68 | 67.34 | 33.67 |
| 1 | 0 | 0 | 0 | 0 | 100.00 | 66.67 | 33.33 |
| 1 | 0 | 0 | 0 | 1 | 200.01 | 66.67 | 33.33 |
| 1 | 0 | 0 | 1 | 0 | 133.34 | 66.67 | 33.33 |
| 1 | 0 | 1 | 0 | 0 | 200.01 | 66.67 | 33.33 |
| 1 | 0 | 1 | 0 | 1 | 400.01 | 66.67 | 33.33 |
| 1 | 0 | 1 | 1 | 0 | 266.68 | 66.67 | 33.33 |
| 1 | 1 | 0 | 0 | 0 | 105.04 | 70.02 | 35.01 |
| 1 | 1 | 0 | 0 | 1 | 210.07 | 70.02 | 35.01 |
| 1 | 1 | 0 | 1 | 0 | 140.05 | 70.02 | 35.01 |



7. I²C CONTROL AND STATUS REGISTERS

7.1 Register 0: Frequency Select (Default = 10h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|--------------|-----|--|
| 7 | SSEL [4] | 0 | Frequency selection by software via I ² C |
| 6 | SSEL [3] | 0 | |
| 5 | SSEL [2] | 0 | |
| 4 | SSEL [1] | 1 | |
| 3 | SSEL [0] | 0 | |
| 2 | EN_SSEL | 0 | Enable software program FS [4:0]. 0 = Select frequency by hardware. 1 = Select frequency by software I ² C - Bit 7~ 3. |
| 1 | EN_SPSP | 0 | Enable Spread Spectrum in the frequency table. 0 = Normal 1 = Spread Spectrum Enabled |
| 0 | EN_SAFE_FREQ | 0 | Enable reload safe frequency when the watchdog is timeout. 0 = reload the FS [4:0] latched pins when watchdog time out. 1 = reload the safe frequency bit defined at Register 5 bit 4~0. |

7.2 Register 1: CPU Clock (1 = Enable, 0 = Stopped) (Default: E2h)

| BIT | PIN NO | PWD | DESCRIPTION |
|-----|--------|-----|---|
| 7 | 45,44 | 1 | CPUT_IPT/CPUC_IPT output control. |
| 6 | 42,41 | 1 | CPUT1 / C1 output control. |
| 5 | 39,38 | 1 | CPUT0 / C0 output control. |
| 4 | - | X | Power on latched value of FS4 pin. Default: 0 (Read only) |
| 3 | - | X | Power on latched value of FS3 pin. Default: 0 (Read only) |
| 2 | - | X | Power on latched value of FS2 pin. Default: 0 (Read only) |
| 1 | - | X | Power on latched value of FS1 pin. Default: 1 (Read only) |
| 0 | - | X | Power on latched value of FS0 pin. Default: 0 (Read only) |



7.3 Register 2: PCI Clock (1 = Enable, 0 = Stopped) (Default: FFh)

| BIT | PIN NO | PWD | DESCRIPTION |
|-----|---------|-----|------------------------|
| 7 | 9 | 1 | PCI_F2 output control. |
| 6 | 8 | 1 | PCI_F1 output control. |
| 5 | 7 | 1 | PCI_F0 output control. |
| 4 | Reserve | 1 | Reserved |
| 3 | 20 | 1 | PCI6 output control. |
| 2 | 19 | 1 | PCI5 output control. |
| 1 | 16 | 1 | PCI4 output control. |
| 0 | 15 | 1 | PCI3 output control. |

7.4 Register 3: PCI, AGP Clock (1 = Enable, 0 = Stopped) (Default: FFh)

| BIT | PIN NO | PWD | DESCRIPTION |
|-----|--------|-----|-----------------------|
| 7 | 14 | 1 | PCI2 output control. |
| 6 | 13 | 1 | PCI1 output control. |
| 5 | 12 | 1 | PCI0 output control. |
| 4 | - | 1 | Don't modify it |
| 3 | 25 | 1 | AGP_2 output control. |
| 2 | 26 | 1 | AGP_1 output control. |
| 1 | 29 | 1 | AGP_0 output control. |
| 0 | - | 1 | Don't modify it |

7.5 Register 4: 24_48MHz, 48MHz, REF, 25MHz Control (1 = Enable, 0 = Stopped) (Default: BFh)

| BIT | PIN NO | PWD | DESCRIPTION |
|-----|--------|-----|--------------------------|
| 7 | 22 | 1 | 24_48MHz output control. |
| 6 | - | 0 | Reserved |
| 5 | 21 | 1 | 48MHz output control. |
| 4 | - | 1 | Reserved |
| 3 | 2 | 1 | REF1 output control. |
| 2 | 1 | 1 | REF0 output control. |
| 1 | 35 | 1 | 25MHz_1 output control. |
| 0 | 36 | 1 | 25MHz_0 output control. |



7.6 Register 5: Watchdog Control (Default: 02h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|--------------|-----|--|
| 7 | SEL24_48 | X | 24 / 48 MHz output selection, 1: 24 MHz.0: 48 MHz. (Default) Default value follow hardware trapping data on SEL24_48# pin. |
| 6 | EN_WD | 0 | Program this bit => 1: Enable Watchdog Timer feature. 0: Disable Watchdog Timer feature. Read-back this bit => During timer count down the bit read back to 1. If count to zero, this bit read back to 0. |
| 5 | WD_TIMEOUT | 0 | Read Back only, Timeout Flag, This bit is Read Only. 1: Watchdog has ever started and counts to zero. 0: Watchdog is restarted and counting. |
| 4 | SAF_FREQ [4] | 0 | These bits will be reloaded in Reg-0 to select frequency table. As the watchdog is timeout and EN_SAFE_FREQ=1. |
| 3 | SAF_FREQ [3] | 0 | |
| 2 | SAF_FREQ [2] | 0 | |
| 1 | SAF_FREQ [1] | 1 | |
| 0 | SAF_FREQ [0] | 0 | |

7.7 Register 6: Reserved (Default: 50h) (Read Only)

| BIT | NAME | PWD | DESCRIPTION |
|-----|----------|-----|-------------|
| 7 | Reserved | 0 | Reserved |
| 6 | Reserved | 1 | |
| 5 | Reserved | 0 | Reserved |
| 4 | Reserved | 1 | |
| 3 | Reserved | 0 | Reserved |
| 2 | Reserved | 0 | |
| 1 | Reserved | 0 | Reserved |
| 0 | Reserved | 0 | |



7.8 Register 7: Winbond Chip ID (Default: 70h) (Read Only)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-------------|-----|--|
| 7 | CHPI_ID [7] | 0 | Winbond Chip ID. W83194BR-903 (SA5870) |
| 6 | CHPI_ID [6] | 1 | Winbond Chip ID. |
| 5 | CHPI_ID [5] | 1 | Winbond Chip ID. |
| 4 | CHPI_ID [4] | 1 | Winbond Chip ID. |
| 3 | CHPI_ID [3] | 0 | Winbond Chip ID. |
| 2 | CHPI_ID [2] | 0 | Winbond Chip ID. |
| 1 | CHPI_ID [1] | 0 | Winbond Chip ID. |
| 0 | CHPI_ID [0] | 0 | Winbond Chip ID. |

7.9 Register 8: M/N Program (Default: 90h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|---|
| 7 | N_DIV [8] | 1 | Programmable N divisor value. Bit 7 ~0 are defined in the Register 9. |
| 6 | M_DIV [6] | 0 | |
| 5 | M_DIV [5] | 0 | |
| 4 | M_DIV [4] | 1 | |
| 3 | M_DIV [3] | 0 | |
| 2 | M_DIV [2] | 0 | |
| 1 | M_DIV [1] | 0 | |
| 0 | M_DIV [0] | 0 | |

7.10 Register 9: M/N Program (Default: 7Ah)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|--|
| 7 | N_DIV [7] | 0 | Programmable N divisor value bit 7 ~0. The bit 8 is defined in Register 8. |
| 6 | N_DIV [6] | 1 | |
| 5 | N_DIV [5] | 1 | |
| 4 | N_DIV [4] | 1 | |
| 3 | N_DIV [3] | 1 | |
| 2 | N_DIV [2] | 0 | |
| 1 | N_DIV [1] | 1 | |
| 0 | N_DIV [0] | 0 | |



7.11 Register 10: M/N Program (Default: BBh)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|--|
| 7 | N_DIV [9] | 1 | Programmable N divisor bit 9. |
| 6 | N3<6> | 0 | Programmable N3 divisor bit 6 ~0 for programmable 25M clocks. M3=10000 (Fix) Frequency range: 21.7M ~ 28.8M Resolution: 56K |
| 5 | N3<5> | 1 | |
| 4 | N3<4> | 1 | |
| 3 | N3<3> | 1 | |
| 2 | N3<2> | 0 | |
| 1 | N3<1> | 1 | |
| 0 | N3<0> | 1 | |

7.12 Register 11: Spread Spectrum Programming (Default: 0Bh)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-------------|-----|--|
| 7 | SP_UP [3] | 0 | Spread Spectrum Up Counter bit 3 ~ bit 0. |
| 6 | SP_UP [2] | 0 | |
| 5 | SP_UP [1] | 0 | |
| 4 | SP_UP [0] | 0 | |
| 3 | SP_DOWN [3] | 1 | Spread Spectrum Down Counter bit 3 ~ bit 0 2's complement representation. Ex: 1 -> 1111; 2 -> 1110; 7 -> 1001; 8 -> 1000 |
| 2 | SP_DOWN [2] | 0 | |
| 1 | SP_DOWN [1] | 1 | |
| 0 | SP_DOWN [0] | 1 | |

7.13 Register 12: Divisor and Step-less Enable Control (Default: FBh)

| BIT | NAME | PWD | DESCRIPTION |
|-----|----------|-----|---|
| 7 | Reserved | 1 | Reserved |
| 6 | DS9 | 1 | Define the AGP divider ratio Table-2 integrate the all divider configuration |
| 5 | DS5 | 1 | |
| 4 | Reserved | 1 | Reserved |
| 3 | Reserved | 1 | |
| 2 | DS2 | 0 | Define the CPU divider ratio Refer to Table-2 |
| 1 | DS1 | 1 | |
| 0 | DS0 | 1 | |



Table-2 CPU, AGP, PCI divider ratio selection Table

| MSB \ LSB | | AGP | | CPU | | | |
|---------------|---|-------|-------|---------|------|------|------|
| | | Bit5 | | Bit1, 0 | | | |
| | | 0 | 1 | 00 | 01 | 10 | 11 |
| Bit2/ Bit9 | 0 | Div6 | Div7 | Div2 | Div3 | Div4 | Div6 |
| | 1 | Div10 | Div12 | Div8 | Div8 | Div8 | Div8 |

7.14 Register 13: Divisor and Step-less Enable Control (Default: 0Fh)

| BIT | NAME | PWD | DESCRIPTION |
|-----|------------|-----|---|
| 7 | EN_MN_PROG | 0 | 0: Output frequency depend on frequency table 1: Program all clock frequency by changing M/N value The equation is $VCO = 14.318MHz * (N+4) / M$ Once the watchdog timer timeout, the bit will be clear. Then the frequency will be decided by hardware default FS<4:0> or desired frequency select SAF_FREQ [4:0] depend on EN_SAFE_FREQ (Reg0 - bit 0). |
| 6 | Reserved | 0 | Reserved |
| 5 | Reserved | 0 | Reserved |
| 4 | Reserved | 0 | Reserved |
| 3 | IVAL<3> | 1 | Charge pump current selection |
| 2 | IVAL<2> | 1 | |
| 1 | IVAL<1> | 1 | |
| 0 | IVAL<0> | 1 | |

7.15 Register 14: Control (Default: 0Ah)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|---|
| 7 | CPUT_DRI | 0 | CPUT output state in during POWER DOWN or Stop mode assertion. 1: Driven ($2 * I_{ref}$), 0: Tristate (Floating) CPUC always tri-state (floating) in power down Assertion. |
| 6 | Reserved | 0 | Reserved |
| 5 | SPCNT [5] | 0 | Spread Spectrum Programmable time, the resolution is 280ns. Default period is 11.8us |
| 4 | SPCNT [4] | 0 | |
| 3 | SPCNT [3] | 1 | |
| 2 | SPCNT [2] | 0 | |
| 1 | SPCNT [1] | 1 | |
| 0 | SPCNT [0] | 0 | |



7.16 Register 15: SST & Skew Control (Default: 2Ch)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|---|
| 7 | INV_CPU | 0 | Invert the CPU phase, 0: Default, 1: Inverse |
| 6 | Reserved | 0 | Reserved |
| 5 | SPSP_TYPE | 1 | Spread spectrum implementation method 1: Pendulum type, 0: Original |
| 4 | SPSP1 | 0 | Spread Spectrum type select. 00: Down 1% 01: Down 0.5% 10: Center +/- 0.5% 11: Center +/- 0.25% |
| 3 | SPSP0 | 1 | |
| 2 | ASKEW [2] | 1 | CPU to AGP skew control, Skew resolution is 340ps Expand the skew direction is same as CPU_AGP_SKEW [2:0] setting |
| 1 | ASKEW [1] | 0 | |
| 0 | ASKEW [0] | 0 | |

7.17 Register 16: Skew Control (Default: 24h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|---|
| 7 | INV_AGP | 0 | Invert the AGP phase, 0: Default, 1: Inverse |
| 6 | INV_PCI | 0 | Invert the PCI phase, 0: Default, 1: Inverse |
| 5 | Reserved | 1 | Reserved |
| 4 | Reserved | 0 | |
| 3 | Reserved | 0 | |
| 2 | PSKEW [2] | 1 | CPU to PCI skew control, Skew resolution is 340ps Expand the skew direction is same as CPU_PCI_SKEW [2:0] setting |
| 1 | PSKEW [1] | 0 | |
| 0 | PSKEW [0] | 0 | |

7.18 Register 17: Slew rate Control (Default: 00h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|--|
| 7 | PCI_F2_S2 | 0 | PCI_F2 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 6 | PCI_F2_S1 | 0 | |
| 5 | PCI_F0_S2 | 0 | PCI_F1 / PCI_F0 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 4 | PCI_F0_S1 | 0 | |
| 3 | AGP_2_S2 | 0 | AGP2 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 2 | AGP_2_S1 | 0 | |
| 1 | AGP_10_S2 | 0 | AGP_1 /AGP_0 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 0 | AGP_10_S1 | 0 | |



7.19 Register 18: Slew rate Control (Default: 00h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|--|
| 7 | PCI_65_S2 | 0 | PCI6, 5 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 6 | PCI_65_S1 | 0 | |
| 5 | PCI_42_S2 | 0 | PCI4, 3,2 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 4 | PCI_42_S1 | 0 | |
| 3 | PCI_10_S2 | 0 | PCI1, 0 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 2 | PCI_10_S1 | 0 | |
| 1 | REF_S2 | 0 | REF0, 1 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 0 | REF_S1 | 0 | |

7.20 Register 19: Slew rate Control (Default: D2h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-------------|-----|---|
| 7 | CPU1STOP_EN | 1 | Stop CPU1 clocks, 1: Enable stop feature, 0: Disable |
| 6 | CPU0STOP_EN | 1 | Stop CPU0 clocks, 1: Enable stop feature, 0: Disable |
| 5 | 25MHz_S2 | 0 | 25MHz_1,0 slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 4 | 25MHz_S1 | 1 | |
| 3 | INV_48MHz | 0 | Invert the 48MHz phase, 0: In phase with 24_48MHz 1: 180 degrees out of phase |
| 2 | 48MHz_S2 | 0 | 48MHz/24_48MHz slew rate control 11: Strong, 00: Weak, 10/01: Normal |
| 1 | 48MHz_S1 | 1 | |
| 0 | MODE | X | Pin 19,20 Mode selection 1: PCI_STOP, CPU_STOP Control pin 0: PCI5, PCI6 (Default) Default value follow hardware trapping data on MODE ^{&} /PCI0 pin. |

7.21 Register 20: Watch dog timer (Default: 08h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-------------|-----|---|
| 7 | SRCF1 | 0 | SRC frequency select, 00/01: 25MHz(Default), 10: 100mhz, 11: 200MHz |
| 6 | WD_TIME [6] | 0 | Setting the down count depth. One bit resolution represents 250ms. Default time depth is 8*250ms = 2.0 second. If the watchdog timer is counting, this register will return present down count value |
| 5 | WD_TIME [5] | 0 | |
| 4 | WD_TIME [4] | 0 | |
| 3 | WD_TIME [3] | 1 | |
| 2 | WD_TIME [2] | 0 | |
| 1 | WD_TIME [1] | 0 | |
| 0 | WD_TIME [0] | 0 | |

W83194BR-903/W83194BG-903



7.22 Register21: Fix Mode Control (Default: 00h)

| BIT | NAME | PWD | DESCRIPTION |
|-----|-----------|-----|--|
| 7 | Tri-state | 0 | Tri-state all output if set 1 |
| 6 | Reserved | 0 | Don't modify it |
| 5 | Reserved | 0 | Don't modify it |
| 4 | FIX_SEL | 0 | AGP output frequency select mode 0: Output frequency according to frequency selection table 1: Output frequency according to FIX frequency Reg21 bit 0~2 |
| 3 | SRCF0 | 0 | SRC frequency select |
| 2 | ASEL_2 | 0 | Asynchronous AGP/PCI frequency table selection ASEL_<2:0> 001: 66 / 33M 010: 75.43 / 37.7M 011: 88 / 44M 100: 88 / 44M 101: 66 / 33M 110: 75.43 / 33M 111: 88 / 33M 000: Clock from PLL1 |
| 1 | ASEL_1 | 0 | |
| 0 | ASEL_0 | 0 | |
| | | | |




8. ACCESS INTERFACE


The W83194BR-903 provides I²C Serial Bus for microprocessor to read/write internal registers. In the W83194BR-903 is provided Block Read/Block Write and Byte-Data Read/Write protocol. The I²C address is defined at 0xD2.

Block Read and Block Write Protocol

8.1 Block Write protocol

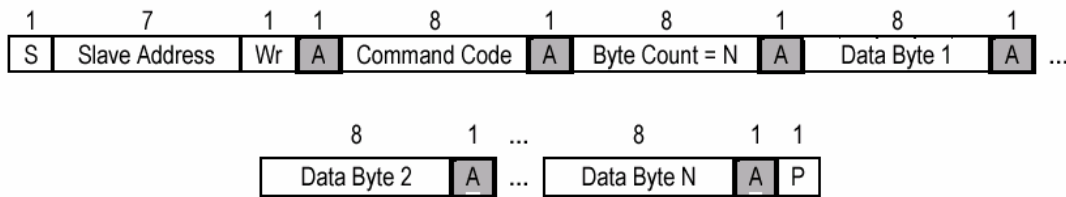


8.2 Block Read protocol

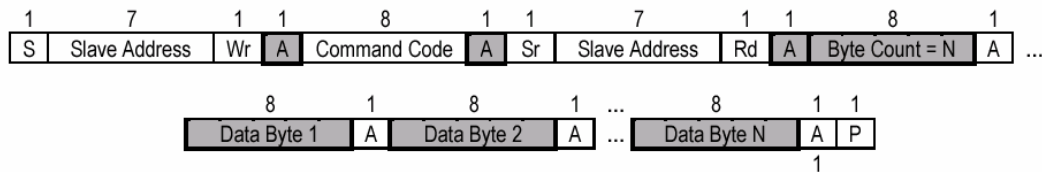


In block mode, the command code must filled 8'h00

8.3 Byte Write protocol



8.4 Byte Read protocol



W83194BR-903/W83194BG-903



9. SPECIFICATIONS

9.1 ABSOLUTE MAXIMUM RATINGS

Stresses greater than those listed in this table may cause permanent damage to the device. Precautions should be taken to avoid application of any voltage higher than the maximum rated voltages to this circuit. Subjection to maximum conditions for extended periods may affect reliability. Unused inputs must always be tied to an appropriate logic voltage level (Ground or VDD).

| PARAMETER | RATING |
|---|--------------------|
| Absolute 3.3V Core Supply Voltage | -0.5V to +4.6V |
| Absolute 3.3V I/O Supply Voltage | - 0.5 V to + 4.6 V |
| Operating 3.3V Core Supply Voltage | 3.135V to 3.465V |
| Operating 3.3V I/O Supply Voltage | 3.135V to 3.465V |
| Storage Temperature | - 65°C to + 150°C |
| Ambient Temperature | - 55°C to + 125°C |
| Operating Temperature | 0°C to + 70°C |
| Input ESD protection (Human body model) | 2000V |

9.2 General Operating Characteristics

| VDDA=VDDAGP=VDDCPU=VDDREF=VDDPCI= 3.3V ± 5 %, TA = 0°C to +70°C, CI=10pF | | | | | |
|---|------------------|-----|-----|-----------------|--|
| PARAMETER | SYMBOL | MIN | MAX | UNITS | TEST CONDITIONS |
| Input Low Voltage | V _{IL} | | 0.8 | V _{dc} | |
| Input High Voltage | V _{IH} | 2.0 | | V _{dc} | |
| Output Low Voltage | V _{OL} | | 0.4 | V _{dc} | All outputs using 3.3V power |
| Output High Voltage | V _{OH} | 2.4 | | V _{dc} | All outputs using 3.3V power |
| Operating Supply Current | I _{dd} | | 350 | mA | CPU = 100 to 400 MHz PCI = 33.3 Mhz with load |
| Input pin capacitance | C _{in} | | 5 | pF | |
| Output pin capacitance | C _{out} | | 6 | pF | |
| Input pin inductance | L _{in} | | 7 | nH | |

W83194BR-903/W83194BG-903



9.3 Skew Group timing clock

| <i>VDDA=VDDAGP=VDDCPU=VDDREF=VDDPCI = 3.3V ± 5 %, TA = 0°C to +70°C, CI=10pF</i> | | | | | |
|---|------------|------------|------------|--------------|------------------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| AGP to PCI Skew | 1.5 | 2.6 | 3.5 | ns | Measured at 1.5V |
| CPU to CPU Skew | | | 200 | ps | Crossing point |
| AGP to AGP Skew | | | 250 | ps | Measured at 1.5V |
| PCI to PCI Skew | | | 500 | ps | Measured at 1.5V |
| 48MHz to 48MHz Skew | | | 1000 | ps | Measured at 1.5V |
| REF to REF Skew | | | 500 | ps | Measured at 1.5V |

9.4 CPU 0.7V Electrical Characteristics

| <i>VDDA=VDDCPU= 3.3V ± 5 %, TA = 0°C to +70°C, Test load Rs=33, Rp=49.9 CI=10pF, Vr=475, IREF=2.32mA, Ioh=6*IREF</i> | | | | | |
|---|------------|------------|--------------|------------------------|--|
| PARAMETER | MIN | MAX | UNITS | TEST CONDITIONS | |
| Rise Time | 175 | 700 | ps | 100 to 200 Mhz | |
| Fall Time | 175 | 700 | ps | 100 to 200Mhz | |
| Absolute crossing point Voltages | 250 | 550 | mV | 100 to 200Mhz | |
| Cycle to Cycle jitter | | 150 | ps | 100 to 200Mhz | |
| Duty Cycle | 45 | 55 | % | 100 to 200Mhz | |

9.5 AGP Electrical Characteristics

| <i>VDDAGP= 3.3V ± 5 %, TA = 0°C to +70°C, Test load, CI=10pF,</i> | | | | | |
|--|------------|------------|--------------|---------------------------|--|
| PARAMETER | MIN | MAX | UNITS | TEST CONDITIONS | |
| Rise Time | 500 | 2000 | ps | Measure from 0.4V to 2.4V | |
| Fall Time | 500 | 2000 | ps | Measure from 2.4V to 0.4V | |
| Cycle to Cycle jitter | | 250 | ps | Measure 1.5V point | |
| Duty Cycle | 45 | 55 | % | | |
| Pull-Up Current Min | -33 | | mA | Vout=1.0V | |
| Pull-Up Current Max | | -33 | mA | Vout=3.135V | |
| Pull-Down Current Min | 30 | | mA | Vout=1.95V | |
| Pull-Down Current Max | | 38 | mA | Vout=0.4V | |

W83194BR-903/W83194BG-903



9.6 PCI Electrical Characteristics

| VDDPCI= 3.3V ± 5 %, TA = 0°C to +70°C, Test load, CI=10pF, | | | | |
|---|-----|------|-------|---------------------------|
| PARAMETER | MIN | MAX | UNITS | TEST CONDITIONS |
| Rise Time | 500 | 2000 | ps | Measure from 0.4V to 2.4V |
| Fall Time | 500 | 2000 | ps | Measure from 2.4V to 0.4V |
| Cycle to Cycle jitter | | 250 | ps | Measure 1.5V point |
| Duty Cycle | 45 | 55 | % | |
| Pull-Up Current Min | -33 | | mA | Vout=1.0V |
| Pull-Up Current Max | | -33 | mA | Vout=3.135V |
| Pull-Down Current Min | 30 | | mA | Vout=1.95V |
| Pull-Down Current Max | | 38 | mA | Vout=0.4V |

9.7 24M, 48M Electrical Characteristics

| VDD48= 3.3V ± 5 %, TA = 0°C to +70°C, Test load, CI=10pF, | | | | |
|--|-----|------|-------|---------------------------|
| PARAMETER | MIN | MAX | UNITS | TEST CONDITIONS |
| Rise Time | 500 | 2000 | ps | Measure from 0.4V to 2.4V |
| Fall Time | 500 | 2000 | ps | Measure from 2.4V to 0.4V |
| Long term jitter | | 500 | ps | Measure 1.5V point |
| Duty Cycle | 45 | 55 | % | |
| Pull-Up Current Min | -33 | | mA | Vout=1.0V |
| Pull-Up Current Max | | -33 | mA | Vout=3.135V |
| Pull-Down Current Min | 30 | | mA | Vout=1.95V |
| Pull-Down Current Max | | 38 | mA | Vout=0.4V |

9.8 REF Electrical Characteristics

| VDDREF= 3.3V ± 5 %, TA = 0°C to +70°C, Test load, CI=10pF, | | | | |
|---|------|------|-------|---------------------------|
| PARAMETER | MIN | MAX | UNITS | TEST CONDITIONS |
| Rise Time | 1000 | 4000 | ps | Measure from 0.4V to 2.4V |
| Fall Time | 1000 | 4000 | ps | Measure from 2.4V to 0.4V |
| Cycle to Cycle jitter | | 1000 | ps | Measure 1.5V point |
| Duty Cycle | 45 | 55 | % | |
| Pull-Up Current Min | -33 | | mA | Vout=1.0V |
| Pull-Up Current Max | | -33 | mA | Vout=3.135V |
| Pull-Down Current Min | 30 | | mA | Vout=1.95V |
| Pull-Down Current Max | | 38 | mA | Vout=0.4V |



W83194BR-903/W83194BG-903



10. ORDERING INFORMATION

| PART NUMBER | PACKAGE TYPE | PRODUCTION FLOW |
|--------------|---------------------------------|--------------------------|
| W83194BR-903 | 48 PIN SSOP | Commercial, 0°C to +70°C |
| W83194BG-903 | 48 PIN SSOP (Lead free part) | Commercial, 0°C to +70°C |

11. HOW TO READ THE TOP MARKING

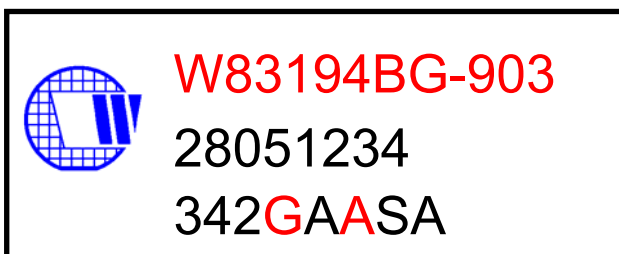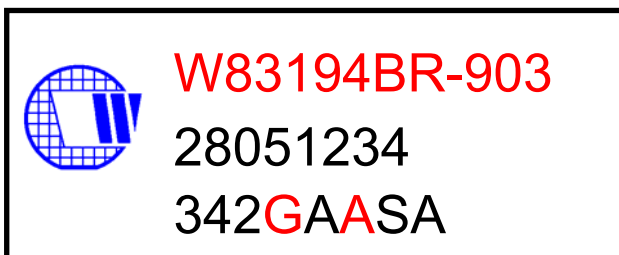

1st line: Winbond logo and the type number:

Normal:W83194BR-903, Lead free part:W83194BG-903

2nd line: Tracking code 2 8051234

2: wafers manufactured in Winbond FAB 2

8051234: wafer production series lot number

3rd line: Tracking code 342 G A A SA

320: packages made in '2003, week 42

G: assembly house ID; O means OSE, G means GR

A: Internal use code

A: IC revision


SA: Internal use code

All the trademarks of products and companies mentioned in this datasheet belong to their respective owners.

W83194BR-903/W83194BG-903



12. PACKAGE DRAWING AND DIMENSIONS

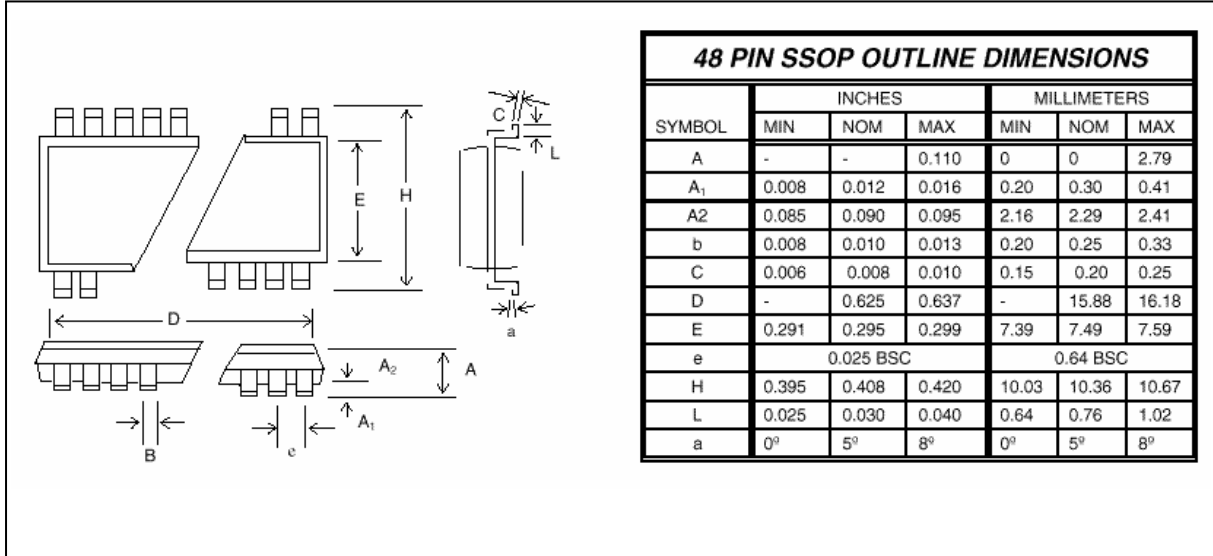



Important Notice

Winbond products are not designed, intended, authorized or warranted for use as components in systems or equipment intended for surgical implantation, atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, or for other applications intended to support or sustain life. Further more, Winbond products are not intended for applications wherein failure of Winbond products could result or lead to a situation wherein personal injury, death or severe property or environmental damage could occur.

Winbond customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Winbond for any damages resulting from such improper use or sales.



Headquarters

No. 4, Creation Rd. III,
Science-Based Industrial Park,
Hsinchu, Taiwan
TEL: 886-3-5770066
FAX: 886-3-5665577
<http://www.winbond.com.tw/>

Taipei Office

9F, No.480, Rueiguang Rd.,
Neihu District, Taipei, 114,
Taiwan, R.O.C.
TEL: 886-2-8177-7168
FAX: 886-2-8751-3579

Winbond Electronics Corporation America

2727 North First Street, San Jose,
CA 95134, U.S.A.
TEL: 1-408-9436666
FAX: 1-408-5441798

Winbond Electronics Corporation Japan

7F Daini-ueno BLDG, 3-7-18
Shinyokohama Kohoku-ku,
Yokohama, 222-0033
TEL: 81-45-4781881
FAX: 81-45-4781800

Winbond Electronics (Shanghai) Ltd.

27F, 2299 Yan An W. Rd. Shanghai,
200336 China
TEL: 86-21-62365999
FAX: 86-21-62365998

Winbond Electronics (H.K.) Ltd.

Unit 9-15, 22F, Millennium City,
No. 378 Kwun Tong Rd.,
Kowloon, Hong Kong
TEL: 852-27513100
FAX: 852-27552064

*Please note that all data and specifications are subject to change without notice.
All the trademarks of products and companies mentioned in this datasheet belong to their respective owners.*