

12MHz 4, 8, 10 & 12 Channel Rail-to-Rail Input-Output Buffers

The EL5123, EL5223, EL5323, and EL5423 are low power, high voltage rail-to-rail input/output buffers designed primarily for use in reference voltage buffering applications for TFT-LCDs. They are available in quad (EL5123), octal (EL5223), 10-channel (EL5323), and 12-channel (EL5423) topologies. All buffers feature a -3dB bandwidth of 12MHz and operate from just 600 μ A per buffer. This family also features fast slewing and settling times, as well as a continuous output drive capability of 30mA (sink and source).

The quad channel EL5123 is available in the 10-pin MSOP package. The 8-channel EL5223 is available in both the 20-pin TSSOP and 24-pin QFN packages, the 10-channel EL5323 in the 24-pin TSSOP and 24-pin QFN packages, and the 12-channel EL5423 in the 28-pin TSSOP and 32-pin QFN packages. All buffers are specified for operation over the full -40°C to +85°C temperature range.

Features


- 12MHz -3dB bandwidth
- Supply voltage = 4.5V to 16.5V
- Low supply current (per buffer) = 600 μ A
- High slew rate = 15V/ μ s
- Rail-to-rail input/output swing
- Ultra-small packages
- Pb-free available (RoHS compliant)

Applications

- TFT-LCD drive circuits
- Electronics notebooks
- Electronic games
- Touch-screen displays
- Personal communication devices
- Personal digital assistants (PDA)
- Portable instrumentation
- Sampling ADC amplifiers
- Wireless LANs
- Office automation
- Active filters
- ADC/DAC buffers


Pinouts

EL5223 & EL5323
(24-PIN QFN)
TOP VIEW

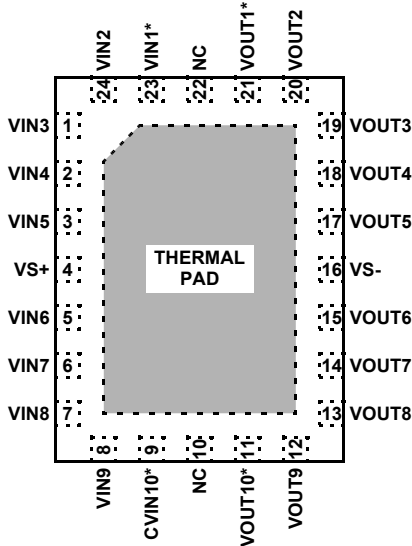


* NOT AVAILABLE IN EL5223


EL5123
(10-PIN MSOP)
TOP VIEW




EL5223
(20-PIN TSSOP)
TOP VIEW

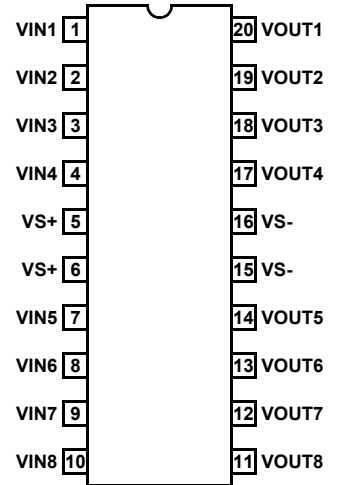


EL5423
(32-PIN QFN)
TOP VIEW

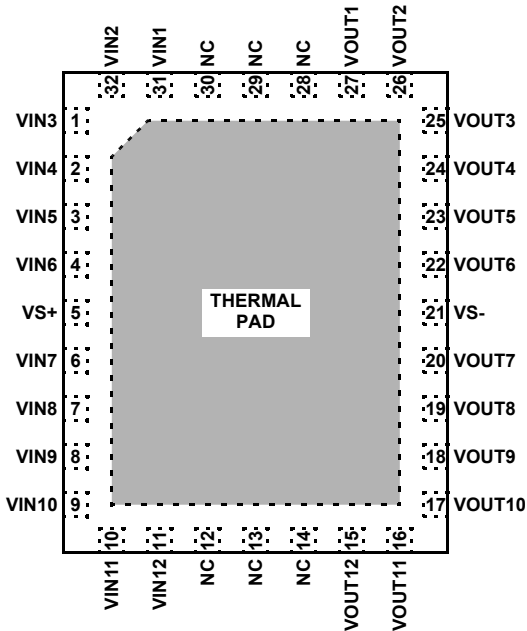

EL5423
(28-PIN TSSOP)
TOP VIEW

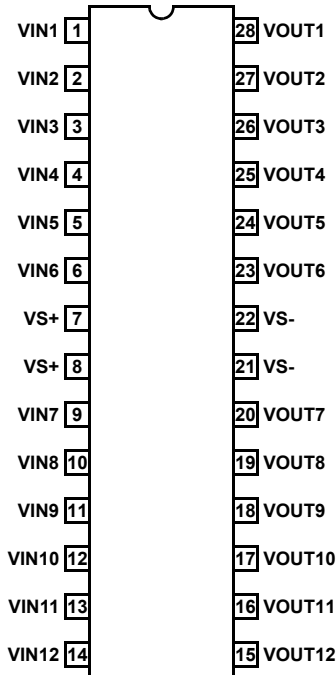

EL5323
(24-PIN TSSOP)
TOP VIEW

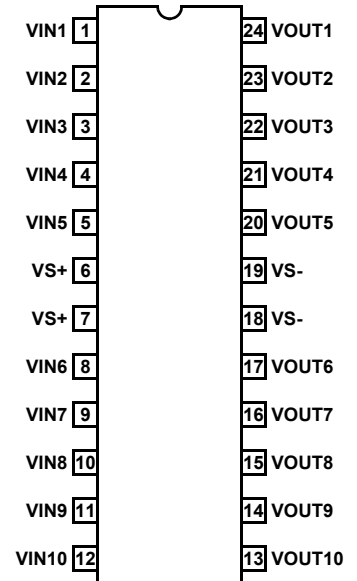

Ordering Information

PART NO.	PACKAGE	TAPE & REEL	PKG. DWG. #
EL5123CY	10-Pin MSOP	-	MDP0043
EL5123CY-T7	10-Pin MSOP	7"	MDP0043
EL5123CY-T13	10-Pin MSOP	13"	MDP0043
EL5123CYZ (See Note)	10-Pin MSOP (Pb-Free)	-	MDP0043
EL5123CYZ-T7 (See Note)	10-Pin MSOP (Pb-Free)	7"	MDP0043
EL5123CYZ-T13 (See Note)	10-Pin MSOP (Pb-Free)	13"	MDP0043
EL5223CL	24-Pin QFN	-	MDP0046
EL5223CL-T7	24-Pin QFN	7"	MDP0046
EL5223CL-T13	24-Pin QFN	13"	MDP0046
EL5223CLZ (See Note)	24-Pin QFN (Pb-Free)	-	MDP0046
EL5223CLZ-T7 (See Note)	24-Pin QFN (Pb-Free)	7"	MDP0046
EL5223CLZ-T13 (See Note)	24-Pin QFN (Pb-Free)	13"	MDP0046
EL5223CR	20-Pin TSSOP	-	MDP0044
EL5223CR-T7	20-Pin TSSOP	7"	MDP0044
EL5223CR-T13	20-Pin TSSOP	13"	MDP0044
EL5223CRZ (See Note)	20-Pin TSSOP (Pb-Free)	-	MDP0044
EL5223CRZ-T7 (See Note)	20-Pin TSSOP (Pb-Free)	7"	MDP0044
EL5223CRZ-T13 (See Note)	20-Pin TSSOP (Pb-Free)	13"	MDP0044
EL5323CL	24-Pin QFN	-	MDP0046
EL5323CL-T7	24-Pin QFN	7"	MDP0046
EL5323CL-T13	24-Pin QFN	13"	MDP0046

PART NO.	PACKAGE	TAPE & REEL	PKG. DWG. #
EL5323CLZ (See Note)	24-Pin QFN (Pb-Free)	-	MDP0046
EL5323CLZ-T7 (See Note)	24-Pin QFN (Pb-Free)	7"	MDP0046
EL5323CLZ-T13 (See Note)	24-Pin QFN (Pb-Free)	13"	MDP0046
EL5323CR	24-Pin TSSOP	-	MDP0044
EL5323CR-T7	24-Pin TSSOP	7"	MDP0044
EL5323CR-T13	24-Pin TSSOP	13"	MDP0044
EL5323CRZ (See Note)	24-Pin TSSOP (Pb-Free)	-	MDP0044
EL5323CRZ-T7 (See Note)	24-Pin TSSOP (Pb-Free)	7"	MDP0044
EL5323CRZ-T13 (See Note)	24-Pin TSSOP (Pb-Free)	13"	MDP0044
EL5423CL	32-Pin QFN	-	MDP0046
EL5423CL-T7	32-Pin QFN	7"	MDP0046
EL5423CL-T13	32-Pin QFN	13"	MDP0046
EL5423CLZ (See Note)	32-Pin QFN (Pb-Free)	-	MDP0046
EL5423CLZ-T7 (See Note)	32-Pin QFN (Pb-Free)	7"	MDP0046
EL5423CLZ-T13 (See Note)	32-Pin QFN (Pb-Free)	13"	MDP0046
EL5423CR	28-Pin TSSOP	-	MDP0044
EL5423CR-T7	28-Pin TSSOP	7"	MDP0044
EL5423CR-T13	28-Pin TSSOP	13"	MDP0044
EL5423CRZ (See Note)	28-Pin TSSOP (Pb-Free)	-	MDP0044
EL5423CRZ-T7 (See Note)	28-Pin TSSOP (Pb-Free)	7"	MDP0044
EL5423CRZ-T13 (See Note)	28-Pin TSSOP (Pb-Free)	13"	MDP0044

NOTE: Intersil Pb-free products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020C.

EL5123, EL5223, EL5323, EL5423

Absolute Maximum Ratings (T_A = 25°C)

Supply Voltage between V _{S+} and V _{S-} +18V	Storage Temperature -65°C to +150°C
Input Voltage V _{S-} -0.5V, V _S +0.5V	Operating Temperature -40°C to +85°C
Maximum Continuous Output Current 30mA	Power Dissipation See Curves
Maximum Die Temperature +125°C	ESD Voltage 2kV

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

IMPORTANT NOTE: All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: T_J = T_C = T_A

Electrical Specifications V_{S+} = +5V, V_{S-} = -5V, R_L = 10kΩ and C_L = 10pF to 0V, T_A = 25°C unless otherwise specified.

PARAMETER	DESCRIPTION	CONDITION	MIN	TYP	MAX	UNIT
INPUT CHARACTERISTICS						
V _{OS}	Input Offset Voltage	V _{CM} = 0V		0.5	12	mV
TCV _{OS}	Average Offset Voltage Drift	(Note 1)		5		μV/°C
I _B	Input Bias Current	V _{CM} = 0V		2	50	nA
R _{IN}	Input Impedance			1		GΩ
C _{IN}	Input Capacitance			1.35		pF
A _V	Voltage Gain	-4.5V ≤ V _{OUT} ≤ 4.5V	0.99		1.01	V/V
OUTPUT CHARACTERISTICS						
V _{OL}	Output Swing Low	I _L = -5mA		-4.95	-4.85	V
V _{OH}	Output Swing High	I _L = +5mA	4.85	4.95		V
I _{OUT} (max)	Output Current (Note 2)	R _L = 10Ω		±120		mA
POWER SUPPLY PERFORMANCE						
PSRR	Power Supply Rejection Ratio	V _S is moved from ±2.25V to ±7.75V	55	80		dB
I _S	Supply Current	No load (EL5123)		2.4	3.4	mA
		No load (EL5223)		5.5	6.8	mA
		No load (EL5323)		6	8.5	mA
		No load (EL5423)		7.45	10.1	mA
DYNAMIC PERFORMANCE						
SR	Slew Rate (Note 3)	-4.0V ≤ V _{OUT} ≤ 4.0V, 20% to 80%	7	15		V/μs
t _S	Settling to +0.1% (A _V = +1)	(A _V = +1), V _O = 2V step		250		ns
BW	-3dB Bandwidth	R _L = 10kΩ, C _L = 10pF		12		MHz
CS	Channel Separation	f = 5MHz		75		dB

NOTES:

1. Measured over operating temperature range.
2. Instantaneous peak current.
3. Slew rate is measured on rising and falling edges.

EL5123, EL5223, EL5323, EL5423

Electrical Specifications $V_{S+} = +5V$, $V_{S-} = 0V$, $R_L = 10k\Omega$ and $C_L = 10pF$ to 2.5V, $T_A = 25^\circ C$ unless otherwise specified.

PARAMETER	DESCRIPTION	CONDITION	MIN	TYP	MAX	UNIT
INPUT CHARACTERISTICS						
V_{OS}	Input Offset Voltage	$V_{CM} = 2.5V$		0.5	12	mV
TCV_{OS}	Average Offset Voltage Drift	(Note 1)		5		$\mu V/^\circ C$
I_B	Input Bias Current	$V_{CM} = 2.5V$		2	50	nA
R_{IN}	Input Impedance			1		$G\Omega$
C_{IN}	Input Capacitance			1.35		pF
A_V	Voltage Gain	$0.5V \leq V_{OUT} \leq 4.5V$	0.99		1.01	V/V
OUTPUT CHARACTERISTICS						
V_{OL}	Output Swing Low	$I_L = -2.5mA$		80	150	mV
V_{OH}	Output Swing High	$I_L = +2.5mA$	4.85	4.92		V
$I_{OUT} (max)$	Output Current (Note 2)	$R_L = 10\Omega$		± 120		mA
POWER SUPPLY PERFORMANCE						
PSRR	Power Supply Rejection Ratio	V_S is moved from 4.5V to 15.5V	55	80		dB
I_S	Supply Current	No load (EL5123)		2.4	3.2	mA
		No load (EL5223)		5.2	6.5	mA
		No load (EL5323)		5.8	8	mA
		No load (EL5423)		7.2	9.7	mA
DYNAMIC PERFORMANCE						
SR	Slew Rate (Note 3)	$1V \leq V_{OUT} \leq 4V$, 20% to 80%		12		V/ μs
t_S	Settling to +0.1% ($A_V = +1$)	($A_V = +1$), $V_O = 2V$ step		250		ns
BW	-3dB Bandwidth	$R_L = 10k\Omega$, $C_L = 10pF$		12		MHz
CS	Channel Separation	$f = 5MHz$		75		dB

NOTES:

1. Measured over operating temperature range.
2. Instantaneous peak current.
3. Slew rate is measured on rising and falling edges

EL5123, EL5223, EL5323, EL5423

Electrical Specifications $V_{S+} = +15V$, $V_{S-} = 0V$, $R_L = 10k\Omega$ and $C_L = 10pF$ to 7.5V, $T_A = 25^\circ C$ unless otherwise specified.

PARAMETER	DESCRIPTION	CONDITION	MIN	TYP	MAX	UNIT
INPUT CHARACTERISTICS						
V_{OS}	Input Offset Voltage	$V_{CM} = 7.5V$		0.5	14	mV
TCV_{OS}	Average Offset Voltage Drift	(Note 1)		5		$\mu V/^\circ C$
I_B	Input Bias Current	$V_{CM} = 7.5V$		2	50	nA
R_{IN}	Input Impedance			1		$G\Omega$
C_{IN}	Input Capacitance			1.35		pF
A_V	Voltage Gain	$0.5V \leq V_{OUT} \leq 14.5V$	0.99		1.01	V/V
OUTPUT CHARACTERISTICS						
V_{OL}	Output Swing Low	$I_L = -7.5mA$		80	150	mV
V_{OH}	Output Swing High	$I_L = +7.5mA$	14.85	14.95		V
$I_{OUT} (max)$	Output Current (Note 2)	$R_L = 10\Omega$	120	200		mA
POWER SUPPLY PERFORMANCE						
PSRR	Power Supply Rejection Ratio	V_S is moved from 4.5V to 15.5V	55	80		dB
I_S	Supply Current	No load (EL5123)		2.4	3.7	mA
		No load (EL5223)		5.7	7.1	mA
		No load (EL5323)		6.2	8.7	mA
		No load (EL5423)		7.8	10.4	mA
DYNAMIC PERFORMANCE						
SR	Slew Rate (Note 3)	$1V \leq V_{OUT} \leq 14V$, 20% to 80%		18		$V/\mu s$
t_S	Settling to +0.1% ($A_V = +1$)	($A_V = +1$), $V_O = 2V$ step		250		ns
BW	-3dB Bandwidth	$R_L = 10k\Omega$, $C_L = 10pF$		12		MHz
CS	Channel Separation	$f = 5MHz$		75		dB

NOTES:

1. Measured over operating temperature range.
2. Instantaneous peak current.
3. Slew rate is measured on rising and falling edges.

Typical Performance Curves

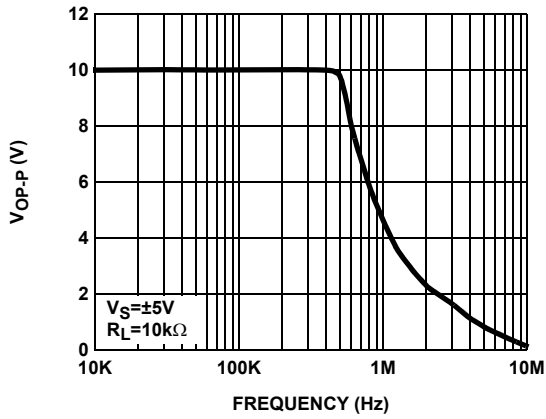


FIGURE 1. OUTPUT SWING vs FREQUENCY

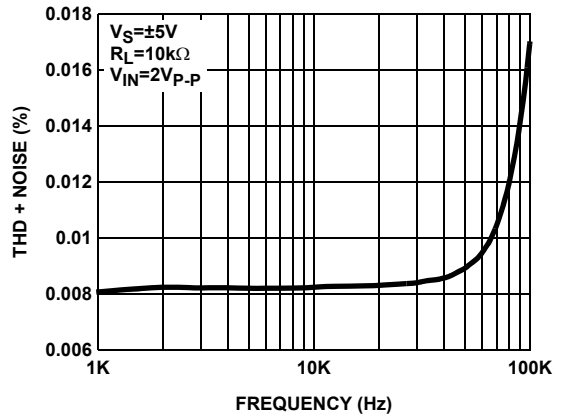


FIGURE 2. TOTAL HARMONIC DISTORTION + NOISE vs FREQUENCY

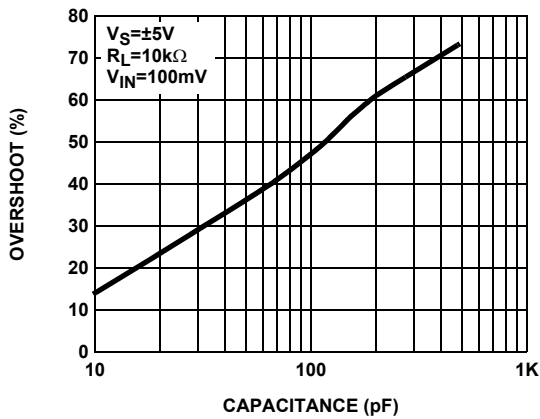


FIGURE 3. OVERSHOOT vs LOAD CAPACITANCE

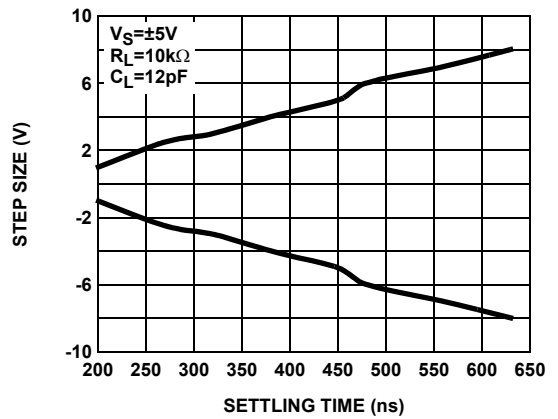


FIGURE 4. SETTLING TIME vs STEP SIZE

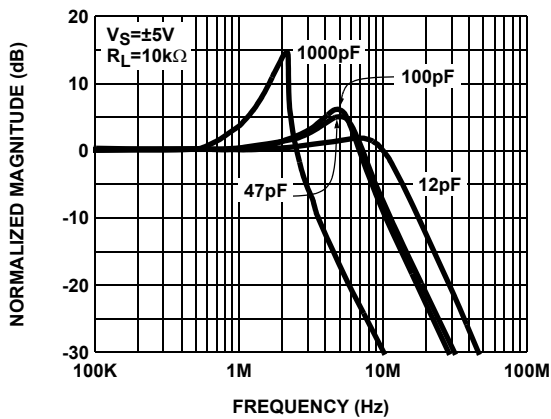


FIGURE 5. FREQUENCY RESPONSE FOR VARIOUS C_L

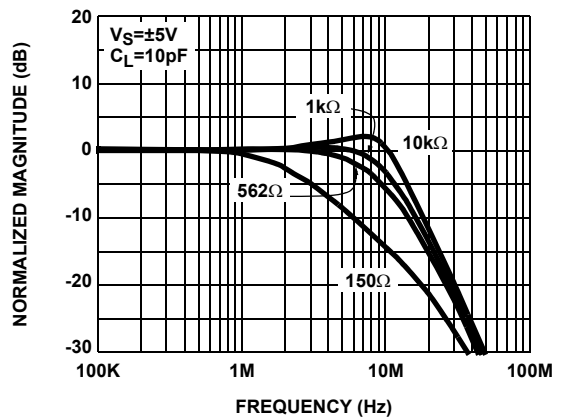


FIGURE 6. FREQUENCY RESPONSE FOR VARIOUS R_L

Typical Performance Curves

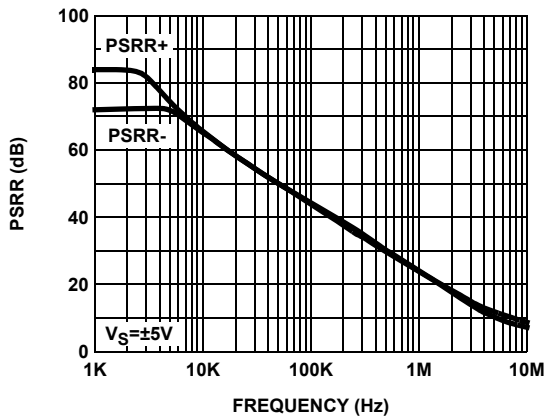


FIGURE 7. PSRR vs FREQUENCY

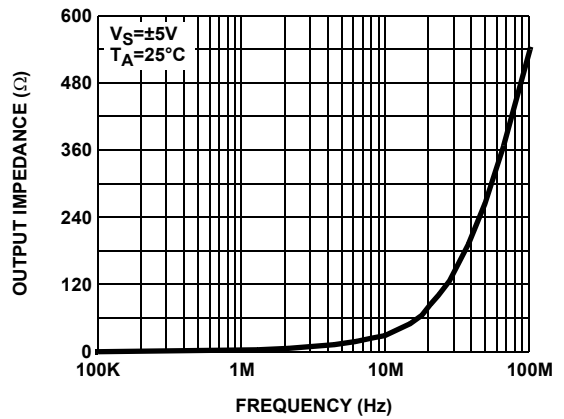


FIGURE 8. OUTPUT IMPEDANCE vs FREQUENCY

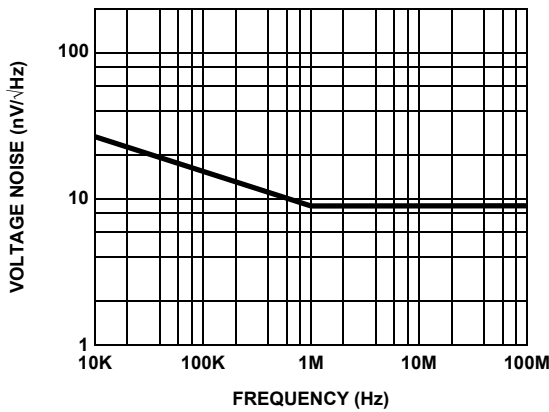


FIGURE 9. INPUT NOISE SPECTRAL DENSITY vs FREQUENCY

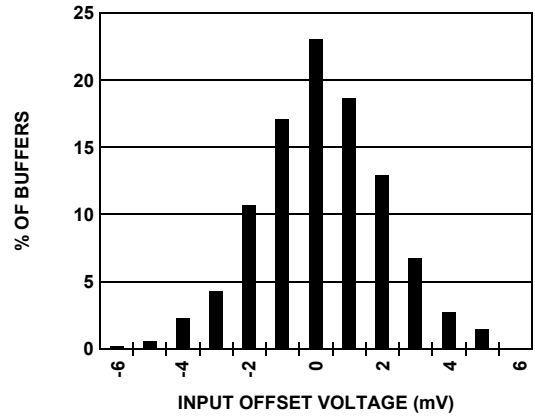


FIGURE 10. INPUT OFFSET VOLTAGE DISTRIBUTION

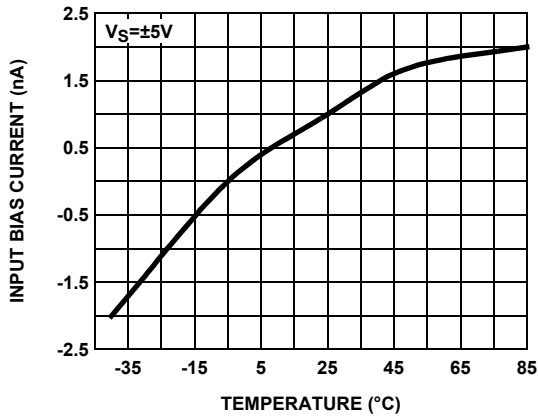


FIGURE 11. INPUT BIAS CURRENT vs TEMPERATURE

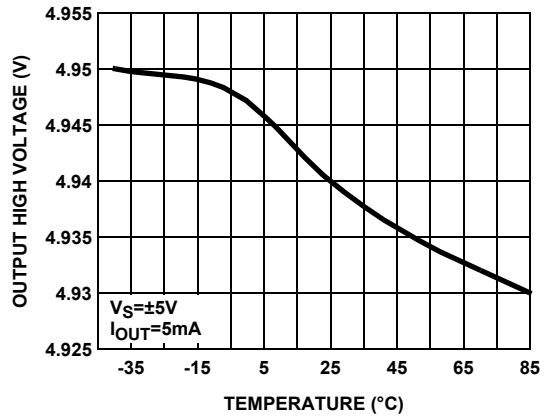


FIGURE 12. OUTPUT HIGH VOLTAGE vs TEMPERATURE

Typical Performance Curves

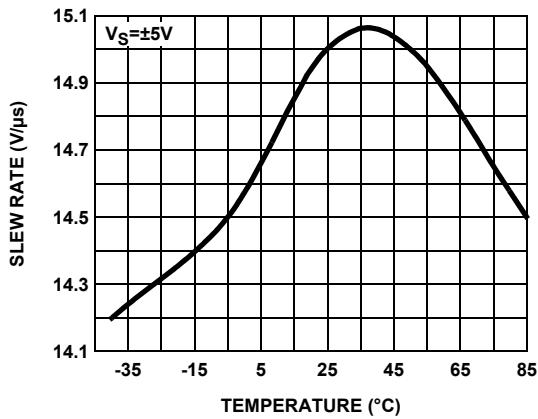


FIGURE 13. SLEW RATE vs TEMPERATURE

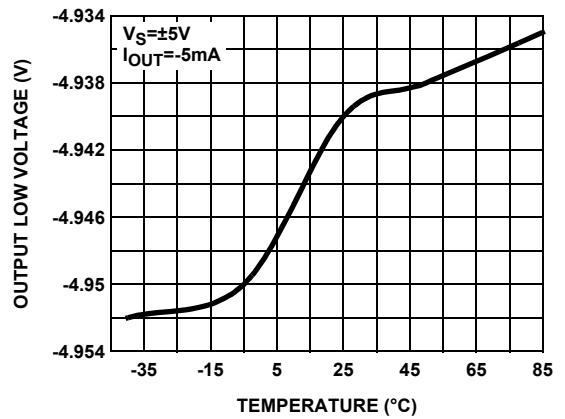


FIGURE 14. OUTPUT LOW VOLTAGE vs TEMPERATURE

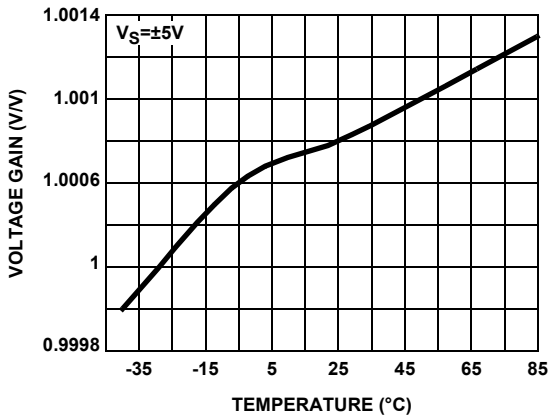


FIGURE 15. VOLTAGE GAIN vs TEMPERATURE

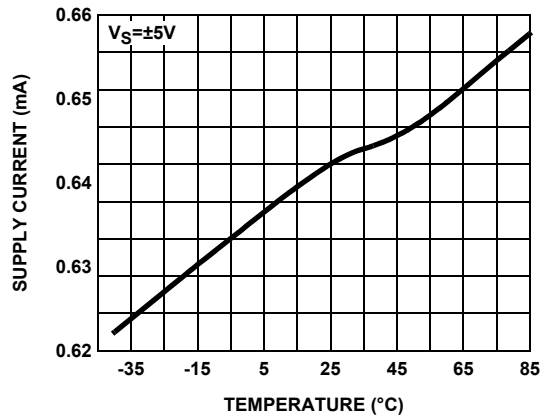


FIGURE 16. SUPPLY CURRENT PER CHANNEL vs TEMPERATURE

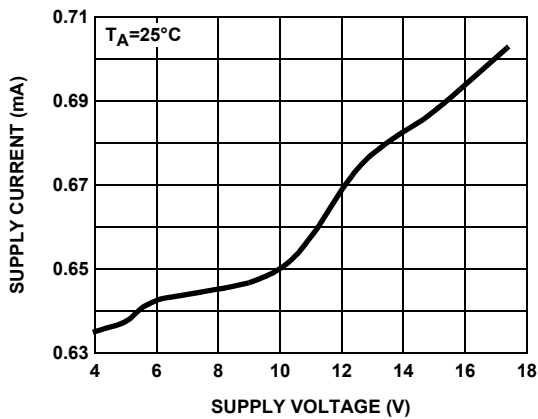


FIGURE 17. SUPPLY CURRENT PER CHANNEL vs SUPPLY VOLTAGE

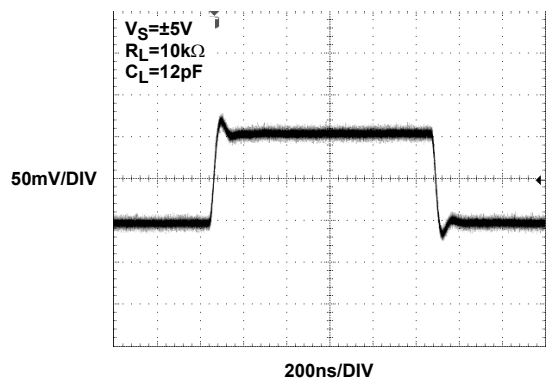


FIGURE 18. SMALL SIGNAL TRANSIENT RESPONSE

Typical Performance Curves

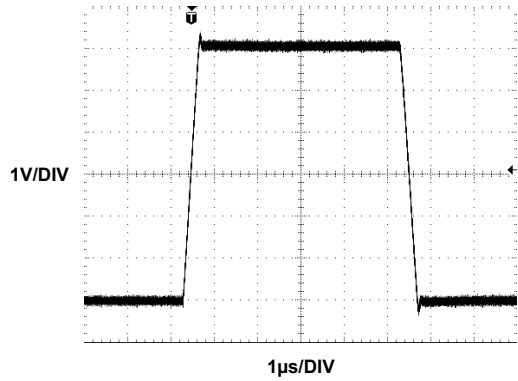


FIGURE 19. LARGE SIGNAL TRANSIENT RESPONSE

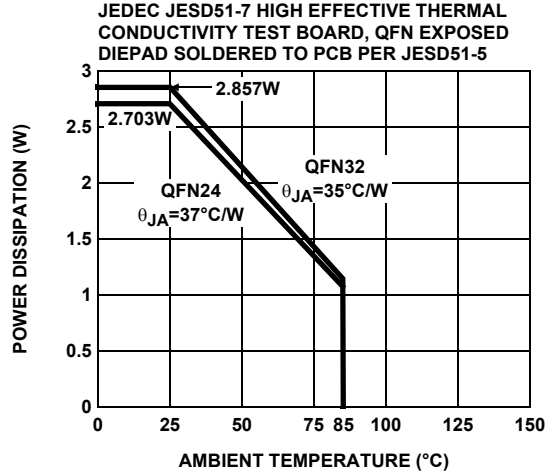


FIGURE 20. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

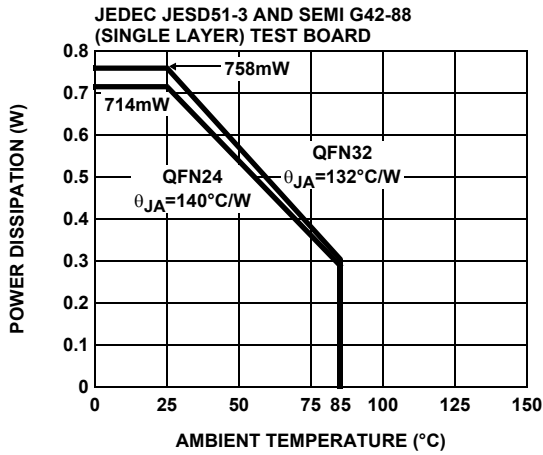


FIGURE 21. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

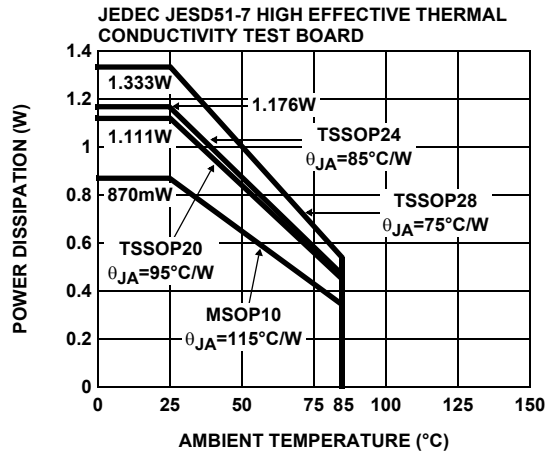


FIGURE 22. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

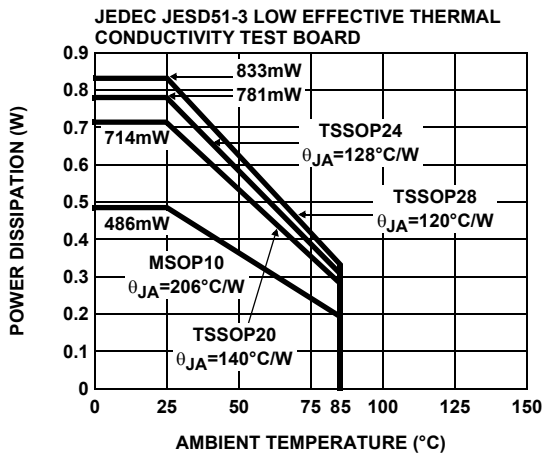


FIGURE 23. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

Applications Information

Product Description

The EL5123, EL5223, EL5323, and EL5423 unity gain buffers are fabricated using a high voltage CMOS process. It exhibits rail-to-rail input and output capability and has low power consumption (600µA per buffer). These features make the EL5123, EL5223, EL5323, and EL5423 ideal for a wide range of general-purpose applications. When driving a load of 10kΩ and 12pF, the EL5123, EL5223, EL5323, and EL5423 have a -3dB bandwidth of 12MHz and exhibits 15V/µs slew rate.

Operating Voltage, Input, and Output

The EL5123, EL5223, EL5323, and EL5423 are specified with a single nominal supply voltage from 5V to 15V or a split supply with its total range from 5V to 15V. Correct operation is guaranteed for a supply range of 4.5V to 16.5V. Most EL5123, EL5223, EL5323, and EL5423 specifications are stable over both the full supply range and operating temperatures of -40°C to +85°C. Parameter variations with operating voltage and/or temperature are shown in the typical performance curves.

The output swings of the EL5123, EL5223, EL5323, and EL5423 typically extend to within 50mV of positive and negative supply rails with load currents of 5mA. Decreasing load currents will extend the output voltage range even closer to the supply rails. Figure 24 shows the input and output waveforms for the device. Operation is from ±5V supply with a 10kΩ load connected to GND. The input is a 10V_{P-P} sinusoid. The output voltage is approximately 9.985V_{P-P}.

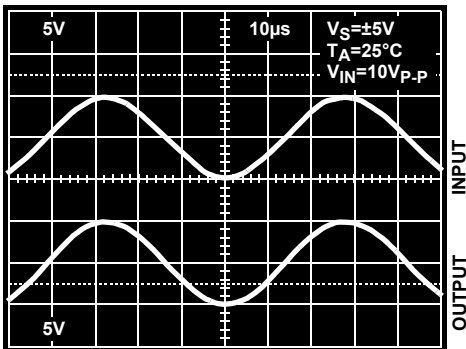


FIGURE 24. OPERATION WITH RAIL-TO-RAIL INPUT AND OUTPUT

Short Circuit Current Limit

The EL5123, EL5223, EL5323, and EL5423 will limit the short circuit current to ±120mA if the output is directly shorted to the positive or the negative supply. If an output is shorted indefinitely, the power dissipation could easily increase such that the device may be damaged. Maximum reliability is maintained if the output continuous current never

exceeds ±30mA. This limit is set by the design of the internal metal interconnects.

Output Phase Reversal

The EL5123, EL5223, EL5323, and EL5423 are immune to phase reversal as long as the input voltage is limited from $V_S - 0.5V$ to $V_S + 0.5V$. Figure 25 shows a photo of the output of the device with the input voltage driven beyond the supply rails. Although the device's output will not change phase, the input's over-voltage should be avoided. If an input voltage exceeds supply voltage by more than 0.6V, electrostatic protection diodes placed in the input stage of the device begin to conduct and over-voltage damage could occur.

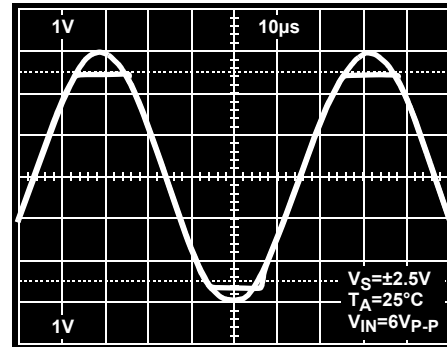


FIGURE 25. OPERATION WITH BEYOND-THE-RAILS INPUT

Power Dissipation

With the high-output drive capability of the EL5123, EL5223, EL5323, and EL5423 buffer, it is possible to exceed the 125°C “absolute-maximum junction temperature” under certain load current conditions. Therefore, it is important to calculate the maximum junction temperature for the application to determine if load conditions need to be modified for the buffer to remain in the safe operating area.

The maximum power dissipation allowed in a package is determined according to:

$$P_{DMAX} = \frac{T_{JMAX} - T_{AMAX}}{d\theta_{JA}}$$

where:

T_{JMAX} = Maximum junction temperature

T_{AMAX} = Maximum ambient temperature

θ_{JA} = Thermal resistance of the package

P_{DMAX} = Maximum power dissipation in the package

The maximum power dissipation actually produced by an IC is the total quiescent supply current times the total power supply voltage, plus the power in the IC due to the loads, or:

$$P_{DMAX} = \Sigma i[V_S \times I_{SMAX} + (V_S - V_{OUTi}) \times I_{LOADi}]$$

when sourcing, and

$$P_{D_{MAX}} = \sum_i [V_S \times I_{S_{MAX}} + (V_{OUT_i} - V_{S^-}) \times I_{LOAD_i}]$$

when sinking.

where:

$i = 1$ to Total number of buffers

V_S = Total supply voltage

$I_{S_{MAX}}$ = Maximum quiescent current per channel

V_{OUT_i} = Maximum output voltage of the application

I_{LOAD_i} = Load current

If we set the two $P_{D_{MAX}}$ equations equal to each other, we can solve for R_{LOAD_i} to avoid device overheat. The package power dissipation curves provide a convenient way to see if the device will overheat. The maximum safe power dissipation can be found graphically, based on the package type and the ambient temperature. By using the previous equation, it is a simple matter to see if $P_{D_{MAX}}$ exceeds the device's power derating curves.

Unused Buffers

It is recommended that any unused buffer have the input tied to the ground plane.

Driving Capacitive Loads

The EL5123, EL5223, EL5323, and EL5423 can drive a wide range of capacitive loads. As load capacitance increases, however, the -3dB bandwidth of the device will decrease and the peaking increase. The buffers drive 10pF loads in parallel with 10k Ω with just 1.5dB of peaking, and 100pF with 6.4dB of peaking. If less peaking is desired in these applications, a small series resistor (usually between 5 Ω and 50 Ω) can be placed in series with the output. However, this will obviously reduce the gain slightly. Another method of reducing peaking is to add a "snubber" circuit at the output. A snubber is a shunt load consisting of a resistor in series with a capacitor. Values of 150 Ω and 10nF are typical. The advantage of a snubber is that it does not draw any DC load current or reduce the gain.

Power Supply Bypassing and Printed Circuit Board Layout

As with any high frequency device, good printed circuit board layout is necessary for optimum performance. Ground plane construction is highly recommended, lead lengths should be as short as possible, and the power supply pins must be well bypassed to reduce the risk of oscillation. For normal single supply operation, where the V_{S^-} pin is connected to ground, a 0.1 μ F ceramic capacitor should be placed from V_{S^+} pin to ground. A 4.7 μ F tantalum capacitor should then be connected from V_{S^+} pin to ground. One 4.7 μ F capacitor may be used for multiple devices. This same capacitor combination should be placed at each supply pin to ground if split supplies are to be used.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com