

SPECIFICATIONS

A179-01-01-B

ITEMS	MODEL	JWT100-522			JWT100-5FF			JWT100-525				
		V1	V2	V3	V1	V2	V3	V1	V2	V3		
1	Nominal Output Voltage	V	+5	+12	-12	+5	+15	-15	+5	+12	-5	
2	Minimum Output Current (*1)	A	1.3	0	0	1.3	0	0	1.3	0	0	
3	Maximum Output Current	A	13.0	5.5	1.0	13.0	4.5	1.0	13.0	5.5	1.0	
4	Maximum Output Power / CH	W	65	66	12.0	65	68	15.0	65	66	5.0	
5	Toatal Allowable Output Power	W	100			100			100			
6	Efficiency (Typ) (*2)	%	72									
7	Input Voltage Range (*3)	-	85 ~ 265VAC (47 ~ 63Hz) or 120 ~ 330VDC									
8	Input Current (100/200VAC) (Typ) (*2)	A	1.4 / 0.7									
9	Inrush Current (Typ) (*2,4)	A	14A at 100VAC, 28A at 200VAC, Ta=25°C, Cold Start									
10	PFHC	-	Built to meet EN61000-3-2									
11	Power Factor (100/200VAC) (Typ) (*2)	-	0.99 / 0.93									
12	Output Voltage Range	-	5.0 - 5.25	Fixed	Fixed	5.0 - 5.25	Fixed	Fixed	5.0 - 5.25	Fixed	Fixed	
13	Output Voltage Accuracy	-	-	±5%	±5%	-	±5%	±5%	-	±5%	±5%	
14	Maximum Ripple & Noise	0 ~ +50°C	mV	120	150	150	120	150	150	120	150	150
		(*5) -10 ~ 0°C	mV	160	180	180	160	180	180	160	180	180
15	Maximum Line Regulation (*6)	mV	20	48	48	20	60	60	20	48	20	
16	Maximum Load Regulation (*7)	mV	40	100	150	40	120	150	40	100	100	
18	Temperature Coefficient	-	V1,V2:Less than 0.02% / °C, V3:Less than 0.03% / °C									
19	Over Current Protection (*8)	A	more than 105%									
20	Over Voltage Protection (*9)	V	5.7 - 7.0	-	-	5.7 - 7.0	-	-	5.7 - 7.0	-	-	
21	Hold-Up Time (Typ) (*10)	-	20 ms									
22	Leakage Current (*11)	-	0.75mA MAX,0.2mA(Typ) at 100VAC / 0.44mA(Typ) at 230VAC									
23	Parallel Operation	-	-									
24	Series Operation	-	-									
25	Operating Temperature (*12)	-	-10 ~ +65°C (-10 ~ +50°C :100%, +65°C :50%)									
26	Operating Humidity	-	30 ~ 90%RH									
27	Storage Temperature	-	-30 ~ +85°C									
28	Storage Humidity	-	10 ~ 95%RH									
29	Cooling	-	Convection Cooling									
30	Withstand Voltage		Input - FG:2kVAC(20mA), Input - Output:3kVAC (20mA) Output - FG:500VAC(100mA), for 1min.									
30	Isolation Resistance	-	More than 100Mohm at 25°C and 70%RH Output - FG...500VDC									
31	Vibration	-	At no operating, 10-55Hz (Sweep for 1min) 2G Constant,X,Y,Z 1hour each.									
32	Shock (In package)	-	Less than 20G									
33	Safety (*13)	-	Built to meet UL1950, CSA950, EN60950, VDE0160 Built to meet DENTORI									
34	Conducted Emission	-	Built to meet EN55011 / EN55022-B, FCC-ClassB, VCCI-B.									
35	Radiated Emission	-	Built to meet EN55011 / EN55022-B, FCC-ClassB, VCCI-B.									
36	Weight (Typ)	g	720									
37	Size (WxHxD)	mm	48 x 92 x 203 (Refer to Outline Drawing)									

*Read instruction manual carefully, before using the power supply unit.


=NOTES=

- *1. For V2, V3 stability, to keep V1 minimum output current.
- *2. At 100/200VAC, Ta=25°C and maximum output power.
- *3. For cases where conformance to various safety specs (UL, CSA, EN) are required, input voltage range will be 100 - 240VAC(50/60Hz).
- *4. No applicable for the in-rush current to Noise Filter less than 0.2ms.
- *5. Measure with EIAJ RC-9131 probe, Bandwidth of scope :100MHz.
- *6. 85 - 265VAC , constant load.
- *7. Minimum load - Full load, constant input voltage.
- *8. Constant current limit with automatic recovery.
- *9. OVP circuit will shut down all outputs, manual reset (Line recycle).
- *10. At 100/200VAC nominal output voltage and maximum total output power.
- *11. Measured by the each measuring method of UL, CSA, EN and DENTORI (at 60Hz), Ta=25°C.
- *12. Ratings - Derating at standard mounting.
 - Load (%) is percent of maximum output power or maximum output current, whichever is greater.
 - As for other mountings, refer to derating curve (A179-01-02).
- *13. As for DENTORI, built to meet at 100VAC.

OUTPUT DERATING

A179-01-02

Ta(°C)	LOAD(%)		
	MOUNTING A	MOUNTING B	MOUNTING C
-10 ~+40	100	100	100
45	100	100	83
50	100	83	67
55	83	67	50
60	67	50	
65	50		

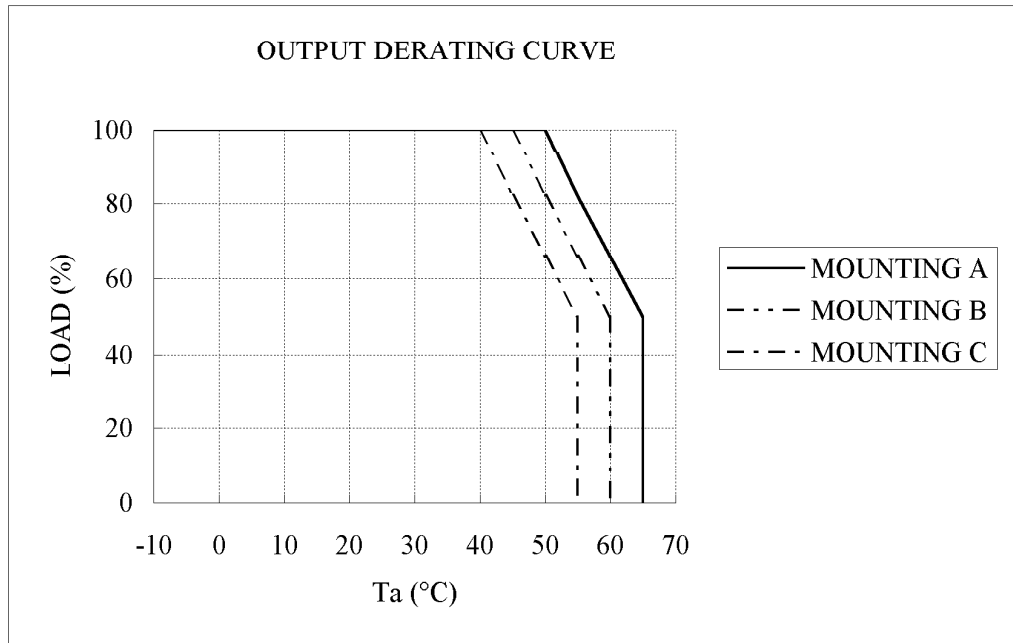

MOUNTING A MOUNTING B MOUNTING C PROHIBIT PROHIBIT

(STANDARD MOUNTING)

