




# TS3404

## PWM Buck Controller

DIP-8



SOP-8



Pin assignment:

1. Out
2. Vcc
3. Comp.
4. FB
5. SCP
6. SS
7. CT
8. Gnd

**Supply Voltage Range 3.6V to 27V****Output Driving Current 200mA****Oscillator Frequency up to 300KHz**

### General Description

The TS3404 integrates Pulse Width Modulation (PWM) control circuit into a single chip, and makes simple work out of implementing a complete control and protection scheme for a DC-DC step-down converter. The TS3404 provides simple feedback loop compensation, 1.25V reference output, error amplifier, adjustable oscillator, soft start, under voltage lock out (UVLO), short circuit protection(SCP) circuitry, and push pull output circuit.

The TS3404 is design for adjustable switching frequency by trimming time capacitor (CT), during low supply voltage situation, the under voltage lock out (UVLO) makes sure that the output are off until the internal circuit operates normally.

The TS3404 is offered in DIP-8 and SOP-8 package.

### Features

- ✧ PWM buck control circuit
- ✧ Operating voltage can be up to 27V
- ✧ Under voltage lock out (UVLO) protection
- ✧ Soft start (SS) circuit
- ✧ Short circuit Protection (SCP)
- ✧ Variable oscillator frequency 300KHz (max)
- ✧ 1.25V voltage reference Output

### Pin Descriptions

Name	Description
Output	PWM Output
Vcc	Supply Voltage
Comp.	Feedback Loop Compensation
FB	Voltage Feedback
SCP	Short Circuit Protection
SS	Soft Start
CT	Timing Capacitor
Gnd	Ground

### Applications

- ✧ LCD Monitor
- ✧ xD-ROM, xDSL product
- ✧ DC to DC converters in computers
- ✧ Backlight inverter

### Ordering Information

Part No.	Operating Temp. (Ambient)	Package
TS3404CS	-20 ~ +85 °C	SOP-8
TS3404CD		DIP-8

### Absolute Maximum Rating

Supply Voltage	$V_{CC}$	28	V
Amplifier Input Voltage	$V_I$	20	V
Collector Output Voltage	$V_O$	$V_{CC} - 1.0V$	V
Source Current	$I_{SOURCE}$	200	mA
Sink Current	$I_{SINK}$	200	mA
Operating Junction Temperature Range	$T_J$	-20 ~ +150	°C
Storage Temperature Range	$T_{STG}$	-65 ~ +150	°C
Lead Temperature 1.6mm(1/16") from case for 10Sec.	$T_{LEAD}$	260	°C



Recommended Operating Conditions						
Parameter	Symbol.	Min.	Max.	Unit		
Supply voltage	$V_{CC}$	3.6	27	V		
Amplifier input voltage	$V_I$	1.05	1.45	V		
Collector output voltage	$V_O$		$V_{CC} \sim 1.5$	V		
Current into feedback terminal	$I_{FB}$		45	uA		
Feedback resistor	$R_F$	100		K $\Omega$		
Timing capacitor	$C_T$	100	6800	pF		
Oscillator frequency	$F_{OSC}$	10	300	KHz		
Electrical Characteristics						
(V <sub>CC</sub> = 6V, f = 200KHz, Ta = 25 °C; unless otherwise specified.)						
Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reference						
Comp. Connect to FB	$V_{REF}$		1.225	1.25	1.275	V
Output voltage change with temperature		Ta = -20 °C ~ 25 °C		- 0.1	1	%
		Ta = 25 °C ~ 85 °C		- 0.2	1	
Under voltage lock out (UVLO)						
Upper threshold Voltage	$V_{UT}$	$I_{O(REF)} = 0.1mA, Ta = 25\text{ }^\circ\text{C}$		2.9		V
Lower threshold voltage	$V_{LWT}$			2.4		
Hysteresis	$V_{HT}$			0.5		
Short circuit protection (SCP)						
Input threshold voltage	$V_{IT}$	Ta = 25 °C	0.60	0.67	0.75	V
Standby voltage	$V_{STB}$	No pull up	100	130	160	mV
Latched input voltage	$V_{LT}$	No pull up		50	100	mV
Input (source) current	$I_{SCP}$	$V_I = 0.7V, Ta = 25\text{ }^\circ\text{C}$	- 10	- 15	- 20	uA
Comparator threshold voltage	$V_{CT}$			1.5		V
Oscillator (OSC)						
Frequency	$F_{OSC}$	$C_T = 270pF$		200		KHz
Standard deviation of frequency	$\Delta F_{OSC}$	$C_T = 270pF$		10		%
Frequency change with voltage		$V_{CC} = 3.6V \sim 20V$		1		
Error Amplifier						
Input offset voltage	$V_{IO}$	$V_O (FB) = 1.25V$			± 6	mV
Input offset current	$I_{IO}$				± 100	nA
Input bias current	$I_{IB}$			160	500	nA
Common mode input voltage range	$V_{CM}$	$V_{CC} = 3.6V \sim 20V$	1.05		1.45	V
Open loop voltage amplification	AV	$R_F = 200k\Omega$	70	80		dB
Unity gain bandwidth	GBW			1.5		MHz
Common mode reject ratio	CMRR		60	80		dB
Max. output voltage	$V_{OH}$		$V_{REF} \sim 0.1$			V
Min. output voltage	$V_{OL}$				1	V
Output (sink) current (Comp)	$I_{OI}$	$V_{ID} = - 0.1V, V_O = 1.25V$	0.5	1.6		mA
Output (source) current (Comp)	$I_{OO}$		- 45	- 70		uA




### Electrical Characteristics (Continued)


( $V_{CC} = 6V$ ,  $f = 200KHz$ ,  $T_a = 25^\circ C$ ; unless otherwise specified.)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>Output section</b>						
Leakage current	$I_{LEAK}$	$V_O = 25V$			10	$\mu A$
Sink current	$I_{DRV}$	$V_{IN} = 20V$		200		mA
Source current		$V_{IN} = 20V$		200		mA
Output saturation voltage	$V_{SAT}$	$I_O = 10mA$		1.0	1.5	V
Short circuit output current	$I_{SC}$	$V_O = 6V$		120		mA
<b>PWM comparator</b>						
Input threshold voltage at $f = 10KHz$ (Comp)	$V_{TO}$	CT		0.6	0.7	V
	$V_{T100}$	Maximum duty cycle	1.2	1.3		
<b>Total device</b>						
Average supply current	$I_{CCA}$	$C_T = 270pF$		6	10	mA
<b>Soft Start</b>						
Soft start voltage	$V_{SS}$			2.3		V
Constant charge current	$I_{SS}$			20		$\mu A$

### Functional Block Diagram

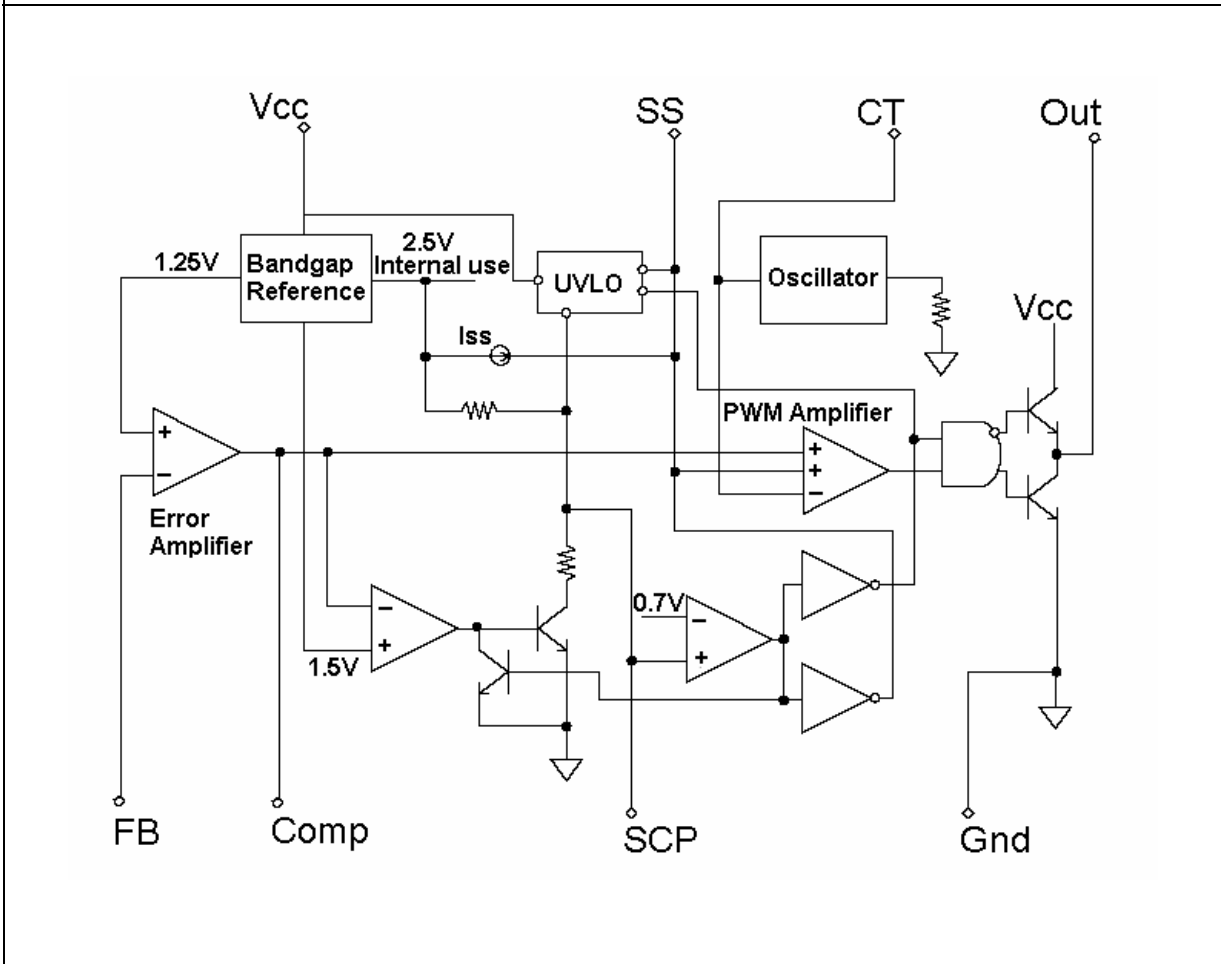

## Typical Application Circuit

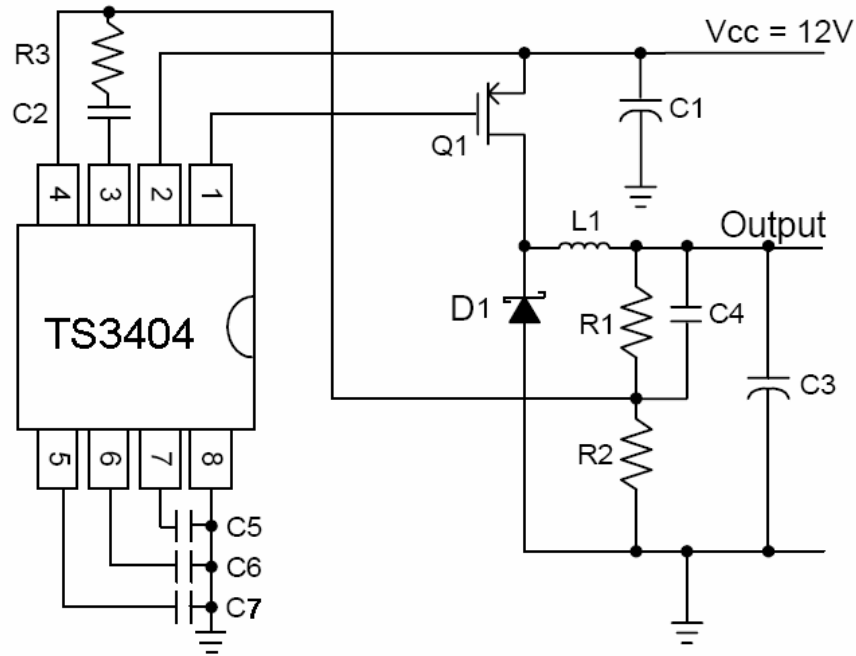

### Step-Down DC/DC converter

Device	Value	Device	Value
C1	470uF	R1	9K, 1/4W
C2	10nF	R2	3K, 1/4W
C3	470uF	R3	10K, 1/4W
C4	50nF	L1	33uH, 3A
C5	270uF	D1	SK34A
C6	50nF	Q1	TSM2301CX
C7	220nF		




Remark:

\* Output =  $1.25V * (R1/R2 + 1) = 1.25V * (9K/3K + 1) = 5V @ 3A$

\* SK34A: Taiwan semiconductor, Schottky 3A/40V in SMA package




\* TSM2301CX: Taiwan semiconductor, P-Channel MOSFET 4A/20V in SOT-23 package

## DIP-8 Mechanical Drawing



DIP-8 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.07	0.32	0.357	0.367
B	6.22	6.48	0.245	0.255
C	3.18	4.43	0.125	0.135
D	0.35	0.49	0.019	0.020
G	2.54 (typ)		0.100 (typ)	
J	0.29	0.31	0.011	0.012
K	3.25	3.35	0.128	0.132
L	7.75	8.00	0.305	0.315
M	-	10°	-	10°

## SOP-8 Mechanical Drawing



SOP-8 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.196
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 (typ)		0.05 (typ)	
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019