





# SMT POWER INDUCTORS

## Power Beads - PA1320NL Series



-  **Current Rating:** Over 75Apk
-  **Inductance Range:** 120nH to 300nH
-  **Height:** 6.5mm Max
-  **Footprint:** 10.4mm x 8.0mm Max


### Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C<sup>7</sup>

| Part Number  | Inductance @0Adc (nH ±20%) | Inductance @Irated (nH TYP) | Irated <sup>1</sup> (Abc) | DCR <sup>2</sup> (mΩ) | Saturation Current <sup>3</sup> (A TYP) |       | Heating Current <sup>4</sup> (A TYP) |
|--------------|----------------------------|-----------------------------|---------------------------|-----------------------|---|-------|--------------------------------------|
|              |                            |                             |                           |                       | 25°C                                    | 100°C |                                      |
| PA1320.121NL | 120                        | 120                         | 40                        | 0.48 ±8%              | 77                                      | 65    | 40                                   |
| PA1320.171NL | 172                        | 160                         | 40                        |                       | 58                                      | 51    |                                      |
| PA1320.221NL | 215                        | 200                         | 40                        |                       | 43                                      | 39    |                                      |
| PA1320.301NL | 310                        | 230                         | 31                        |                       | 31                                      | 27    |                                      |


#### NOTES:

- The rated current as listed is either the saturation current or the heating current depending on which value is lower.
- The nominal DCR tolerance is by design. The nominal DCR is measured from point (a) to point (b), as shown below on the mechanical drawing.
- The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C and 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current is the DC current which causes the part temperature to increase by approximately 40°C. This current is determined by soldering the component on a typical application PCB, and then applying the current to the device for 30 minutes with 25LFM of forced air cooling.
- In high volt\*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the coreloss and temperature rise curves can be used.
- Pulse complies to industry standard tape and reel specification EIA481.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

## Mechanical

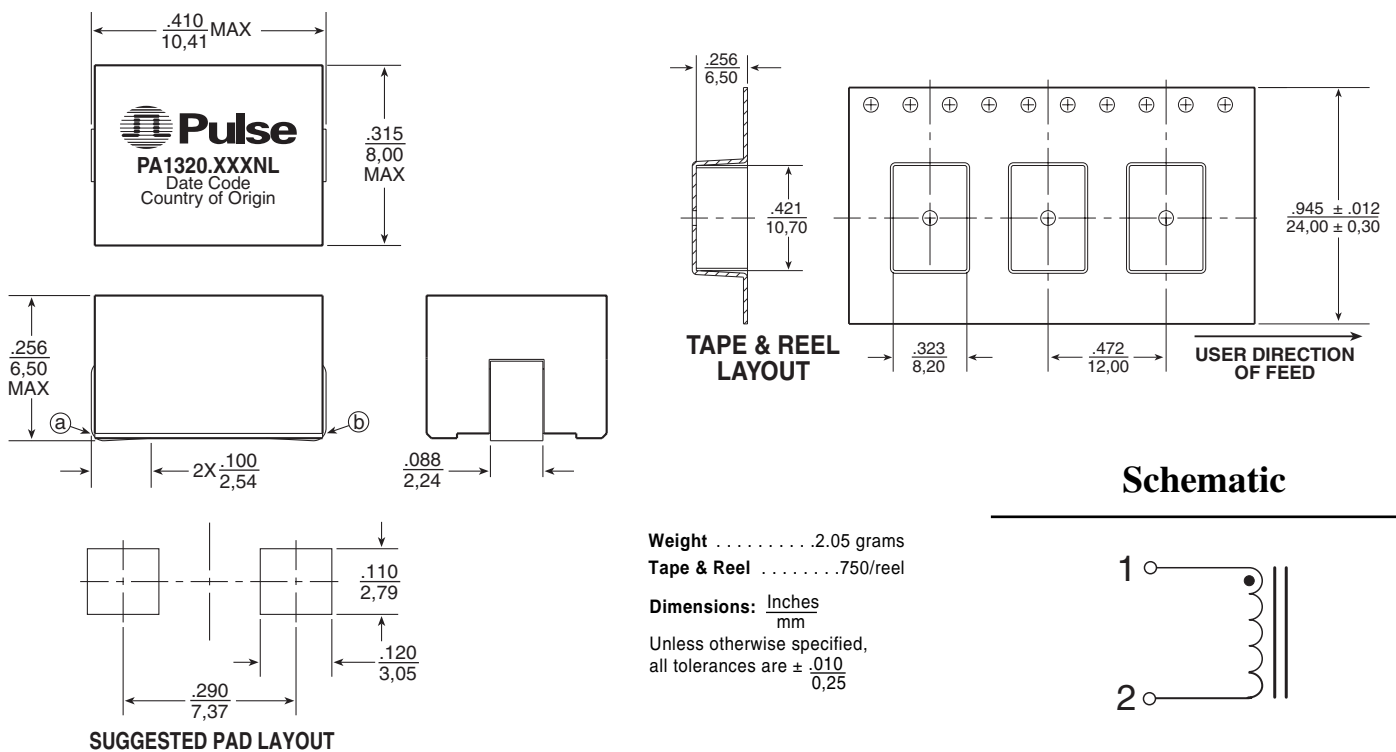

## Schematic




# SMT POWER INDUCTORS


## Power Beads - PA1320NL Series




Typical Inductance vs DC Bias

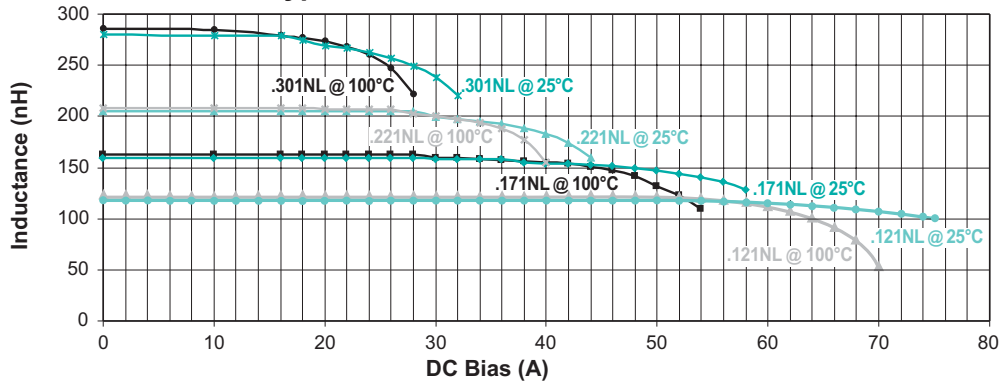

CoreLoss (W)

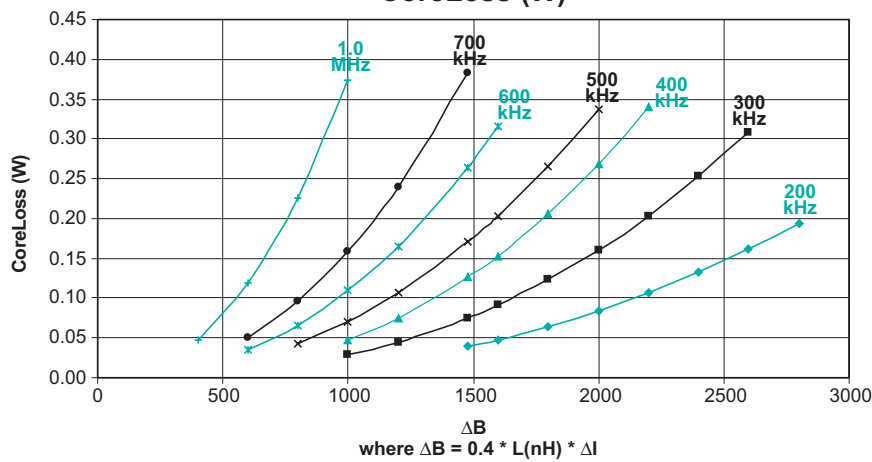

PA1320.XXXNL Temp Rise vs Power Dissipation

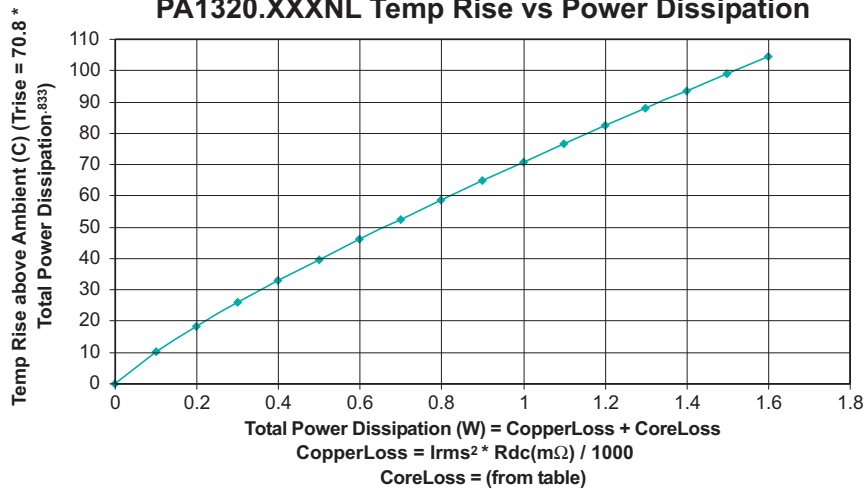

### For More Information:

#### Pulse Worldwide Headquarters

12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.

[www.pulseeng.com](http://www.pulseeng.com)

TEL: 858 674 8100

FAX: 858 674 8262

#### Pulse Europe

Einsteinstrasse 1  
D-71083 Herrenberg  
Germany

Tel: 49 7032 7806 116

Fax: 49 7032 7806 135

#### Pulse China Headquarters

No. 1  
Industrial District  
Changan, Dongguan  
China

Tel: 86 769 85538070

Fax: 86 769 85538870

#### Pulse North China

Room 1503  
XinYin Building  
No. 888 YiShan Rd.  
Shanghai 200233  
China

Tel: 86 21 54643211/2

Fax: 86 21 54643210

#### Pulse South Asia

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324

Tel: 65 6287 8998

Fax: 65 6280 0080

#### Pulse North Asia

No. 26  
Kao Ching Rd.  
Yang Mei Chen  
Taoyuan Hsien  
Taiwan, R. O. C.

Tel: 886 3 4641811

Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

[www.pulseeng.com](http://www.pulseeng.com)

P653.A (11/06)