

TOSHIBA Digital Integrated Circuit Silicon Monolithic

TC7MP3125FK, TC7MP3125FTG

Low Voltage/Low Power 2-Bit × 2 Dual Supply Bus Transceiver

The TC7MP3125FK/FTG is a dual supply, advanced high-speed CMOS 4-bit dual supply voltage interface bus transceiver fabricated with silicon gate CMOS technology.

It is also designed with over voltage tolerant inputs and outputs up to 3.6 V.

Designed for use as an interface between a 1.2-V, 1.5-V, 1.8-V, or 2.5-V bus and a 1.8-V, 2.5-V or 3.6-V bus in mixed 1.2-V, 1.5-V, 1.8-V or 2.5-V/1.8-V, 2.5-V or 3.6-V supply systems.

The A-port interfaces with the 1.2-V, 1.5-V, 1.8-V or 2.5-V bus, the B-port with the 1.8-V, 2.5-V, 3.3-V bus.

The direction of data transmission is determined by the level of the DIR input. The enable input (\overline{OE}) can be used to disable the device so that the buses are effectively isolated.


All inputs are equipped with protection circuits against static discharge or transient excess voltage.

Features

- Bidirectional interface between 1.2-V and 1.8-V, 1.2-V and 2.5-V, 1.2-V and 3.3-V, 1.5-V and 2.5-V, 1.5-V and 3.3-V, 1.8-V and 2.5-V, 1.8-V and 3.3-V or 2.5-V and 3.3-V buses.
- High-speed operation: $t_{pd} = 6.8$ ns (max) (VCCA = 2.5 ± 0.2 V, VCCB = 3.3 ± 0.3 V)
 $t_{pd} = 8.9$ ns (max) (VCCA = 1.8 ± 0.15 V, VCCB = 3.3 ± 0.3 V)
 $t_{pd} = 10.3$ ns (max) (VCCA = 1.5 ± 0.1 V, VCCB = 3.3 ± 0.3 V)
 $t_{pd} = 61$ ns (max) (VCCA = 1.2 ± 0.1 V, VCCB = 3.3 ± 0.3 V)
 $t_{pd} = 9.5$ ns (max) (VCCA = 1.8 ± 0.15 V, VCCB = 2.5 ± 0.2 V)
 $t_{pd} = 10.8$ ns (max) (VCCA = 1.5 ± 0.15 V, VCCB = 2.5 ± 0.2 V)
 $t_{pd} = 60$ ns (max) (VCCA = 1.2 ± 0.15 V, VCCB = 2.5 ± 0.2 V)
 $t_{pd} = 58$ ns (max) (VCCA = 1.2 ± 0.1 V, VCCB = 1.8 ± 0.15 V)
- Output current: $IOH/IOL = \pm 12$ mA (min) (VCC = 3.0 V)
 $IOH/IOL = \pm 9$ mA (min) (VCC = 2.3 V)
 $IOH/IOL = \pm 3$ mA (min) (VCC = 1.65 V)
 $IOH/IOL = \pm 1$ mA (min) (VCC = 1.4 V)
- Latch-up performance: ± 300 mA
- ESD performance: Machine model $\geq \pm 200$ V
Human body model $\geq \pm 2000$ V
- Ultra-small package: VSSOP (US16), VQON16
- Low current consumption: Using the new circuit significantly reduces current consumption when $\overline{OE} = "H"$. Suitable for battery-driven applications such as PDAs and cellular phones.
- Floating A-bus and B-bus are permitted. (when $\overline{OE} = "H"$)
3.6-V tolerant function and power-down protection provided on all inputs and outputs.

Note 1: Do not apply a signal to any bus pins when it is in the output mode. Damage may result.


Note: When mounting VQON package, the type of recommended flux is RA or RMA.

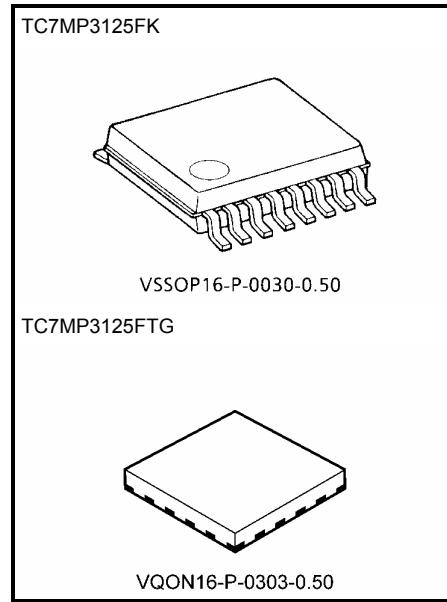


Weight

VSSOP16-P-0030-0.50: 0.02 g (typ.)
VQON16-P-0303-0.50: 0.013 g (typ.)


Pin Assignment (top view)

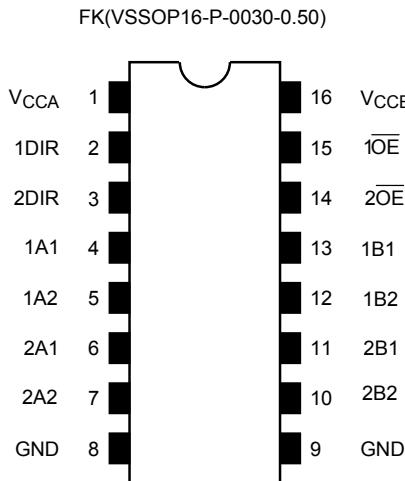

IEC Logic Symbol

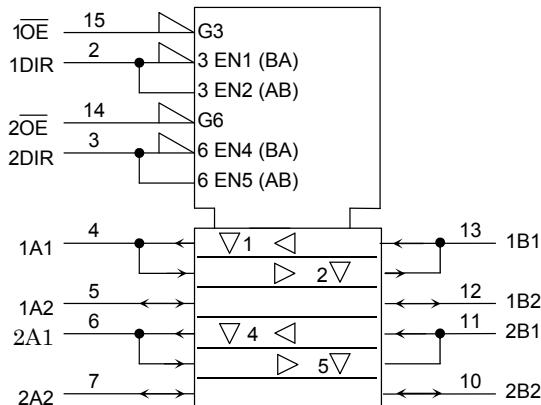

FTG (VQON16-P-0303-0.50)

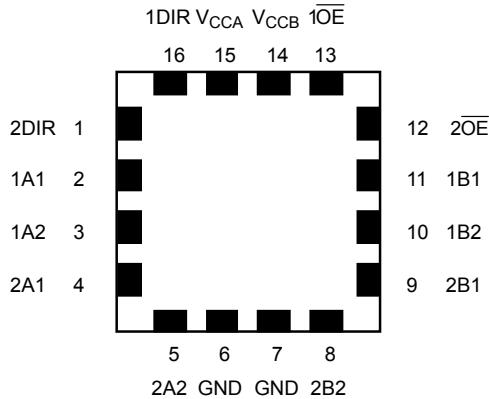

Truth Table


Inputs		Function		Outputs
1OE	1DIR	Bus 1A1-1A2	Bus 1B1-1B2	
L	L	Output	Input	A = B
L	H	Input	Output	B = A
H	X	Z	Z	Z


Inputs		Function		Outputs
2OE	2DIR	Bus 2A1-2A2	Bus 2B1-2B2	
L	L	Output	Input	A = B
L	H	Input	Output	B = A
H	X	Z	Z	Z

X: Don't care

Z: High impedance

Marking

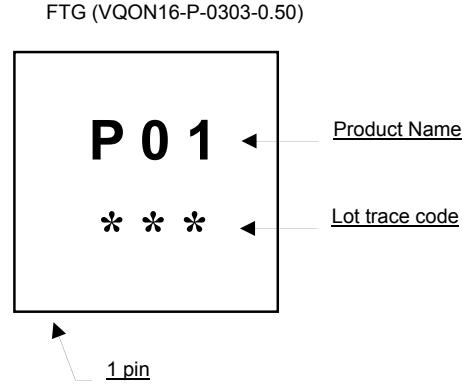

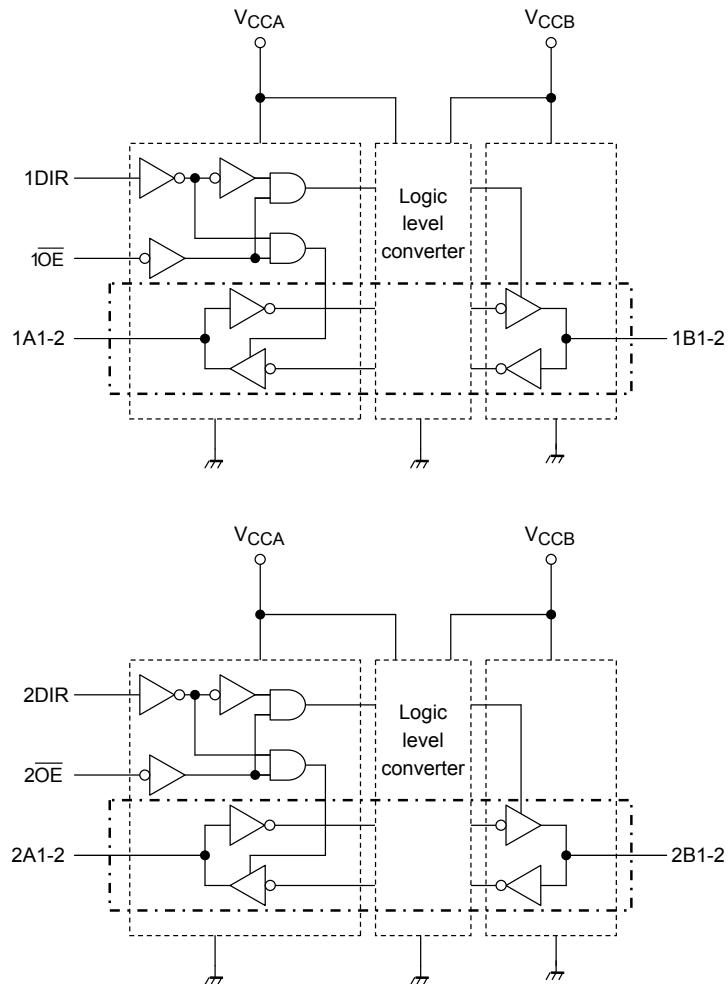Block Diagram

Absolute Maximum Ratings (Note 1)

Characteristics	Symbol	Rating	Unit
Power supply voltage (Note 2)	V _{CCA}	−0.5 to 4.6	V
	V _{CCB}	−0.5 to 4.6	
DC input voltage (DIR, \overline{OE})	V _{IN}	−0.5 to 4.6	V
DC bus I/O voltage	V _{I/OA}	−0.5 to 4.6 (Note 3)	V
		−0.5 to V _{CCA} + 0.5 (Note 4)	
	V _{I/OB}	−0.5 to 4.6 (Note 3)	
		−0.5 to V _{CCB} + 0.5 (Note 4)	
Input diode current	I _{IK}	−50	mA
Output diode current	I _{I/OK}	±50 (Note 5)	mA
DC output current	I _{OUTA}	±25	mA
	I _{OUTB}	±25	
DC V _{CC} /ground current per supply pin	I _{CCA}	±50	mA
	I _{CCB}	±50	
Power dissipation	P _D	180	mW
Storage temperature	T _{stg}	−65 to 150	°C

Note 1: Exceeding any of the absolute maximum ratings, even briefly, lead to deterioration in IC performance or even destruction.

Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 2: Don't supply a voltage to V_{CCB} pin when V_{CCA} is in the OFF state.

Note 3: Output in OFF state

Note 4: High or Low stats. I_{OUT} absolute maximum rating must be observed.

Note 5: V_{OUT} < GND, V_{OUT} > V_{CC}

Operating Ranges (Note 1)

Characteristics	Symbol	Rating	Unit
Power supply voltage (Note 2)	V _{CCA}	1.1 to 2.7	V
	V _{CCB}	1.65 to 3.6	
Input voltage (DIR, \overline{OE})	V _{IN}	0 to 3.6	V
Bus I/O voltage	V _{I/OA}	0 to 3.6 (Note 3)	V
		0 to V _{CCA} (Note 4)	
	V _{I/OB}	0 to 3.6 (Note 3)	
		0 to V _{CCB} (Note 4)	
Output current	I _{OUTA}	± 9 (Note 5)	mA
		± 3 (Note 6)	
		± 1 (Note 7)	
	I _{OUTB}	± 12 (Note 8)	
		± 9 (Note 9)	
		± 3 (Note 10)	
Operating temperature	T _{opr}	-40 to 85	°C
Input rise and fall time	dt/dv	0 to 10 (Note 11)	ns/V

Note 1: The operating ranges must be maintained to ensure the normal operation of the device.
Unused inputs must be tied to either VCC or GND.

Note 2: Don't use in $V_{CCA} > V_{CCB}$

Note 3: Output in OFF state

Note 4: High or low state

Note 5: $V_{CCB} = 2.3$ to 2.7 V

Note 6: $V_{CCB} = 1.65$ to 1.95 V

Note 7: $V_{CCB} = 1.4$ to 1.6 V

Note 8: $V_{CCA} = 3.0$ to 3.6 V

Note 9: $V_{CCA} = 2.3$ to 2.7 V

Note 10: $V_{CCA} = 1.65$ to 1.95 V

Note 11: $V_{IN} = 0.8$ to 2.0 V, $V_{CCA} = 2.5$ V, $V_{CCB} = 3.0$ V

Electrical Characteristics

DC Characteristics ($2.3 \text{ V} \leq V_{CCA} \leq 2.7 \text{ V}$, $2.7 \text{ V} < V_{CCB} \leq 3.6 \text{ V}$)

Characteristics	Symbol	Test Condition	V_{CCA} (V)	V_{CCB} (V)	$T_a = -40 \text{ to } 85^\circ\text{C}$		Unit	
					Min	Max		
H-level input voltage	V_{IHA}	DIR, \overline{OE} , An	2.3 to 2.7	2.7 to 3.6	1.6	—	V	
	V_{IHB}	Bn	2.3 to 2.7	2.7 to 3.6	2.0	—		
L-level input voltage	V_{ILA}	DIR, \overline{OE} , An	2.3 to 2.7	2.7 to 3.6	—	0.7	V	
	V_{ILB}	Bn	2.3 to 2.7	2.7 to 3.6	—	0.8		
H-level output voltage	V_{OHA}	$V_{IN} = V_{IH}$ or V_{IL}	$I_{OHA} = -100 \mu\text{A}$	2.3 to 2.7	2.7 to 3.6	$V_{CCA} - 0.2$	—	V
	V_{OHB}		$I_{OHA} = -9 \text{ mA}$	2.3	2.7 to 3.6	1.7	—	
	V_{OHB}		$I_{OHB} = -100 \mu\text{A}$	2.3 to 2.7	2.7 to 3.6	$V_{CCB} - 0.2$	—	
	V_{OHB}		$I_{OHB} = -12 \text{ mA}$	2.3 to 2.7	3.0	2.2	—	
L-level output voltage	V_{OLA}	$V_{IN} = V_{IH}$ or V_{IL}	$I_{OLA} = 100 \mu\text{A}$	2.3 to 2.7	2.7 to 3.6	—	0.2	V
	V_{OLB}		$I_{OLA} = 9 \text{ mA}$	2.3	2.7 to 3.6	—	0.6	
	V_{OLB}		$I_{OLB} = 100 \mu\text{A}$	2.3 to 2.7	2.7 to 3.6	—	0.2	
	V_{OLB}		$I_{OLB} = 12 \text{ mA}$	2.3 to 2.7	3.0	—	0.55	
3-state output OFF state current	I_{OZA}	$V_{IN} = V_{IH}$ or V_{IL} $V_{OUT} = 0 \text{ to } 3.6 \text{ V}$		2.3 to 2.7	2.7 to 3.6	—	± 2.0	μA
	I_{OZB}	$V_{IN} = V_{IH}$ or V_{IL} $V_{OUT} = 0 \text{ to } 3.6 \text{ V}$		2.3 to 2.7	2.7 to 3.6	—	± 2.0	
Input leakage current	I_{IN}	V_{IN} (DIR, \overline{OE}) = 0 to 3.6 V		2.3 to 2.7	2.7 to 3.6	—	± 1.0	μA
Power-off leakage current	I_{OFF1}	$V_{IN}, V_{OUT} = 0 \text{ to } 3.6 \text{ V}$	0	0	—	2.0	μA	
	I_{OFF2}		2.3 to 2.7	0	—	2.0		
	I_{OFF3}		2.3 to 2.7	Open	—	2.0		
Quiescent supply current	I_{CCA}	$V_{INA} = V_{CCA}$ or GND $V_{INB} = V_{CCB}$ or GND		2.3 to 2.7	2.7 to 3.6	—	2.0	μA
	I_{CCB}	$V_{INA} = V_{CCA}$ or GND $V_{INB} = V_{CCB}$ or GND		2.3 to 2.7	2.7 to 3.6	—	2.0	
	I_{CCA}	$V_{CCA} \leq (V_{IN}, V_{OUT}) \leq 3.6 \text{ V}$		2.3 to 2.7	2.7 to 3.6	—	± 2.0	μA
	I_{CCB}	$V_{CCB} \leq (V_{IN}, V_{OUT}) \leq 3.6 \text{ V}$		2.3 to 2.7	2.7 to 3.6	—	± 2.0	
	I_{CCTB}	$V_{INB} = V_{CCB} - 0.6 \text{ V}$ per input		2.3 to 2.7	2.7 to 3.6	—	750.0	μA

DC Characteristics (1.65 V ≤ V_{CCA} < 2.3 V, 2.7 V < V_{CCB} ≤ 3.6 V)

Characteristics	Symbol	Test Condition	V _{CCA} (V)	V _{CCB} (V)	Ta = -40 to 85°C		Unit	
					Min	Max		
H-level input voltage	V _{IHA}	DIR, \overline{OE} , An	1.65 to 2.3	2.7 to 3.6	$0.65 \times V_{CCA}$	—	V	
	V _{IHB}	Bn	1.65 to 2.3	2.7 to 3.6	2.0	—		
L-level input voltage	V _{ILA}	DIR, \overline{OE} , An	1.65 to 2.3	2.7 to 3.6	—	$0.35 \times V_{CCA}$	V	
	V _{ILB}	Bn	1.65 to 2.3	2.7 to 3.6	—	0.8		
H-level output voltage	V _{OHA}	V _{IN} = V _{IH} or V _{IL}	I _{OHA} = -100 μA	1.65 to 2.3	2.7 to 3.6	$V_{CCA} - 0.2$	V	
			I _{OHA} = -3 mA	1.65	2.7 to 3.6	1.25		
	V _{OHB}		I _{OHB} = -100 μA	1.65 to 2.3	2.7 to 3.6	$V_{CCB} - 0.2$		
			I _{OHB} = -12 mA	1.65 to 2.3	3.0	2.2		
L-level output voltage	V _{OLA}	V _{IN} = V _{IH} or V _{IL}	I _{OLA} = 100 μA	1.65 to 2.3	2.7 to 3.6	—	V	
	V _{OLB}		I _{OLA} = 3 mA	1.65	2.7 to 3.6	—		
			I _{OLB} = 100 μA	1.65 to 2.3	2.7 to 3.6	—		
			I _{OLB} = 12 mA	1.65 to 2.3	3.0	—		
3-state output OFF state current	I _{OZA}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V	1.65 to 2.3	2.7 to 3.6	—	± 2.0	μA	
	I _{OZB}		1.65 to 2.3	2.7 to 3.6	—	± 2.0		
Input leakage current	I _{IN}	V _{IN} (DIR, \overline{OE}) = 0 to 3.6 V	1.65 to 2.3	2.7 to 3.6	—	± 1.0	μA	
Power-off leakage current	I _{OFF1}	V _{IN} , V _{OUT} = 0 to 3.6 V	0	0	—	2.0	μA	
	I _{OFF2}		1.65 to 2.3	0	—	2.0		
	I _{OFF3}		1.65 to 2.3	Open	—	2.0		
Quiescent supply current	I _{CCA}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND	1.65 to 2.3	2.7 to 3.6	—	2.0	μA	
	I _{CCB}		1.65 to 2.3	2.7 to 3.6	—	2.0		
	I _{CCA}	V _{CCA} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V	1.65 to 2.3	2.7 to 3.6	—	± 2.0	μA	
	I _{CCB}		1.65 to 2.3	2.7 to 3.6	—	± 2.0		
	I _{CCTB}	V _{INB} = V _{CCB} - 0.6 V per input	1.65 to 2.3	2.7 to 3.6	—	750.0	μA	

DC Characteristics (1.4 V ≤ V_{CCA} < 1.65 V, 2.7 V < V_{CCB} ≤ 3.6 V)

Characteristics	Symbol	Test Condition	V _{CCA} (V)	V _{CCB} (V)	Ta = -40 to 85°C		Unit	
					Min	Max		
H-level input voltage	V _{IHA}	DIR, \overline{OE} , An	1.4 to 1.65	2.7 to 3.6	$0.65 \times V_{CCA}$	—	V	
	V _{IHB}	Bn	1.4 to 1.65	2.7 to 3.6	2.0	—		
L-level input voltage	V _{ILA}	DIR, \overline{OE} , An	1.4 to 1.65	2.7 to 3.6	—	$0.30 \times V_{CCA}$	V	
	V _{ILB}	Bn	1.4 to 1.65	2.7 to 3.6	—	0.8		
H-level output voltage	V _{OHA}	V _{IN} = V _{IH} or V _{IL}	I _{OHA} = -100 μA	1.4 to 1.65	2.7 to 3.6	$V_{CCA} - 0.2$	V	
			I _{OHA} = -1 mA	1.4	2.7 to 3.6	1.05		
	V _{OHB}		I _{OHB} = -100 μA	1.4 to 1.65	2.7 to 3.6	$V_{CCB} - 0.2$		
			I _{OHB} = -12 mA	1.4 to 1.65	3.0	2.2		
L-level output voltage	V _{O LA}	V _{IN} = V _{IH} or V _{IL}	I _{O LA} = 100 μA	1.4 to 1.65	2.7 to 3.6	—	V	
	V _{O LB}		I _{O LA} = 1 mA	1.4	2.7 to 3.6	—		
			I _{O LB} = 100 μA	1.4 to 1.65	2.7 to 3.6	—		
			I _{O LB} = 12 mA	1.4 to 1.65	3.0	—		
3-state output OFF state current	I _{OZA}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V	—	1.4 to 1.65	2.7 to 3.6	—	μA	
	I _{OZB}		—	—	—	—		
Input leakage current	I _{IN}	V _{IN} (DIR, \overline{OE}) = 0 to 3.6 V	—	1.4 to 1.65	2.7 to 3.6	—	μA	
Power-off leakage current	I _{OFF}	V _{IN} , V _{OUT} = 0 to 3.6 V	0	—	—	2.0	μA	
	I _{OFF}		1.4 to 1.65	0	—	2.0		
	I _{OFF}		1.4 to 1.65	Open	—	2.0		
Quiescent supply current	I _{CCA}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND	—	1.4 to 1.65	2.7 to 3.6	—	μA	
	I _{CCB}		—	—	—	—		
	I _{CCA}	V _{CCA} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V	—	1.4 to 1.65	2.7 to 3.6	—	μA	
	I _{CCB}		—	—	—	—		
	I _{CCTB}	V _{INB} = V _{CCB} - 0.6 V per input	—	1.4 to 1.65	2.7 to 3.6	—	750.0 μA	

DC Characteristics (1.1 V ≤ V_{CCA} < 1.4 V, 2.7 V < V_{CCB} ≤ 3.6 V)

Characteristics	Symbol	Test Condition	V _{CCA} (V)	V _{CCB} (V)	Ta = -40 to 85°C		Unit
					Min	Max	
H-level input voltage	V _{IHA}	DIR, \overline{OE} , An	1.1 to 1.4	2.7 to 3.6	$0.65 \times V_{CCA}$	—	V
	V _{IHB}	Bn	1.1 to 1.4	2.7 to 3.6	2.0	—	
L-level input voltage	V _{ILA}	DIR, \overline{OE} , An	1.1 to 1.4	2.7 to 3.6	—	$0.30 \times V_{CCA}$	V
	V _{ILB}	Bn	1.1 to 1.4	2.7 to 3.6	—	0.8	
H-level output voltage	V _{OHA}	V _{IN} = V _{IH} or V _{IL}	I _{OHA} = -100 μA	1.1 to 1.4	2.7 to 3.6	$V_{CCA} - 0.2$	V
	V _{OHB}		I _{OHB} = -100 μA	1.1 to 1.4	2.7 to 3.6	$V_{CCB} - 0.2$	
			I _{OHB} = -12 mA	1.1 to 1.4	3.0	2.2	
L-level output voltage	V _{OLA}	V _{IN} = V _{IH} or V _{IL}	I _{OLA} = 100 μA	1.1 to 1.4	2.7 to 3.6	—	V
	V _{OLB}		I _{OLB} = 100 μA	1.1 to 1.4	2.7 to 3.6	—	
			I _{OLB} = 12 mA	1.1 to 1.4	3.0	—	
3-state output OFF state current	I _{OZA}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V		1.1 to 1.4	2.7 to 3.6	—	μA
	I _{OZB}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V		1.1 to 1.4	2.7 to 3.6	—	
Input leakage current	I _{IN}	V _{IN} (DIR, \overline{OE}) = 0 to 3.6 V		1.1 to 1.4	2.7 to 3.6	—	± 1.0 μA
Power-off leakage current	I _{OFF1}	V _{IN} , V _{OUT} = 0 to 3.6 V	0	0	—	2.0	μA
	I _{OFF2}		1.1 to 1.4	0	—	2.0	
	I _{OFF3}		1.1 to 1.4	Open	—	2.0	
Quiescent supply current	I _{CCA}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND		1.1 to 1.4	2.7 to 3.6	—	μA
	I _{CCB}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND		1.1 to 1.4	2.7 to 3.6	—	
	I _{CCA}	V _{CCA} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		1.1 to 1.4	2.7 to 3.6	—	μA
	I _{CCB}	V _{CCB} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		1.1 to 1.4	2.7 to 3.6	—	
	I _{CCTB}	V _{INB} = V _{CCA} - 0.6 V per input		1.1 to 1.4	2.7 to 3.6	—	750.0

DC Characteristics (1.65 V ≤ V_{CCA} < 2.3 V, 2.3 V ≤ V_{CCB} ≤ 2.7 V)

Characteristics	Symbol	Test Condition	V _{CCA} (V)	V _{CCB} (V)	Ta = -40 to 85°C		Unit	
					Min	Max		
H-level input voltage	V _{IHA}	DIR, \overline{OE} , An	1.65 to 2.3	2.3 to 2.7	$0.65 \times V_{CCA}$	—	V	
	V _{IHB}	Bn	1.65 to 2.3	2.3 to 2.7	1.6	—		
L-level input voltage	V _{ILA}	DIR, \overline{OE} , An	1.65 to 2.3	2.3 to 2.7	—	$0.35 \times V_{CCB}$	V	
	V _{ILB}	Bn	1.65 to 2.3	2.3 to 2.7	—	0.7		
H-level output voltage	V _{OHA}	V _{IN} = V _{IH} or V _{IL}	I _{OHA} = -100 μA	1.65 to 2.3	2.3 to 2.7	$V_{CCA} - 0.2$	V	
			I _{OHA} = -3 mA	1.65	2.3 to 2.7	1.25		
	V _{OHB}		I _{OHB} = -100 μA	1.65 to 2.3	2.3 to 2.7	$V_{CCB} - 0.2$		
			I _{OHB} = -9 mA	1.65 to 2.3	2.3	1.7		
L-level output voltage	V _{O LA}	V _{IN} = V _{IH} or V _{IL}	I _{O LA} = 100 μA	1.65 to 2.3	2.3 to 2.7	—	V	
	V _{O LB}		I _{O LA} = 3 mA	1.65	2.3 to 2.7	—		
			I _{O LB} = 100 μA	1.65 to 2.3	2.3 to 2.7	—		
			I _{O LB} = 9mA	1.65 to 2.3	2.3	—		
3-state output OFF state current	I _{OZA}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V	1.65 to 2.3	2.3 to 2.7	—	± 2.0	μA	
	I _{OZB}		1.65 to 2.3	2.3 to 2.7	—	± 2.0		
Input leakage current	I _{IN}	V _{IN} (DIR, \overline{OE}) = 0 to 3.6 V	1.65 to 2.3	2.3 to 2.7	—	± 1.0	μA	
Power-off leakage current	I _{OFF}	V _{IN} , V _{OUT} = 0 to 3.6 V	0	0	—	2.0	μA	
	I _{OFF}		1.65 to 2.3	0	—	2.0		
	I _{OFF}		1.65 to 2.3	Open	—	2.0		
Quiescent supply current	I _{CCA}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND	1.65 to 2.3	2.3 to 2.7	—	2.0	μA	
	I _{CCB}		1.65 to 2.3	2.3 to 2.7	—	2.0		
	I _{CCA}	V _{CCA} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V	1.65 to 2.3	2.3 to 2.7	—	± 2.0		
	I _{CCB}		1.65 to 2.3	2.3 to 2.7	—	± 2.0		

DC Characteristics (1.4 V ≤ V_{CCA} < 1.65 V, 2.3 V ≤ V_{CCB} ≤ 2.7 V)

Characteristics	Symbol	Test Condition	V _{CCA} (V)	V _{CCB} (V)	Ta = -40 to 85°C		Unit	
					Min	Max		
H-level input voltage	V _{IHA}	DIR, \overline{OE} , An	1.4 to 1.65	2.3 to 2.7	$0.65 \times V_{CCA}$	—	V	
	V _{IHB}	Bn	1.4 to 1.65	2.3 to 2.7	1.6	—		
L-level input voltage	V _{ILA}	DIR, \overline{OE} , An	1.4 to 1.65	2.3 to 2.7	—	$0.30 \times V_{CCA}$	V	
	V _{ILB}	Bn	1.4 to 1.65	2.3 to 2.7	—	0.7		
H-level output voltage	V _{OHA}	V _{IN} = V _{IH} or V _{IL}	I _{OHA} = -100 μA	1.4 to 1.65	2.3 to 2.7	$V_{CCA} - 0.2$	V	
			I _{OHA} = -1 mA	1.4	2.3 to 2.7	1.05		
	V _{OHB}		I _{OHB} = -100 μA	1.4 to 1.65	2.3 to 2.7	$V_{CCB} - 0.2$		
			I _{OHB} = -9 mA	1.4 to 1.65	2.3	1.7		
L-level output voltage	V _{O LA}	V _{IN} = V _{IH} or V _{IL}	I _{O LA} = 100 μA	1.4 to 1.65	2.3 to 2.7	—	V	
	V _{O LB}		I _{O LA} = 1 mA	1.4	2.3 to 2.7	—		
			I _{O LB} = 100 μA	1.4 to 1.65	2.3 to 2.7	—		
			I _{O LB} = 9mA	1.4 to 1.65	2.3	—		
3-state output OFF state current	I _{OZA}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V	1.4 to 1.65	2.3 to 2.7	—	± 2.0	μA	
	I _{OZB}		1.4 to 1.65	2.3 to 2.7	—	± 2.0		
Input leakage current	I _{IN}	V _{IN} (DIR, \overline{OE}) = 0 to 3.6 V	1.4 to 1.65	2.3 to 2.7	—	± 1.0	μA	
Power-off leakage current	I _{OFF1}	V _{IN} , V _{OUT} = 0 to 3.6 V	0	0	—	2.0	μA	
	I _{OFF2}		1.4 to 1.65	0	—	2.0		
	I _{OFF3}		1.4 to 1.65	Open	—	2.0		
Quiescent supply current	I _{CCA}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND	1.4 to 1.65	2.3 to 2.7	—	2.0	μA	
	I _{CCB}		1.4 to 1.65	2.3 to 2.7	—	2.0		
	I _{CCA}	V _{CCA} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V	1.4 to 1.65	2.3 to 2.7	—	± 2.0		
	I _{CCB}		1.4 to 1.65	2.3 to 2.7	—	± 2.0		

DC Characteristics (1.1 V ≤ V_{CCA} < 1.4 V, 2.3 V ≤ V_{CCB} ≤ 2.7 V)

Characteristics	Symbol	Test Condition	V _{CCA} (V)	V _{CCB} (V)	Ta = -40 to 85°C		Unit
					Min	Max	
H-level input voltage	V _{IHA}	DIR, \overline{OE} , An	1.1 to 1.4	2.3 to 2.7	$0.65 \times V_{CCA}$	—	V
	V _{IHB}	Bn	1.1 to 1.4	2.3 to 2.7	1.6	—	
L-level input voltage	V _{ILA}	DIR, \overline{OE} , An	1.1 to 1.4	2.3 to 2.7	—	$0.30 \times V_{CCA}$	V
	V _{ILB}	Bn	1.1 to 1.4	2.3 to 2.7	—	0.7	
H-level output voltage	V _{OHA}	V _{IN} = V _{IH} or V _{IL}	I _{OHA} = -100 μA	1.1 to 1.4	2.3 to 2.7	$V_{CCA} - 0.2$	V
	V _{OHB}		I _{OHB} = -100 μA	1.1 to 1.4	2.3 to 2.7	$V_{CCB} - 0.2$	
			I _{OHB} = -9 mA	1.1 to 1.4	2.3	1.7	
L-level output voltage	V _{O LA}	V _{IN} = V _{IH} or V _{IL}	I _{O LA} = 100 μA	1.1 to 1.4	2.3 to 2.7	—	V
	V _{O LB}		I _{O LB} = 100 μA	1.1 to 1.4	2.3 to 2.7	—	
			I _{O LB} = 9 mA	1.1 to 1.4	2.3	—	
3-state output OFF state current	I _{OZA}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V		1.1 to 1.4	2.3 to 2.7	—	μA
	I _{OZB}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V		1.1 to 1.4	2.3 to 2.7	—	
Input leakage current	I _{IN}	V _{IN} (DIR, \overline{OE}) = 0 to 3.6 V		1.1 to 1.4	2.3 to 2.7	—	±1.0 μA
Power-off leakage current	I _{OFF1}	V _{IN} , V _{OUT} = 0 to 3.6 V	0	0	—	2.0	μA
	I _{OFF2}		1.1 to 1.4	0	—	2.0	
	I _{OFF3}		1.1 to 1.4	Open	—	2.0	
Quiescent supply current	I _{CCA}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND		1.1 to 1.4	2.3 to 2.7	—	2.0 μA
	I _{CCB}	V _{INA} = V _{CCA} or GND V _{INB} = V _{CCB} or GND		1.1 to 1.4	2.3 to 2.7	—	
	I _{CCA}	V _{CCA} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		1.1 to 1.4	2.3 to 2.7	—	±2.0 μA
	I _{CCB}	V _{CCB} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		1.1 to 1.4	2.3 to 2.7	—	

DC Characteristics (1.1 V ≤ V_{CCA} < 1.4 V, 1.65 V ≤ V_{CCB} < 2.3 V)

Characteristics	Symbol	Test Condition	V _{CCA} (V)	V _{CCB} (V)	Ta = -40 to 85°C		Unit
					Min	Max	
H-level input voltage	V _{IHA}	DIR, \overline{OE} , An	1.1 to 1.4	1.65 to 2.3	$0.65 \times V_{CCAB}$	—	V
	V _{IHB}	Bn	1.1 to 1.4	1.65 to 2.3	$0.65 \times V_{CC}$	—	
L-level input voltage	V _{ILA}	DIR, \overline{OE} , An	1.1 to 1.4	1.65 to 2.3	—	$0.30 \times V_{CCA}$	V
	V _{ILB}	Bn	1.1 to 1.4	1.65 to 2.3	—	$0.35 \times V_{CCB}$	
H-level output voltage	V _{OHA}	$V_{IN} = V_{IH}$ or V_{IL}	I _{OHA} = -100 μA	1.1 to 1.4	1.65 to 2.3	$V_{CCA} - 0.2$	V
	V _{OHB}		I _{OHB} = -100 μA	1.1 to 1.4	1.65 to 2.3	$V_{CCB} - 0.2$	
			I _{OHB} = -3 mA	1.1 to 1.4	1.65	1.25	
L-level output voltage	V _{OLA}	$V_{IN} = V_{IH}$ or V_{IL}	I _{OLA} = 100 μA	1.1 to 1.4	1.65 to 2.3	—	V
	V _{OLB}		I _{OLB} = 100 μA	1.1 to 1.4	1.65 to 2.3	—	
			I _{OLB} = 3 mA	1.1 to 1.4	1.65	—	
3-state output OFF state current	I _{OZA}	$V_{IN} = V_{IH}$ or V_{IL} $V_{OUT} = 0$ to 3.6 V	1.1 to 1.4	1.65 to 2.3	—	± 2.0	μA
	I _{OZB}	$V_{IN} = V_{IH}$ or V_{IL} $V_{OUT} = 0$ to 3.6 V	1.1 to 1.4	1.65 to 2.3	—	± 2.0	
Input leakage current	I _{IN}	V_{IN} (DIR, \overline{OE}) = 0 to 3.6 V	1.1 to 1.4	1.65 to 2.3	—	± 1.0	μA
Power-off leakage current	I _{OFF1}	$V_{IN}, V_{OUT} = 0$ to 3.6 V	0	0	—	2.0	μA
	I _{OFF2}		1.1 to 1.4	0	—	2.0	
	I _{OFF3}		1.1 to 1.4	Open	—	2.0	
Quiescent supply current	I _{CCA}	$V_{INA} = V_{CCA}$ or GND $V_{INB} = V_{CCB}$ or GND	1.1 to 1.4	1.65 to 2.3	—	2.0	μA
	I _{CCB}	$V_{INA} = V_{CCA}$ or GND $V_{INB} = V_{CCB}$ or GND	1.1 to 1.4	1.65 to 2.3	—	2.0	
	I _{CCA}	$V_{CCA} \leq (V_{IN}, V_{OUT}) \leq 3.6$ V	1.1 to 1.4	1.65 to 2.3	—	± 2.0	μA
	I _{CCB}	$V_{CCB} \leq (V_{IN}, V_{OUT}) \leq 3.6$ V	1.1 to 1.4	1.65 to 2.3	—	± 2.0	

AC Characteristics (Ta = -40 to 85°C, Input: t_r = t_f = 2.0 ns)**V_{CCA} = 2.5 ± 0.2 V, V_{CCB} = 3.3 ± 0.3 V**

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	5.4	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	8.4	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	6.7	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	6.8	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	8.7	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	3.9	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	0.5	ns

Note: Parameter guaranteed by design.

(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)

V_{CCA} = 1.8 ± 0.15 V, V_{CCB} = 3.3 ± 0.3 V

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	8.9	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	13.4	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	10.9	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	7.8	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	10.7	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	5.2	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	0.5	ns

Note: Parameter guaranteed by design.

(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)

V_{CCA} = 1.5 ± 0.1 V, V_{CCB} = 3.3 ± 0.3 V

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	10.3	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	18.5	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	13.0	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	8.6	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	14.3	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	6.6	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	1.5	ns

Note: Parameter guaranteed by design.

$$(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)$$

V_{CCA} = 1.2 ± 0.1 V, V_{CCB} = 3.3 ± 0.3 V

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	61	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	95	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	44	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	22	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	52	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	18	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	1.5	ns

Note: Parameter guaranteed by design.

$$(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)$$

V_{CCA} = 1.8 ± 0.15 V, V_{CCB} = 2.5 ± 0.2 V

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	9.1	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	13.5	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	11.8	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	9.5	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	12.6	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	5.1	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	0.5	ns

Note: Parameter guaranteed by design.

$$(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)$$

V_{CCA} = 1.5 ± 0.1 V, V_{CCB} = 2.5 ± 0.2 V

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	10.8	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	18.3	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	14.2	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	10.5	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	15.4	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	6.4	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	1.5	ns

Note: Parameter guaranteed by design.

$$(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)$$

V_{CCA} = 1.2 ± 0.1 V, V_{CCB} = 2.5 ± 0.2 V

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	60	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	95	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	45	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	23	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	54	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	17	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	1.5	ns

Note: Parameter guaranteed by design.

$$(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)$$

V_{CCA} = 1.2 ± 0.1 V, V_{CCB} = 1.8 ± 0.15 V

Characteristics	Symbol	Test Condition	Min	Max	Unit
Propagation delay time (Bn → An)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	58	ns
3-state output enable time (OĒ → An)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	92	
3-state output disable time (OĒ → An)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	47	
Propagation delay time (An → Bn)	t _{pLH} t _{pHL}	Figure 1, Figure 2	1.0	30	ns
3-state output enable time (OĒ → Bn)	t _{pZL} t _{pZH}	Figure 1, Figure 3	1.0	55	
3-state output disable time (OĒ → Bn)	t _{pLZ} t _{pHZ}	Figure 1, Figure 3	1.0	17	
Output to output skew	t _{osLH} t _{osHL}	(Note)	—	1.5	ns

Note: Parameter guaranteed by design.

$$(tosLH = |t_{pLHm} - t_{pLHn}|, tosHL = |t_{pHLm} - t_{pHLn}|)$$

Dynamic Switching Characteristics ($T_a = 25^\circ\text{C}$, Input: $t_r = t_f = 2.0 \text{ ns}$, $C_L = 30 \text{ pF}$)

Characteristics		Symbol	Test Condition	$V_{CCA} (\text{V})$	$V_{CCB} (\text{V})$	Typ.	Unit		
				$V_{CCA} (\text{V})$	$V_{CCB} (\text{V})$				
Quiet output maximum dynamic V_{OL}	A → B	V_{OLP}	$V_{IH} = V_{CC}, V_{IL} = 0 \text{ V}$ (Note)	2.5	3.3	0.8	V		
				1.8	3.3	0.8			
				1.8	2.5	0.6			
	B → A			2.5	3.3	0.6			
				1.8	3.3	0.25			
				1.8	2.5	0.25			
Quiet output minimum dynamic V_{OL}	A → B	V_{OLV}	$V_{IH} = V_{CC}, V_{IL} = 0 \text{ V}$ (Note)	2.5	3.3	-0.8	V		
				1.8	3.3	-0.8			
				1.8	2.5	-0.6			
	B → A			2.5	3.3	-0.6			
				1.8	3.3	-0.25			
				1.8	2.5	-0.25			
Quiet output maximum dynamic V_{OH}	A → B	V_{OHP}	$V_{IH} = V_{CC}, V_{IL} = 0 \text{ V}$ (Note)	2.5	3.3	4.6	V		
				1.8	3.3	4.6			
				1.8	2.5	3.3			
	B → A			2.5	3.3	3.3			
				1.8	3.3	2.3			
				1.8	2.5	2.3			
Quiet output minimum dynamic V_{OH}	A → B	V_{OHV}	$V_{IH} = V_{CC}, V_{IL} = 0 \text{ V}$ (Note)	2.5	3.3	2.0	V		
				1.8	3.3	2.0			
				1.8	2.5	1.7			
	B → A			2.5	3.3	1.7			
				1.8	3.3	1.3			
				1.8	2.5	1.3			

Note: Parameter guaranteed by design.

Capacitive Characteristics ($T_a = 25^\circ\text{C}$)


Characteristics	Symbol	Test Circuit		$V_{CCA} (\text{V})$	$V_{CCB} (\text{V})$	Typ.	Unit
Input capacitance	C_{IN}	DIR, \overline{OE}		2.5	3.3	7	pF
Bus I/O capacitance	$C_{I/O}$	An, Bn		2.5	3.3	8	pF
Power dissipation capacitance (Note)	C_{PDA}	$\overline{OE} = "L"$	A → B (DIR = "H")	2.5	3.3	3	pF
		$\overline{OE} = "L"$	B → A (DIR = "L")	2.5	3.3	16	
		$\overline{OE} = "H"$	A → B (DIR = "H")	2.5	3.3	0	
		$\overline{OE} = "H"$	B → A (DIR = "L")	2.5	3.3	0	
	C_{PDB}	$\overline{OE} = "L"$	A → B (DIR = "H")	2.5	3.3	16	pF
		$\overline{OE} = "L"$	B → A (DIR = "L")	2.5	3.3	5	
		$\overline{OE} = "H"$	A → B (DIR = "H")	2.5	3.3	0	
		$\overline{OE} = "H"$	B → A (DIR = "L")	2.5	3.3	0	

Note: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:

$$I_{CC} (\text{opr}) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/4 \text{ (per bit)}$$

AC Test Circuit


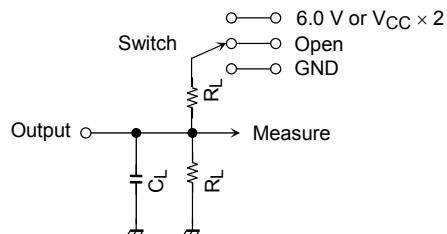


Parameter	Switch
t_{PLH}, t_{PHL}	Open
t_{PLZ}, t_{PZL}	6.0 V @ $V_{CC} = 3.3 \pm 0.3$ V $V_{CC} \times 2$ @ $V_{CC} = 2.5 \pm 0.2$ V @ $V_{CC} = 1.8 \pm 0.15$ V @ $V_{CC} = 1.5 \pm 0.1$ V @ $V_{CC} = 1.2 \pm 0.1$ V
t_{PHZ}, t_{PZH}	GND

Symbol	V _{CC} (output)			
	3.3 ± 0.3 V 2.5 ± 0.2 V	1.8 ± 0.15 V	1.5 ± 0.1 V	1.2 ± 0.1 V
R_L	500 Ω	1 kΩ	2 kΩ	10 kΩ
C_L	30 pF	30 pF	15 pF	15 pF

Figure 1

AC Waveform

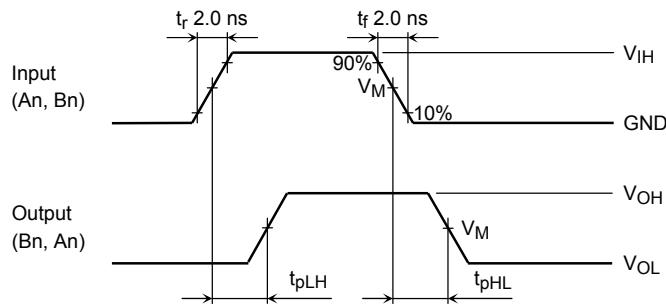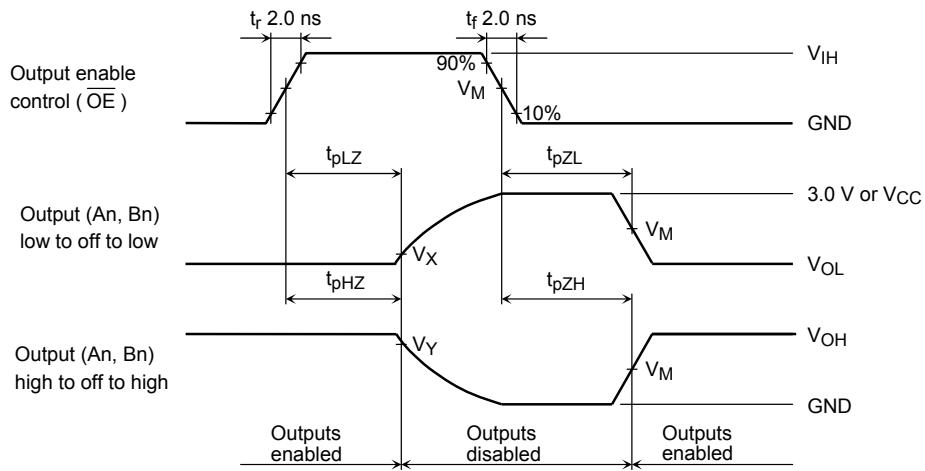
Figure 2 t_{pLH} , t_{pHL} Figure 3 t_{pLZ} , t_{pHZ} , t_{pZL} , t_{pZH}

Symbol	V_{CC}		
	$3.3 \pm 0.3 \text{ V}$	$2.5 \pm 0.2 \text{ V}$	$1.5 \pm 0.1 \text{ V}$
V_{IH}	2.7 V	V_{CC}	V_{CC}
V_M	1.5 V	$V_{CC}/2$	$V_{CC}/2$
V_X	$V_{OL} + 0.3 \text{ V}$	$V_{OL} + 0.15 \text{ V}$	$V_{OL} + 0.1 \text{ V}$
V_Y	$V_{OH} - 0.3 \text{ V}$	$V_{OH} - 0.15 \text{ V}$	$V_{OH} - 0.1 \text{ V}$

Package Dimensions

VSSOP16-P-0030-0.50

Unit : mm

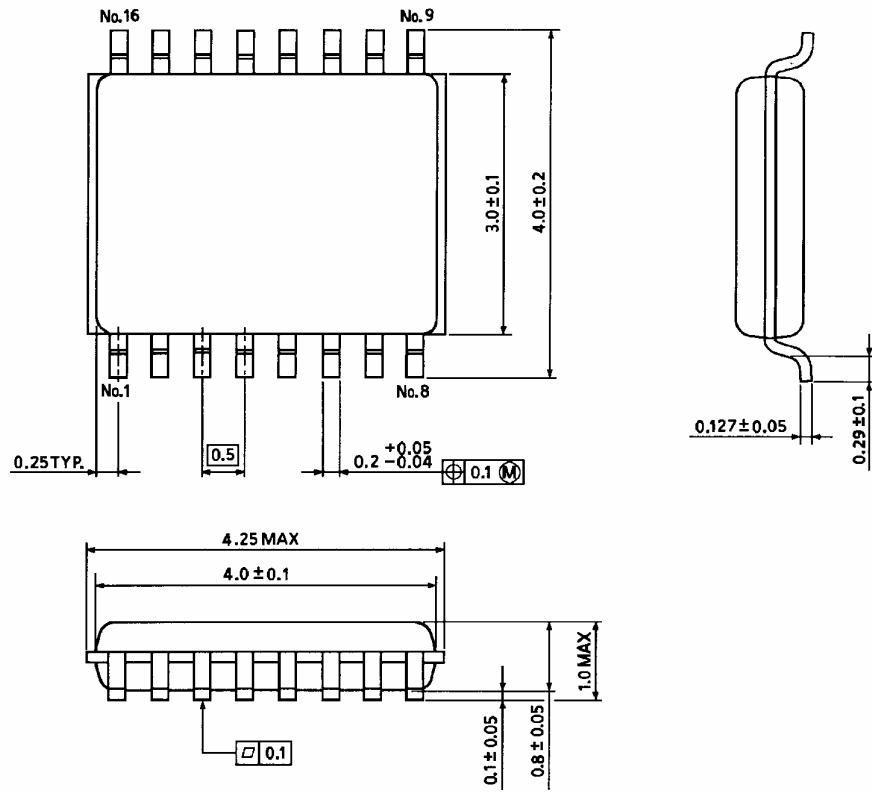


Weight: 0.02 g (typ.)

Package Dimensions

VQON16-P-0303-0.50

Unit: mm

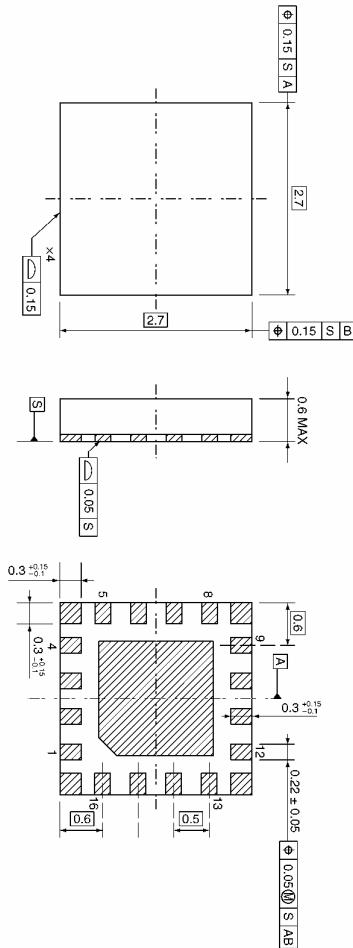

Weight: 0.013 g (typ.)

RESTRICTIONS ON PRODUCT USE

20070701-EN GENERAL

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.