

# LM715

## High Speed Operational Amplifier

### General Description

The LM715 is a high speed, high gain, monolithic operational amplifier intended for use in a wide range of applications where fast signal acquisition or wide bandwidth is required. The LM715 features fast settling time, high slew rate, low offsets, and high output swing for large signal applications. In addition, the device displays excellent temperature stability and will operate over a wide range of supply voltages.


### Features

- High slew rate— 100 V/ $\mu$ s (Inverting,  $A_V = 1$ ) typically
- Fast settling time— 800 ns typically
- Wide bandwidth— 65 MHz typically
- Wide operating supply range
- Wide input voltage ranges


### Applications

- Video amplifiers
- Active filters
- High speed data conversion

### Connection Diagrams



Lead 5 connected to case.

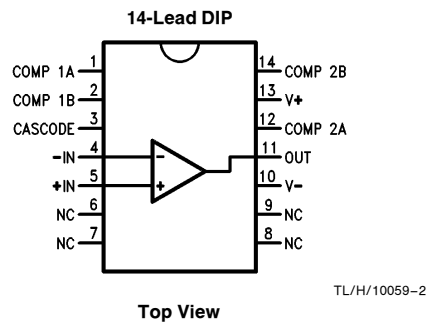

### Ordering Information

Device Code	Package Code	Package Description
LM715MH	H10C	Metal
LM715CH	H10C	Metal
LM715MJ	J14A	Ceramic DIP
LM715CJ	J14A	Ceramic DIP

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature Range	-65°C to +175°C
Operating Temperature Range	
Extended (LM715M)	-55°C to +125°C
Commercial (LM715C)	0°C to +70°C
Lead Temperature	
Metal Can and Ceramic DIP	
(Soldering, 60 sec.)	300°C

Internal Power Dissipation (Notes 1, 2)

10L-Metal Can	1.07W
14L-Ceramic DIP	1.36W
Supply Voltage	±18V
Differential Input Voltage	±5V
Input Voltage (Note 3)	±15V

## LM715M and LM715C

### Electrical Characteristics $T_A = 25^\circ\text{C}$ , $V_{CC} = \pm 15\text{V}$ , unless otherwise specified

Symbol	Parameter	Conditions	LM715M			LM715C			Units
			Min	Typ	Max	Min	Typ	Max	
$V_{IO}$	Input Offset Voltage	$R_S \leq 10\text{ k}\Omega$		2.0	5.0		2.0	7.5	mV
$I_{IO}$	Input Offset Current			70	250		70	250	nA
$I_{IB}$	Input Bias Current			400	750		400	1500	nA
$Z_I$	Input Impedance			1.0			1.0		M $\Omega$
$R_O$	Output Resistance			75			75		$\Omega$
$I_{CC}$	Supply Current			5.5	7.0		5.5	10	mA
$P_C$	Power Consumption			165	210		165	300	mW
$V_{IR}$	Input Voltage Range		±10	±12		±10	±12		V
$A_{VS}$	Large Signal Voltage Gain	$R_L \geq 2.0\text{ k}\Omega$ , $V_O = \pm 10\text{V}$	15	30		10	30		V/mV
$V$	Settling Time	$V_O = \pm 5.0\text{V}$ , $A_V = 1.0$		800			800		ns
TR	Transient Response	Rise Time		30	60		30	75	ns
		Overshoot		25	40		25	50	%
SR	Slew Rate	$A_V = 100$		70			70		V/ $\mu\text{s}$
		$A_V = 10$		38			38		
		$A_V = 1.0$ (Non-Inverting)	15	18		10	18		
		$A_V = 1.0$ (Inverting)		100			100		

The following specifications apply over the range of  $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$  for the LM715M, and  $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$  for the LM715C

Symbol	Parameter	Conditions	LM715M			LM715C			Units
			Min	Typ	Max	Min	Typ	Max	
$V_{IO}$	Input Offset Voltage	$R_S \leq 10\text{ k}\Omega$			7.5			10	mV
$I_{IO}$	Input Offset Current	$T_A = T_{A\text{ Max}}$			250			250	nA
		$T_A = T_{A\text{ Min}}$			800			750	
$I_{IB}$	Input Bias Current	$T_A = T_{A\text{ Max}}$			0.75			1.5	$\mu\text{A}$
		$T_A = T_{A\text{ Min}}$			4.0			7.5	
CMR	Common Mode Rejection	$R_S \leq 10\text{ k}\Omega$	74	92		74 (Note 4)	92 (Note 4)		dB
PSRR	Power Supply Rejection Ratio	$R_S \leq 10\text{ k}\Omega$		45	300		45 (Note 4)	400 (Note 4)	$\mu\text{V}/\text{V}$
$A_{VS}$	Large Signal Voltage Gain	$R_L \geq 2.0\text{ k}\Omega$ , $V_O = \pm 10\text{V}$	10			8			V/mV
$V_{OP}$	Output Voltage Swing	$R_L = 2.0\text{ k}\Omega$	±10	±13		±10	±13		V













Note 1:  $T_{J\text{ Max}} = 175^\circ\text{C}$ .

Note 2: Ratings apply to ambient temperature at  $25^\circ\text{C}$ . Above this temperature, derate the 10L-Metal Can at  $7.1\text{ mW}/^\circ\text{C}$ , and the 14L-Ceramic DIP at  $9.1\text{ mW}/^\circ\text{C}$ .

Note 3: For supply voltages less than  $\pm 15\text{V}$ , the absolute maximum input voltage is equal to the supply voltage.

Note 4:  $T_A = 25^\circ\text{C}$  only.

# Typical Performance Characteristics for LM715M and LM715C

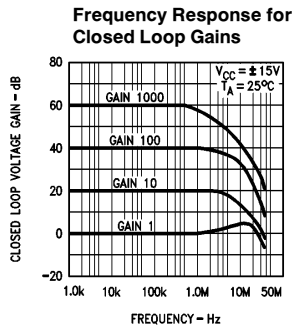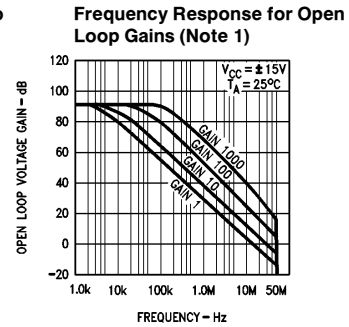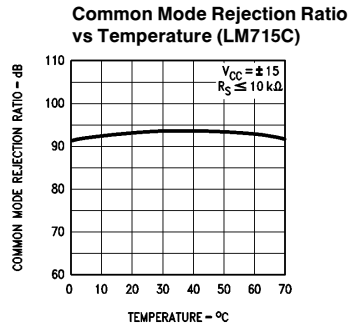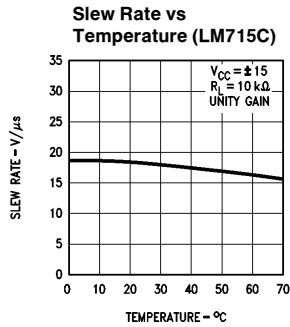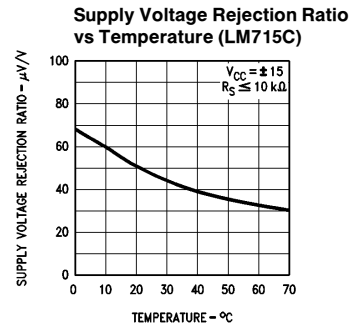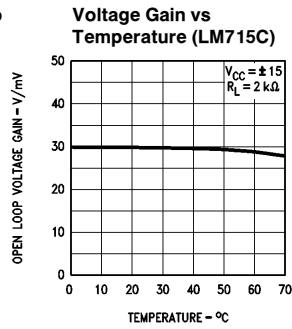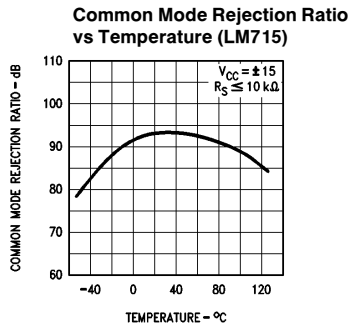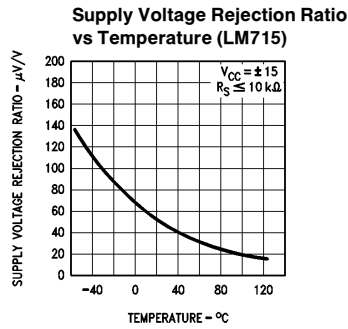


Note 1: See "Non-Inverting Compensation Components Value Table" for Closed Loop Gain values.


TL/H/10059-4

## Typical Performance Characteristics for LM715M and LM715C (Continued)


**Output Swing vs Frequency for Closed Loop Gains**




**Supply Voltage Rejection Ratio vs Frequency**




**Common Mode Rejection Ratio vs Frequency**




**Unity Gain Large Signal Pulse Response**

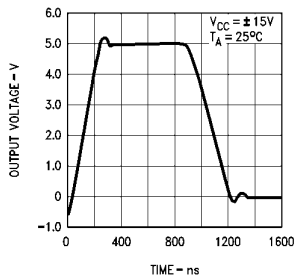


**Large Signal Pulse Response for Gain 10**

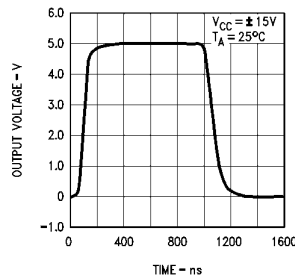


**Large Signal Pulse Response for Gain 100**

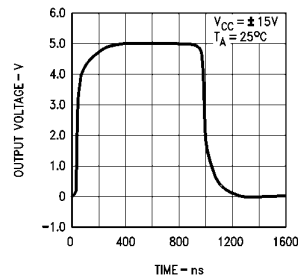


**Slew Rate vs Closed Loop Voltage Gain**

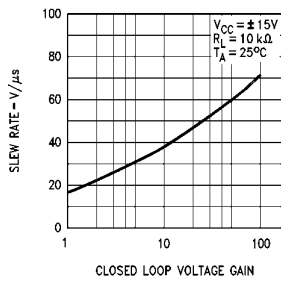


**Slew Rate vs Supply Voltage**




**Voltage Follower Transient Response**

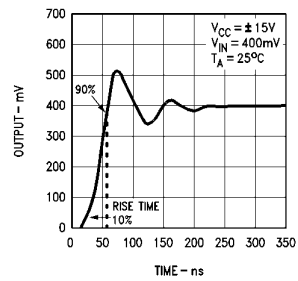

**Inverting Unity Gain Large Signal Pulse Response**




**Small Signal Pulse Response Inverting Unity Gain**

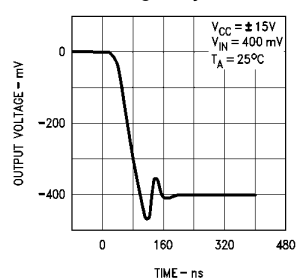

TL/H/10059-5


## Typical Performance Characteristics for LM715M and LM715C (Continued)

Voltage Follower (Note 2)




TL/H/10059-6

Voltage Offset Null Circuit (Note 2)



TL/H/10059-7


High Slew Rate Circuit (Note 2)



TL/H/10059-8

Note 2: Lead numbers apply to metal package.

## Equivalent Circuit

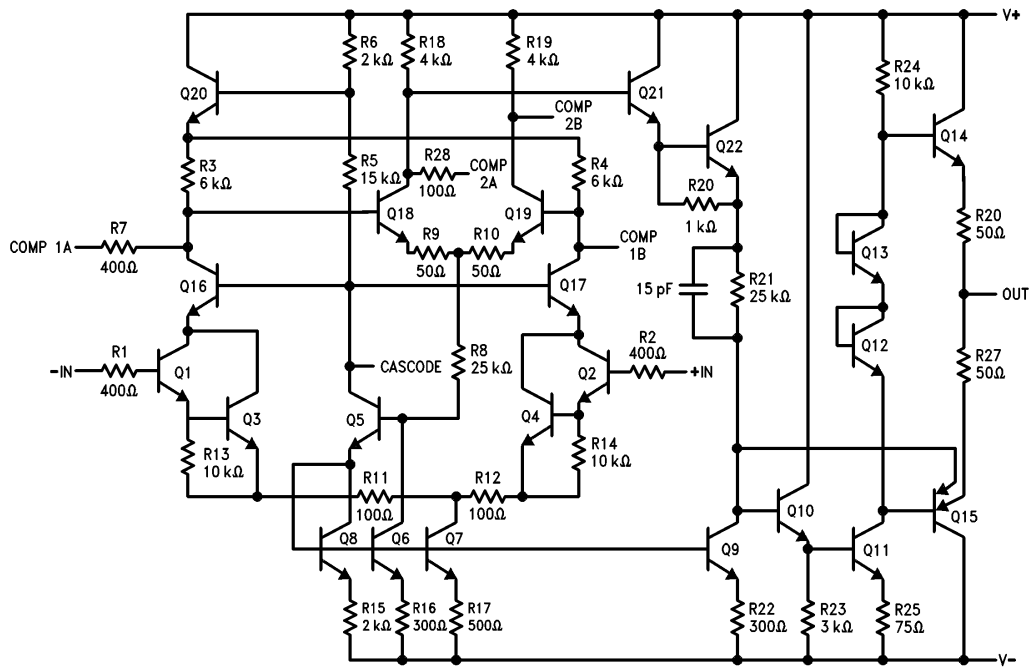

TL/H/10059-3


## Applications Information

### Non-Inverting Compensation Components Values

Closed Loop Gain	C1	C2	C3
1000	10 pF		
100	50 pF		250 pF
10 (Note)	100 pF	500 pF	1000 pF
1	500 pF	2000 pF	1000 pF


**Note:** For gain 10, compensation may be simplified by removing C2, C3 and adding a 200 pF capacitor (C4) between Lead 7 and 10.

### Frequency Compensation Circuit



TL/H/10059-9

### Suggested Values of Compensation Capacitors vs Closed Loop Voltage Gain

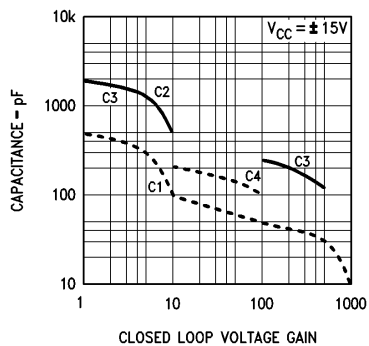

TL/H/10059-10

## Layout Instructions

**Layout**—The layout should be such that stray capacitance is minimal.


**Supplies**—The supplies should be adequately bypassed. Used of 0.1  $\mu$ F high quality ceramic capacitors is recommended.

**Note:** All lead numbers on this page apply to metal package.

**Ring**ing—Excessive ringing (long acquisition time) may occur with large capacitive loads. This may be reduced by isolating the capacitive load with a resistance of 100 $\Omega$ . Large source resistances may also give rise to the same problem and this may be decreased by the addition of a capacitance across the feedback resistance. A value of around 50 pF for unity gain configuration and around 3.0 pF for gain 10 should be adequate.


**Latch Up**—This may occur when the amplifier is used as a voltage follower. The inclusion of a diode between leads 6 and 2 with the cathode toward lead 2 is the recommended preventive measure.

## Typical Applications

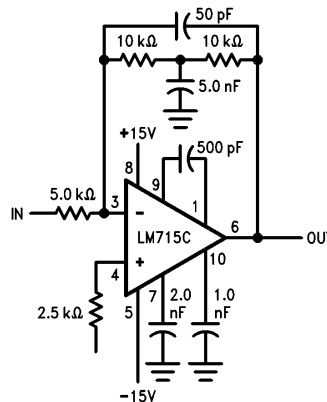


TL/H/10059-14

### High Speed Integrator

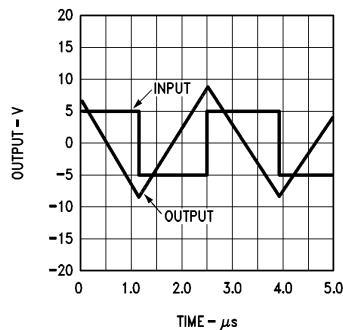

TL/H/10059-13


## Typical Applications (Continued)

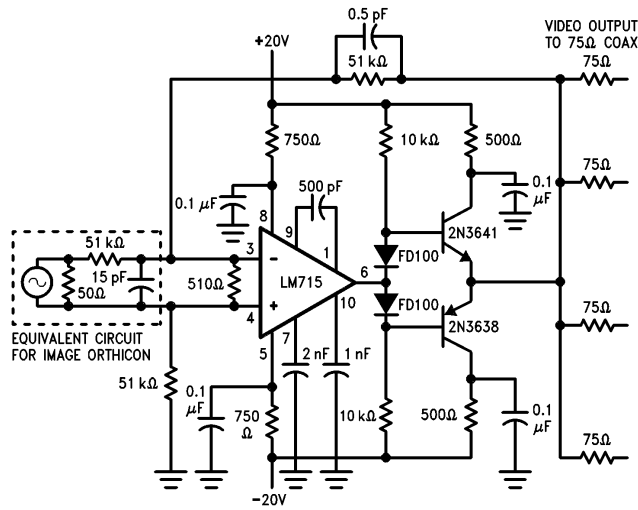


TL/H/10059-12

Note: All lead numbers shown refer to metal package.

## Wide Band Video Amplifier Drive Capability with 75Ω Coax Cable

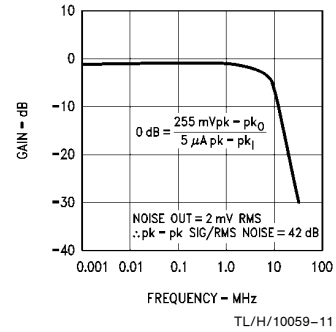


## Physical Dimensions inches (millimeters)

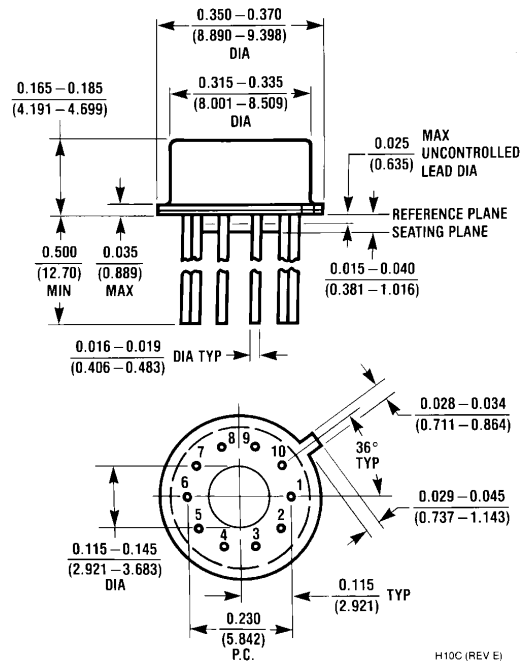

10-Lead Metal Can Package (H)  
Order Number LM715CH or LM715MH  
NS Package Number H10C

**Physical Dimensions** inches (millimeters) (Continued)

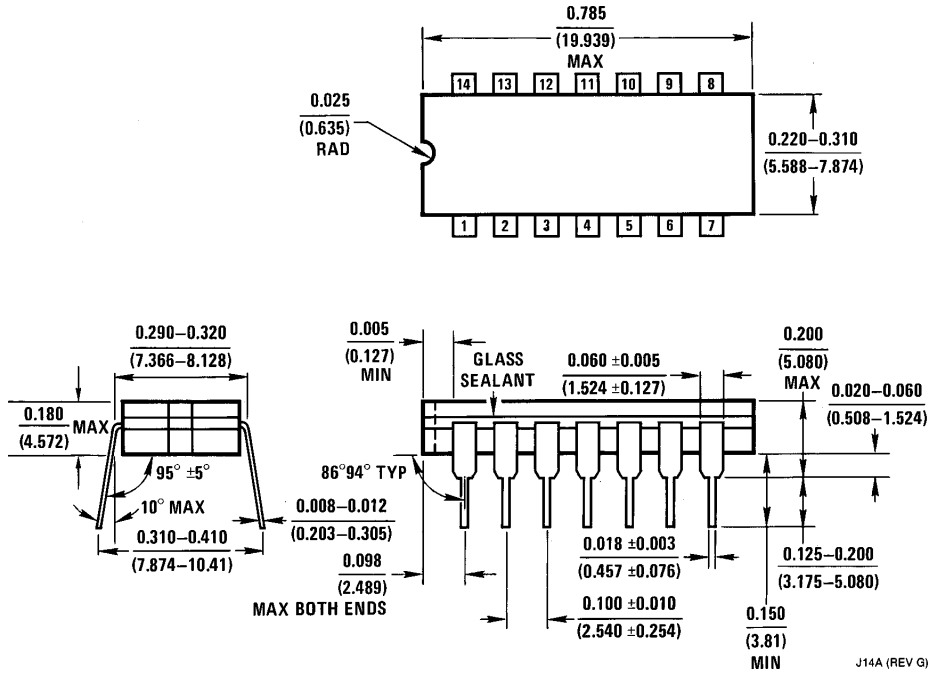

**14-Lead Ceramic Dual-In-Line Package (J)**  
**Order Number LM715CJ or LM715MJ**  
**NS Package Number J14A**

J14A (REV G)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.