

PART NUMBER: VSUU-120

DESCRIPTION: Triple Output Power Supply

Features

- Universal Input Voltage 90-264 VAC, 130-370 VDC, 47-63 Hz
- Internal EMI filter
- Input connector mates with Molex housing 09-50-3051 and Molex 2478 and 2578 series crimp terminal
- Output connector mates with Molex housing 09-50-3131 and Molex 2478 and 2578 series crimp terminal
- Input Surge current, over voltage and over load protection
- Power factor correction
- Power fail detect (optional)
- Class I Insulation
- Size : 3" x 5" x 1.28"(1U)
- Two Year Warranty



Model Number	Output Voltage	Output Current	Total Regulation	Max Output Power
VSUU-120-T312A	+3.3 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.6~6 A	5%	120 W
	-12 VDC	0~0.8 A	5%	120 W
VSUU-120-T312B	+3.3 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.6~6 A	5%	120 W
	+12 VDC	0~0.8 A	5%	120 W
VSUU-120-T125A	+5 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.8~6 A	5%	120 W
	-5 VDC	0~0.8 A	5%	120 W
VSUU-120-T125B	+5 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.8~6 A	5%	120 W
	+5 VDC	0~0.8 A	5%	120 W
VSUU-120-T512A	+5 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.8~6 A	5%	120 W
	-12 VDC	0~0.8 A	5%	120 W
VSUU-120-T512B	+5 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.8~6 A	5%	120 W
	+12 VDC	0~0.8 A	5%	120 W
VSUU-120-T515A	+5 VDC	1.5~15 A	5%	120 W
	+15 VDC	1.0~6 A	5%	120 W
	-15 VDC	0~0.8 A	5%	120 W
VSUU-120-T515B	+5 VDC	1.5~15 A	5%	120 W
	+15 VDC	1.0~6 A	5%	120 W
	+15 VDC	0~0.8 A	5%	120 W
VSUU-120-T524A	+5 VDC	1.5~15 A	5%	120 W
	+24 VDC	0.45~3.5 A	5%	120 W
	-24 VDC	0.25~0.8 A	5%	120 W
VSUU-120-T524B	+5 VDC	1.5~15 A	5%	120 W
	+24 VDC	0.45~3.5 A	5%	120 W
	+24 VDC	0.25~0.8 A	5%	120 W
VSUU-120-T305A	+5 VDC	1.5~15 A	5%	120 W
	+24 VDC	0.4~3.5 A	5%	120 W
	-12 VDC	0~0.8 A	5%	120 W
VSUU-120-T305B	+5 VDC	1.5~15 A	5%	120 W
	+24 VDC	0.4~3.5 A	5%	120 W
	+12 VDC	0~0.8 A	5%	120 W
VSUU-120-T3125A	+3.3 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.8~6 A	5%	120 W
	-5 VDC	0~0.8 A	5%	120 W
VSUU-120-T3125B	+3.3 VDC	1.5~15 A	5%	120 W
	+12 VDC	0.8~6 A	5%	120 W
	+5 VDC	0~0.8 A	5%	120 W
VSUU-120-T510A	+5 VDC	1.5~15 A	5%	120 W
	+10 VDC	0.6~6 A	5%	120 W
	-10 VDC	0~1.0 A	5%	120 W
VSUU-120-T510B	+5 VDC	1.5~15 A	5%	120 W
	+10 VDC	0.6~6 A	5%	120 W
	+10 VDC	0~1.0 A	5%	120 W
VSUU-120-T3512A	+3.3 VDC	1.5~15 A	5%	91.5 W
	+5 VDC	0.8~6 A	5%	91.5 W
	-12 VDC	0~1.0 A	5%	91.5 W
VSUU-120-T3512B	+3.3 VDC	1.5~15 A	5%	91.5 W
	+5 VDC	0.8~6 A	5%	91.5 W
	+12 VDC	0~1.0 A	5%	91.5 W

Note: Suffix "P" for power fail direct option.

PART NUMBER: VSUU-120

DESCRIPTION: Triple Output Power Supply

Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage		90		264	VAC
				370	VDC
Input Frequency		47		63	Hz
Power Factor Correction	Full load at 90~260VAC	0.95	0.97	1.0	
Output Power Range	at 90 to 264 VAC	0		120	W
Input Current (low line)	Full load at 115VAC			1.7	A
Input Current (high line)	Full load at 230VAC			1.0	A
Low Line Inrush Current	Full load, 25°C, cool start, at 115VAC		12	15	A
High Line Inrush Current	Full load, 25°C, cool start, at 230VAC		26	30	A
Efficiency	Full load, at 230VAC	70	80	88	%
Line Regulation	Full load		0.5	1	%
Load Regulation	at 230VAC		3	5	%
Over Voltage Protection		112		132	%
Over Current Protection		110		150	%
Transient Response	Full load to Half load, at 100VAC			4	mS
Hold-Up Time	Full load, at 110VAC	16			mS
Start up time	Full load, at 100VAC	0.3	1	2	S
Ripple & Noise (Peak to Peak)	Full load, at 90VAC		0.2	1	%
Safety Ground Leakage Current	Full load, at 240VAC		0.4	0.75	mA
Temperature Coefficient	All output	-0.04		0.04	%/°C

Environmental

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		0		70	°C
Storage Temperature		-40		85	°C
Relative Humidity		5		95	%
Derating	Derate linearly from 100% load at 50°C to 50% load at 70°C				

Safety Specifications


Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Dielectric withstanding voltage	Primary to secondary	4242			VDC
Dielectric withstanding voltage	Primary to ground	2121			VDC
Isolation resistance	Test voltage=500VDC	50			MΩ
EMI requirements for CISPR-22	at 220VAC	B			Class
EMI requirements for FCC part-15	at 110 VAC	B			Class
uL approved to EN60950					

V-Infinity reserves the right to make changes to its products or to discontinue any product or service without notice, and to advise customers to verify the most up-to-date product information before placing orders. V-Infinity assumes no liability or responsibility for customer's applications using V-Infinity products other than repair or replacing (at V-I's option) V-Infinity products not meeting V-I's published specifications. Nothing will be covered outside of standard product warranty.

PART NUMBER: VSUU-120

DESCRIPTION: Triple Output Power Supply

Mechanical Specifications

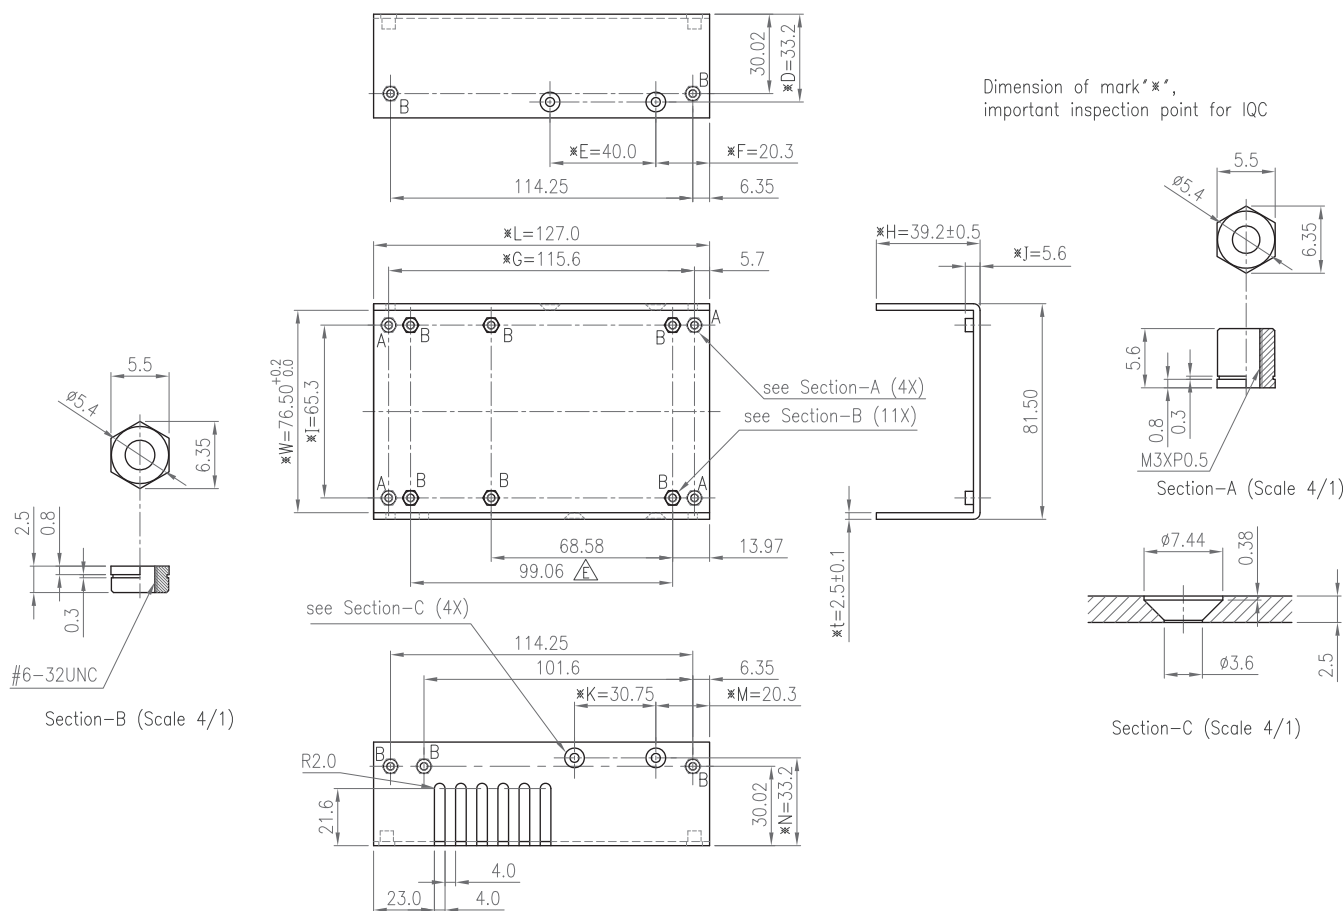

Note:

1. Dimensions are shown in mm (inches).
2. Weight: 330~380 g (approx.)
3. Input connector mates with Molex housing 09-50-3051 and Molex 2478 or 2578 series crimp terminal.
4. Output connector mates with Molex housing 09-50-3131 and Molex 2478 or 2578 series crimp terminal.

Pin	1	2	3	4	5	6	7	8	9	10	11	12	13
Model													(optional)
VSUU-120-TXXX	Vo1	Vo1	Vo2	Vo2	Vo2	Vo2	COM	COM	COM	Vo3	COM	COM	PFD

