


**Features:**

- Universal AC input/ Full range
- Built-in active PFC function, PF>0.93
- High Efficiency, and High Reliability
- Output Protections: OLP/OVP/SCP
- All using 105°C long life electrolytic capacitors.
- 100% full load burn-in test



Model	QPDF-150-5	QPDF-150-12	QPDF-150-15	QPDF-150-24	QPDF-150-36	QPDF-150-48
<b>Output Characteristics</b>						
DC Output	5V	12V	15V	24V	36V	48V
Rated Current	30A	12.5A	10A	6.3A	4.1A	3.2A
Current Range	0~30A	0~12.5A	0~10A	0~6.3A	0~4.1A	0~3.2A
Ripple and Noise	100mV	100mV	100mV	150mV	240mV	240mV
Voltage ADJ. Range	4V~6V	10V~14V	12V~18V	20V~28V	32V~40V	42V~54V
Voltage Accuracy	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%
Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Load Regulation	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
Set-up Time	<2.0s (115VAC input, full load); <1.0s (230VAC input, full load)					
Hold-up Time	>20ms (115VAC/230VAC input, full load)					
Temperature Coefficient	±0.03%/°C					
Overshoot and Undershoot	<5.0%					
<b>Input Characteristics</b>						
Voltage Range	85VAC~264VAC					
Frequency Range	47Hz~63Hz					
Power Factor (Typical)	PF>0.98/115VAC PF>0.94/230VAC					
Efficiency (Typical)	115VAC Input	80%	83%	83%	83%	83%
	230VAC Input	82%	86%	86%	86%	86%
AC Current (max)	2.0A					
Inrush Current (Typical)	30A@115VAC Cold start 60A@230VAC Cold start					
Leakage Current	Input-Output: <0.25mA Input-PG: <3.5mA					
<b>Protection</b>						
Over Load (OLP)	105%~150% of rated output current, hiccup mode, auto recovery					
Over Voltage (OVP)	110%~150% of rated output voltage, shut down, re-power on to recover (5V)					
	110%~140% of rated output voltage, shut down, re-power on to recover (12V, 15V, 24V)					
	110%~130% of rated output voltage, shut down, re-power on to recover (48V)					
Short Circuit (SCP)	Long-term mode, auto recovery					
<b>Environmental Characteristics</b>						
Operating Amb. Temp. & Hum	-10°C~60°C; 20%~90% RH Non-Condensing					
Storage Temp. & Hum	-20°C~85°C; 10%~95% RH Non-Condensing					
Safety Standards	UL60950-1; EN60950-1: 2006					
Withstand Voltage	Primary-Secondary: 3.0KVAC;≤10mA. Primary-PG: 1.5KVAC;≤10mA. Secondary-PG: 0.5KVDC;≤10mA					
Isolation Resistance	≥100M ohms					
EMI Conduction & Radiation	Compliance to EN55022(CISPR22) Class B					
Harmonic Current	Compliance to EN61000-3-2, 17625.1-2003					
EMS Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, light industry level, criteria A					
<b>General Characteristics</b>						
MTBF (MIL-HDBK-217F)	More than 100,000Hrs (25°C, Full load)					
Dimension (LxWxH)	194x99x50mm					
Packing	20PCS/CTN. G.W: 15.2kgs					
Cooling Method	Cooling by free air convection					

## MECHANICAL SPECIFICATIONS

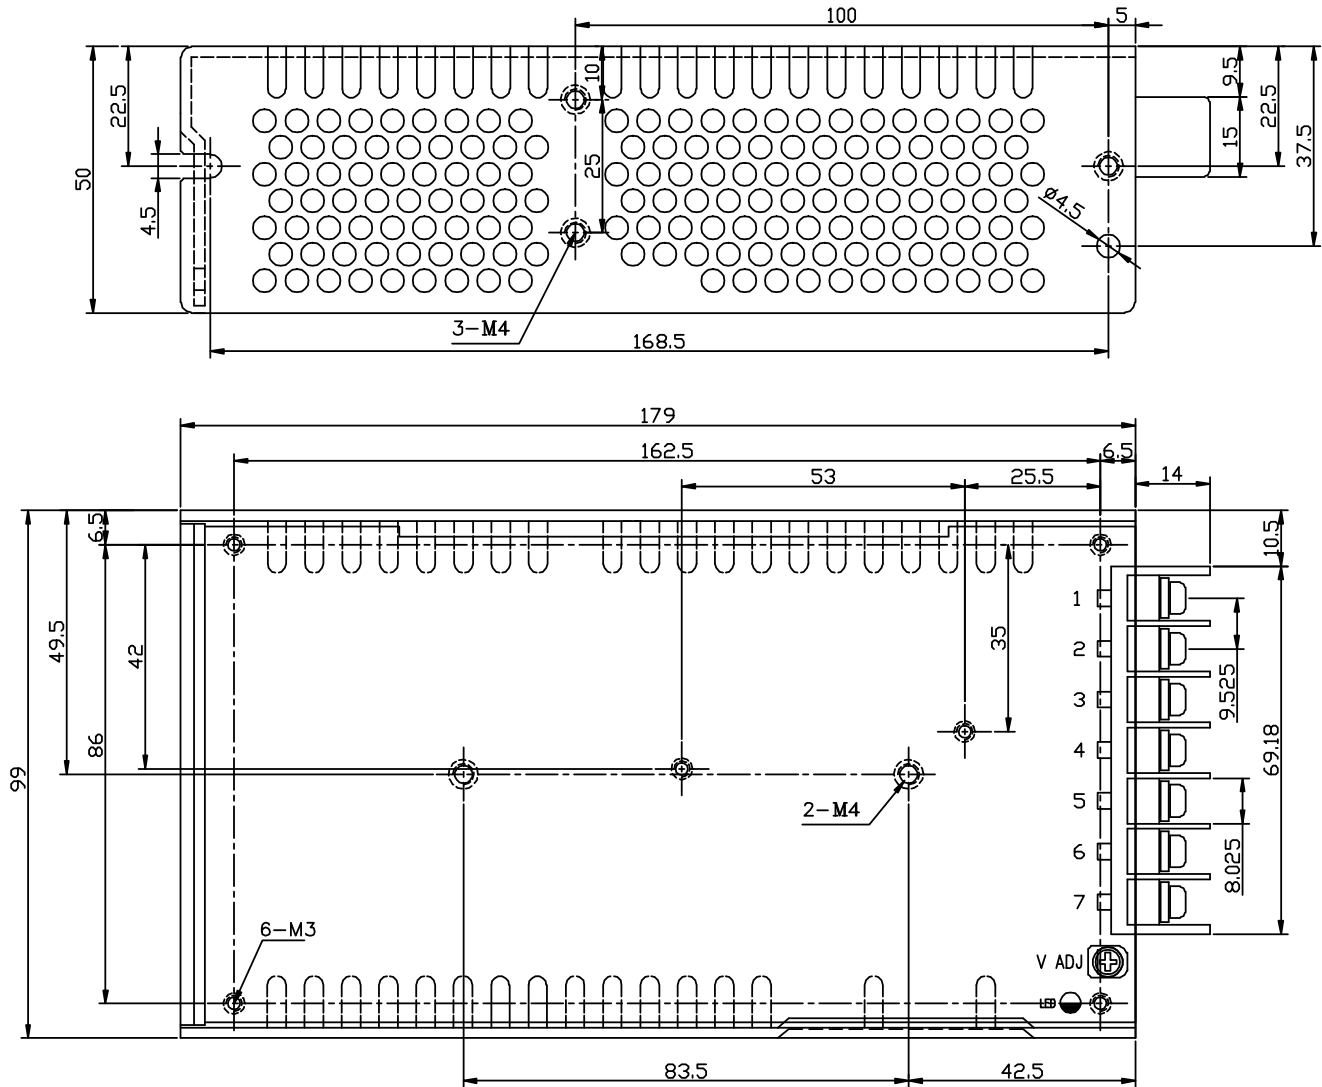

Pin No.	Assignment
1	AC-L
2	AC-N
3	F.G
4,5	DC output -V
6,7	DC output +V

UNIT: mm